



इंजीनियरिंग प्रोजेक्ट्स (इंडिया) लि.

(भारत सरकार का उद्यम)

ENGINEERING PROJECTS (INDIA) LTD.

(A Government of India Enterprise)

TENDER DOCUMENT

NIT No.: EPI/CO/CON/977/861

Dated: 25.09.2024

FOR

Tender for Construction of E-Type Staff Quarter (S+4) For ICDS Staff Quarter at Dhenkanal, Odisha. (2nd Call)

VOLUME – II

Technical Specifications and Drawings

ENGINEERING PROJECTS (INDIA) LIMITED

(A GOVT. OF INDIA ENTERPRISE)

Core-3, Scope Complex,



7, Lodhi Road, New Delhi-110003

TEL NO: 011-24361666, FAX NO. 011- 24363426

TECHNICAL SPECIFICATION

- 1.0 The work in general shall be carried out as per latest Odisha PWD specification for PWD SOR items, unless otherwise specified in the nomenclature of the individual item or in the particular specifications of concerned items of works. For items not covered under Odisha SOR & specification, the work shall be done as per latest CPWD specifications and for Items not covered under both then as per latest relevant BIS codes of practice.
- 2.0 Thermo Mechanically Treated bars conforming to IS: 1786, Fe 500 grade as required, from approved manufacturers viz SAIL/RINL/TISCO/JINDAL/SHYAM/Any other Brand approved by Works Department, Govt. of Odisha shall be used. In case of non-availability of steel of these makes, TMT bars of other manufacturers as per IS 1786, Fe 500 grade as required, may be allowed to be used with the prior approval of Engineer-in-charge. In case TMT bars from manufacturer other than SAIL/RINL/TISCO/JINDAL/SHYAM/ Any other Brand approved by Works Department, Govt. of Odisha is allowed to be used, a deduction of RS. 4(FOUR) per Kg shall be made from the bills of the contractor. The other provision of clause 45.2 of GCC remains unchanged.
- 3.0 In case of non-availability of any specification in the above paras or any overlapping provision, non-clarity on any issue, applicability of particular provision out of above, shall be decided by Engineer-in-Charge whose decision shall be final & binding on the contractor.
- 4.0 Flooring works shall be executed as per the approved drawings / design & specifications. The pattern shown in the drawings, if any, and be modified as per the site requirements by Engineer-in-charge/client within the proportions of the flooring materials to be provided and nothing extra whatsoever shall be payable over and above the rate quoted.
- 5.0 The water proofing for the terraces, underground tanks / toilet floor etc, shall be got executed only through the authorized applicators of the manufacturers and the guarantee for the same shall be in the name of EPI / owner for a period of ten years after the expiry of defect period of defect period liability on the prescribed format given in the GCC.
- 6.0 SCI pipes for sanitary and GI pipes for water supply if fixed in RCC members like columns, beams etc. shall be fixed with scrub plugs.

- 7.0 Welding wherever required in the work like in grill, railing etc. shall be done in full length of the contract area and grinding shall be done properly to get an even surface, SGRC covers for manholes etc. if provided, shall have name of owner / client and year of manufacturer as engraved.
- 8.0 The contractor shall make necessary safety arrangements at site including as mentioned in GCC and indemnity EPI against any consequence of accident at site.
- 9.0 The contractor shall have to execute the work in pace and in such a way to facilitate agencies engaged simultaneously for execution of other works required for completion of the building. No claim shall be entertained due to work being executed in the above circumstances.
- 10.0 Unless otherwise specified in the schedule of quantities, the rates tendered by the Contractor shall be all inclusive and shall apply to all heights, floors including Terrance, leads and depths and nothing extra shall be payable on this account.
- 11.0 The tender drawings are for indicative purpose only. It may vary as per specification and actual site condition.

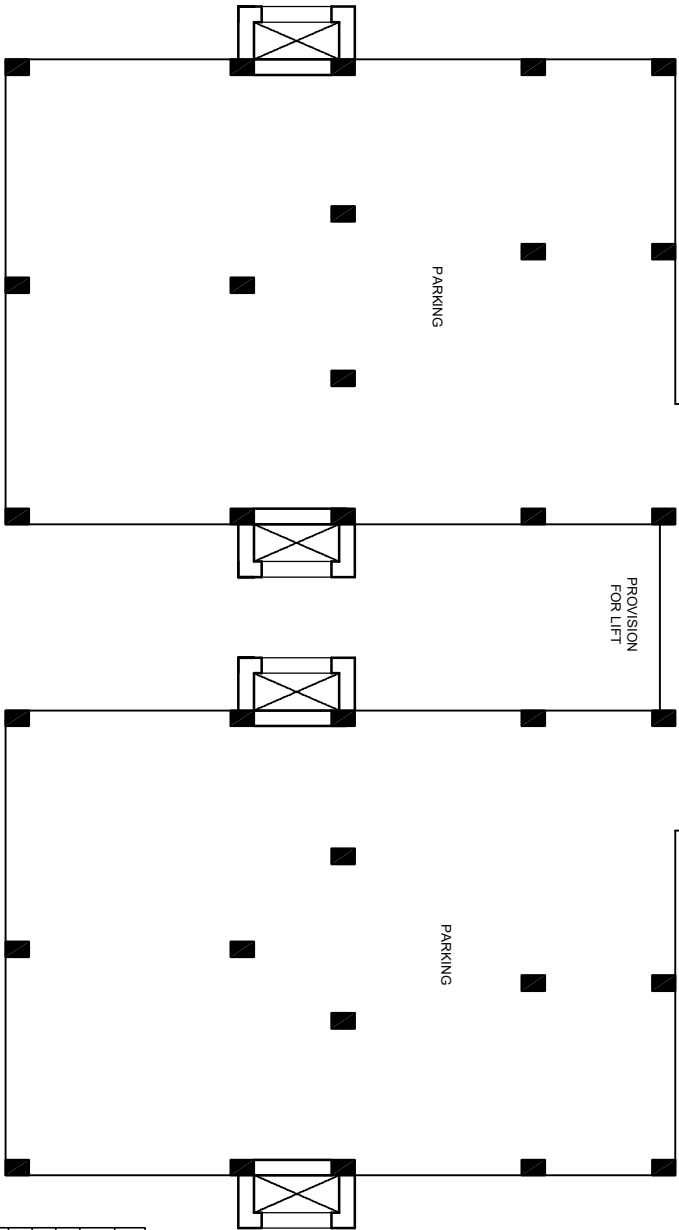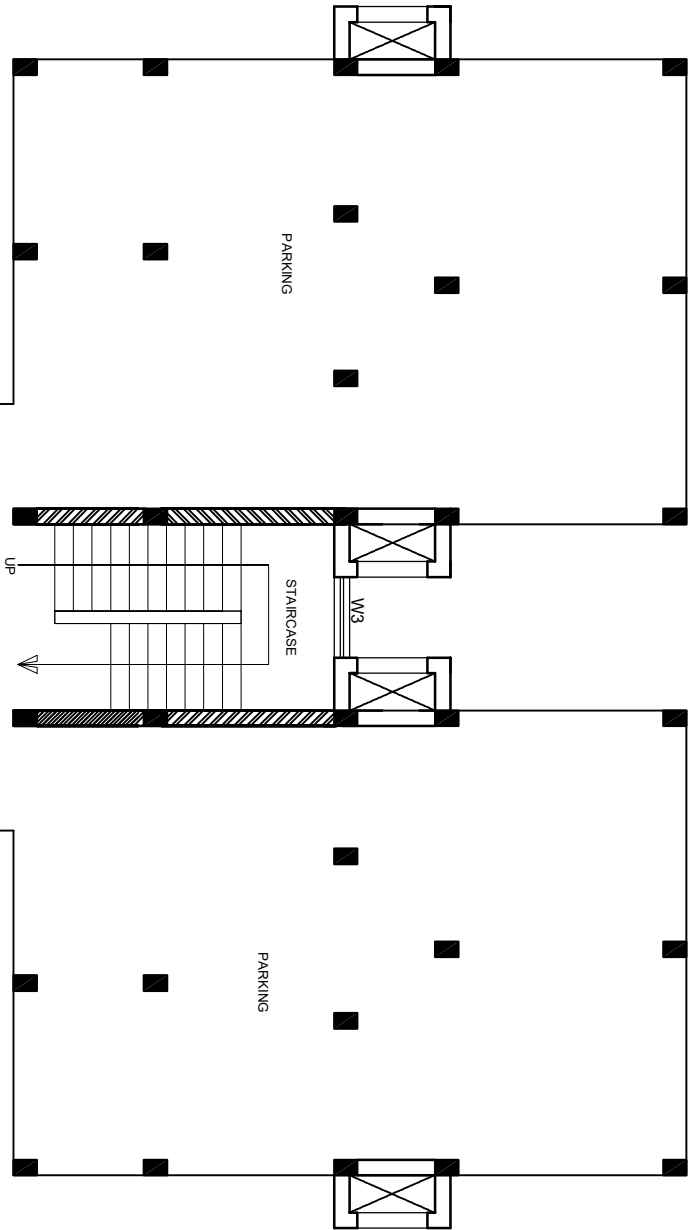

STILT FLOOR PLAN
AREA - 29.94SQM(LOBBY+STAIR CASE))
AREA - 324.55SQM(PARKING)

DOOR WINDOW SCHEDULE			
OPENING MKD	SILL LVL. (MM)	LINTEL LVL. (MM)	DESCRIPTION
D-1060 X 2100	00	2100	FLUSH DOOR
D1-900 X 2100	00	2100	FLUSH DOOR
D2-750 X 2100	00	2100	PVC DOOR
DM4800 X 2100	00	2100	UPVC WINDOW
WM-1500 X 1350	750	2100	UPVC WINDOW
WM-1350 X 1350	750	2100	UPVC WINDOW
WM2-900 X 1050	1050	2100	UPVC WINDOW
V- 600 X 600	1500	2100	GLAZED VENTILATOR
WM3-1200 X 1350	REFER TO STAIRCASE SECTION FIXED GLAZED WINDOW		

E-TYPE - 2BHK STAFF QUARTER (S+4)

JOB TITLE :-

DRAWING TITLE :-

FLOOR PLANS


EXECUTING AGENCY :-



ਭਾਰਤੀ ਪ੍ਰੋਜੈਕਟਾਂ (ਭਾਰਤ) ਲਿਮਿਟਿਡ
(Private Venture and Public)
ENGINEERING PROJECTS (INDIA) LTD.
(A Government of India Enterprise)

PROJECT CLIENT :-

DEPARTMENT OF WOMEN
& CHILD DEVELOPEMENT

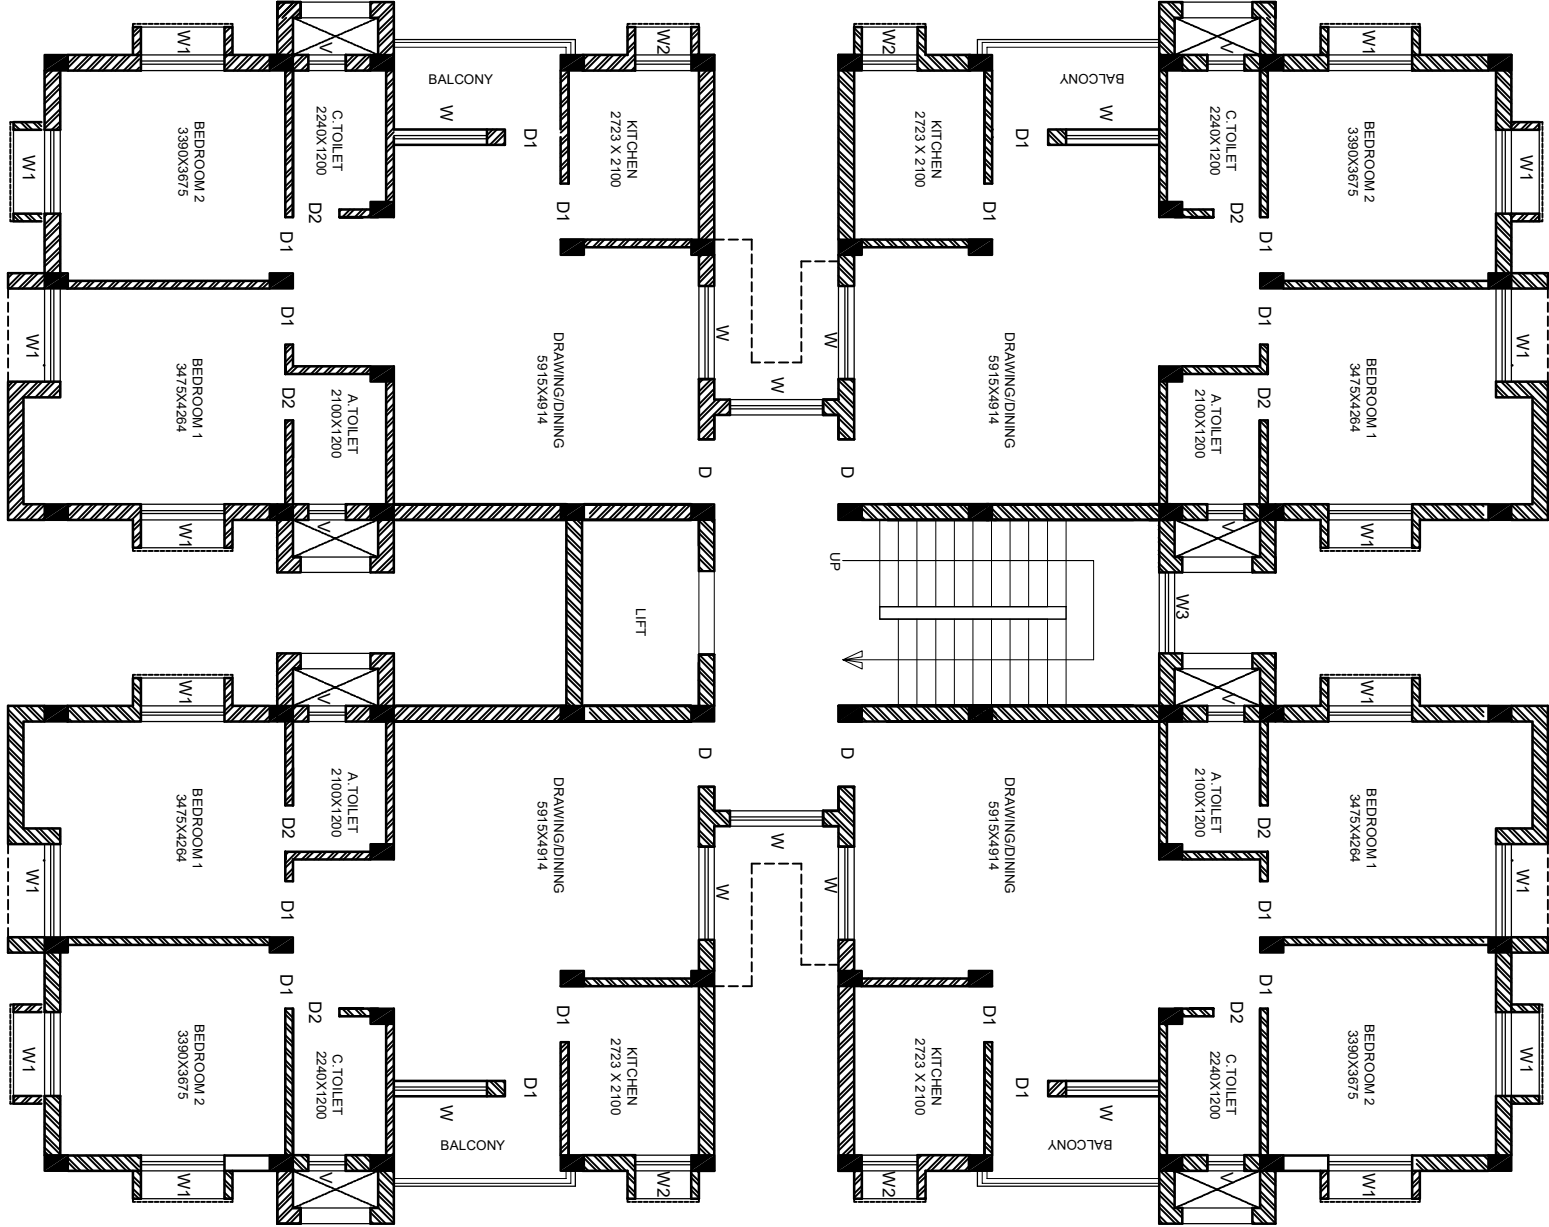

TYPICAL FLOOR PLAN
AREA - 364.36SQM(EACH FLOOR)
AREA - 83.65SQM(EACH UNIT)

NOTE:-> All dimensions are in mm
-> Drawings are not to be scaled only
written dimensions to be followed

JOB TITLE :-

DRAWING TITLE :-

DRAWING NO :-
SCALE :- NTS

PROJECT CLIENT :-

DEPARTMENT OF WOMEN
& CHILD DEVELOPEMENT