


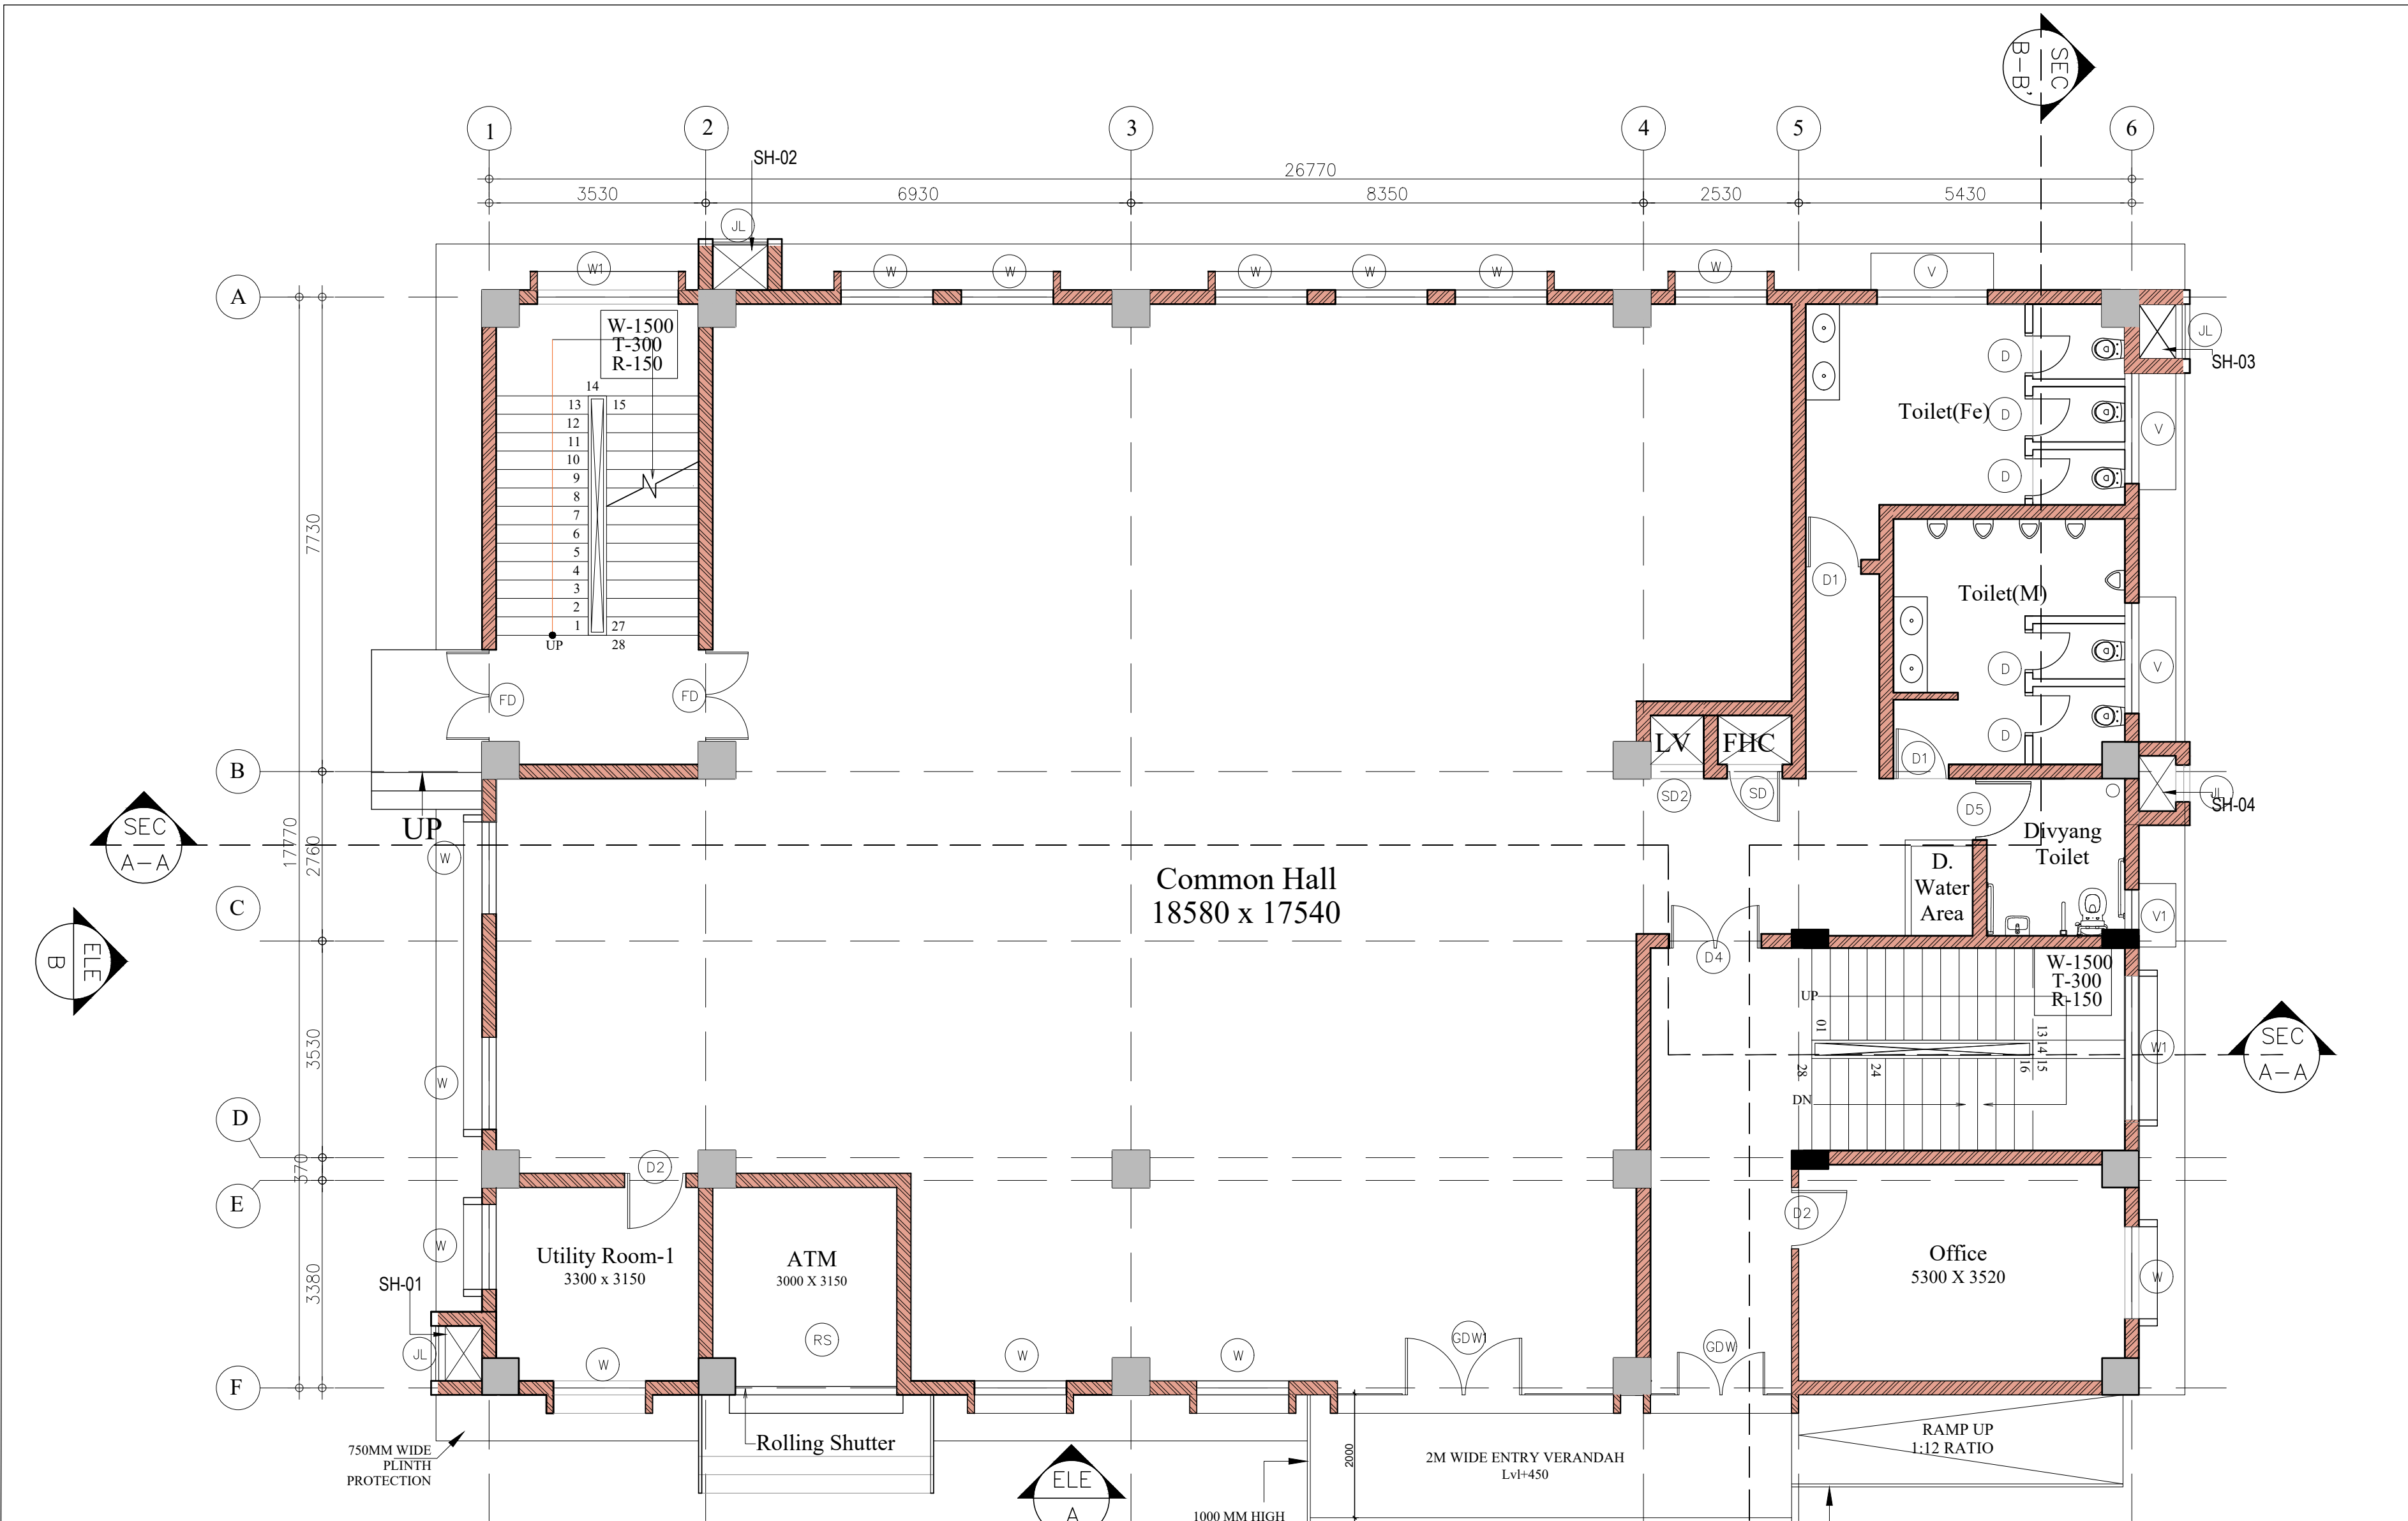


SCHEDULE OF DOORS - (Ground floor to Terrace floor)							
SL. NO	TYPE	NOS.	WIDTH	HEIGHT (from FFL.)	CILL (from FFL.)	LINTEL (from FFL.)	REMARKS
SCHEDULE OF DOORS							
1.	D	---	750	2100	00	2100	WC AND BATH WPC DOOR PANEL WITH FRAME AS/DRAWING/SPECS
2.	D1	---	900	2100	00	2100	TOILETS WPC DOOR PANEL WITH FRAME AS/DRAWING/SPECS
3.	D2	---	1000	2100	00	2100	ROOMS SINGLE LEAF TEAK WOOD FRAME, FLUSH DOOR AS/DRAWING/SPECS
4.	D4	---	1500	2100	00	2100	PASSAGE DOUBLE LEAF TEAK WOOD FRAME, FLUSH DOOR AS/DRAWING/SPECS
5.	D5	---	1050	2100	00	2100	PWD TOILET WPC DOOR PANEL WITH FRAME AS/DRAWING/SPECS
6.	GDW	---	2300	2400	00	2400	MAIN ENTRY DOUBLE-LEAF GLASS DOOR WITH FRAME LESS FIXED GLAZING AS/DRAWING/SPECS
7.	GDW1	---	4500	2400	00	2400	COMMON HALL DOUBLE-LEAF GLASS DOOR WITH FRAME LESS FIXED GLAZING AS/DRAWING/SPECS
8.	GDW2	---	1500	2400	00	2400	AS PER DRAWING DOUBLE-LEAF GLASS DOOR WITH FRAME LESS FIXED GLAZING
9.	FD	---	1500	2100	00	2100	STAIRCASE 2HR FIRE RATED METAL FIRE DOOR
10.	RS	---	2630	2400	00	2400	ATM ROOM ROLLING SHUTTER AS/DRAWING/SPECS
11.	SD	---	900	2100	100	2100	FHC SHAFT M.S.SINGLE LEAF DOOR WITH GLASS (FHC Shaft Door as per NBC & latest CPWD Guideline)
12.	SD2	---	600	2100	00	2100	LV SHAFT M.S.SINGLE LEAF MS DOOR AS/DRAWING/SPECS
13.	SD4	---	1200	2100	00	2100	MUMTY DOOR M.S.DOUBLE LEAF DOOR AS/DRAWING/SPECS

SCHEDULE OF WINDOWS - (Ground floor to Terrace floor)							
SL. NO	TYPE	NOS.	WIDTH	HEIGHT	SILL (from FFL)	LINTEL (from FFL)	REMARKS
1.	W	---	1500	1200	900	2100	POWDER COATED ALUMINUM FRAMED SLIDING WINDOW - THREE TRACK SYSTEM WITH WIRE MESH AS/DRAWING/SPECS
2.	W1	---	2300	1100	1000	2100	POWDER COATED ALUMINUM FRAMED SLIDING WINDOW - TWO TRACK SYSTEM AS/DRAWING/SPECS
3.	W2	---	2500	1200	900	2100	POWDER COATED ALUMINUM FRAMED SLIDING WINDOW - THREE TRACK SYSTEM WITH WIRE MESH AS/DRAWING/SPECS
4.	W3	---	1500	1200	900	2100	POWDER COATED ALUMINUM FRAMED SLIDING WINDOW - TWO TRACK SYSTEM AS/DRAWING/SPECS

SCHEDULE OF VENTILATORS - (Ground floor to Terrace floor)							
SL. NO	TYPE	NOS.	WIDTH	HEIGHT	SILL (from FFL)	LINTEL (from FFL)	REMARKS
1.	V	---	1800	600	2100	2700	POWDER-COATED ALUMINUM FRAME VENTILATOR WITH FIXED FROSTED GLASS PANELS AND INTEGRATED EXHAUST FAN AS/DRAWING/SPECS
2.	V1	---	750	875	1225	2100	POWDER-COATED ALUMINUM FRAME VENTILATOR WITH FIXED FROSTED GLASS PANELS AND INTEGRATED EXHAUST FAN AS/DRAWING/SPECS

SCHEDULE OF SHAFT JALI - (Ground floor to Terrace floor)							
SL. NO	TYPE	NOS.	WIDTH	HEIGHT	SILL (from FFL)	LINTEL (from FFL)	REMARKS
1.	JL	---	600	2400	+00		BEAM BOTTOM/AS PER SITE ALUMINUM OPENABLE LOUVERED DOOR

KEY PLAN

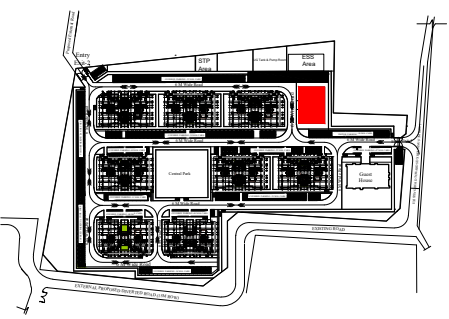

- NOTES
- ALL DIMENSIONS ARE IN MM, UNLESS NOTED OTHERWISE.
 - WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
 - ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
 - THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.
 - STRUCTURE DRAWING TO BE FOLLOWED FOR COLUMN SIZES

Sn.No.	Description	Area (Sqm)
01	Ground Floor Area	490 sqm
02	First Floor Area	490 sqm
03	Mumty Area	55 sqm

SHAFT SCHEDULE				
SL. NO	TYPE	WIDTH	LENGTH	REMARKS
1.	SH-01	900	600	ELECTRICAL SHAFT
2.	SH-02	900	600	RAIN WATER SHAFT
3.	SH- 03	900	600	PLUMBING SHAFT
4.	SH- 04	900	600	RAIN WATER SHAFT
5.	SH-05	1200	800	FHC SHAFT
6.	SH-06	850	870	LV SHAFT

TENDER DRAWING

CLIENT

**OIL INDIA LIMITED**
(A Govt. of India Enterprise)

CONSULTANT

**RITES**
THE INFRASTRUCTURE PEOPLE
(A Govt. of India Enterprise)

PROJECT

BQ WORKMEN HOUSING

BUILDING

COMMUNITY CENTRE (G+1)

DRAWING TITLE

GROUND FLOOR PLAN

DRG. NO.

MITES/BLD/AR/TD/047

NORTH




SCALE

NTS

DATE

JULY 2025

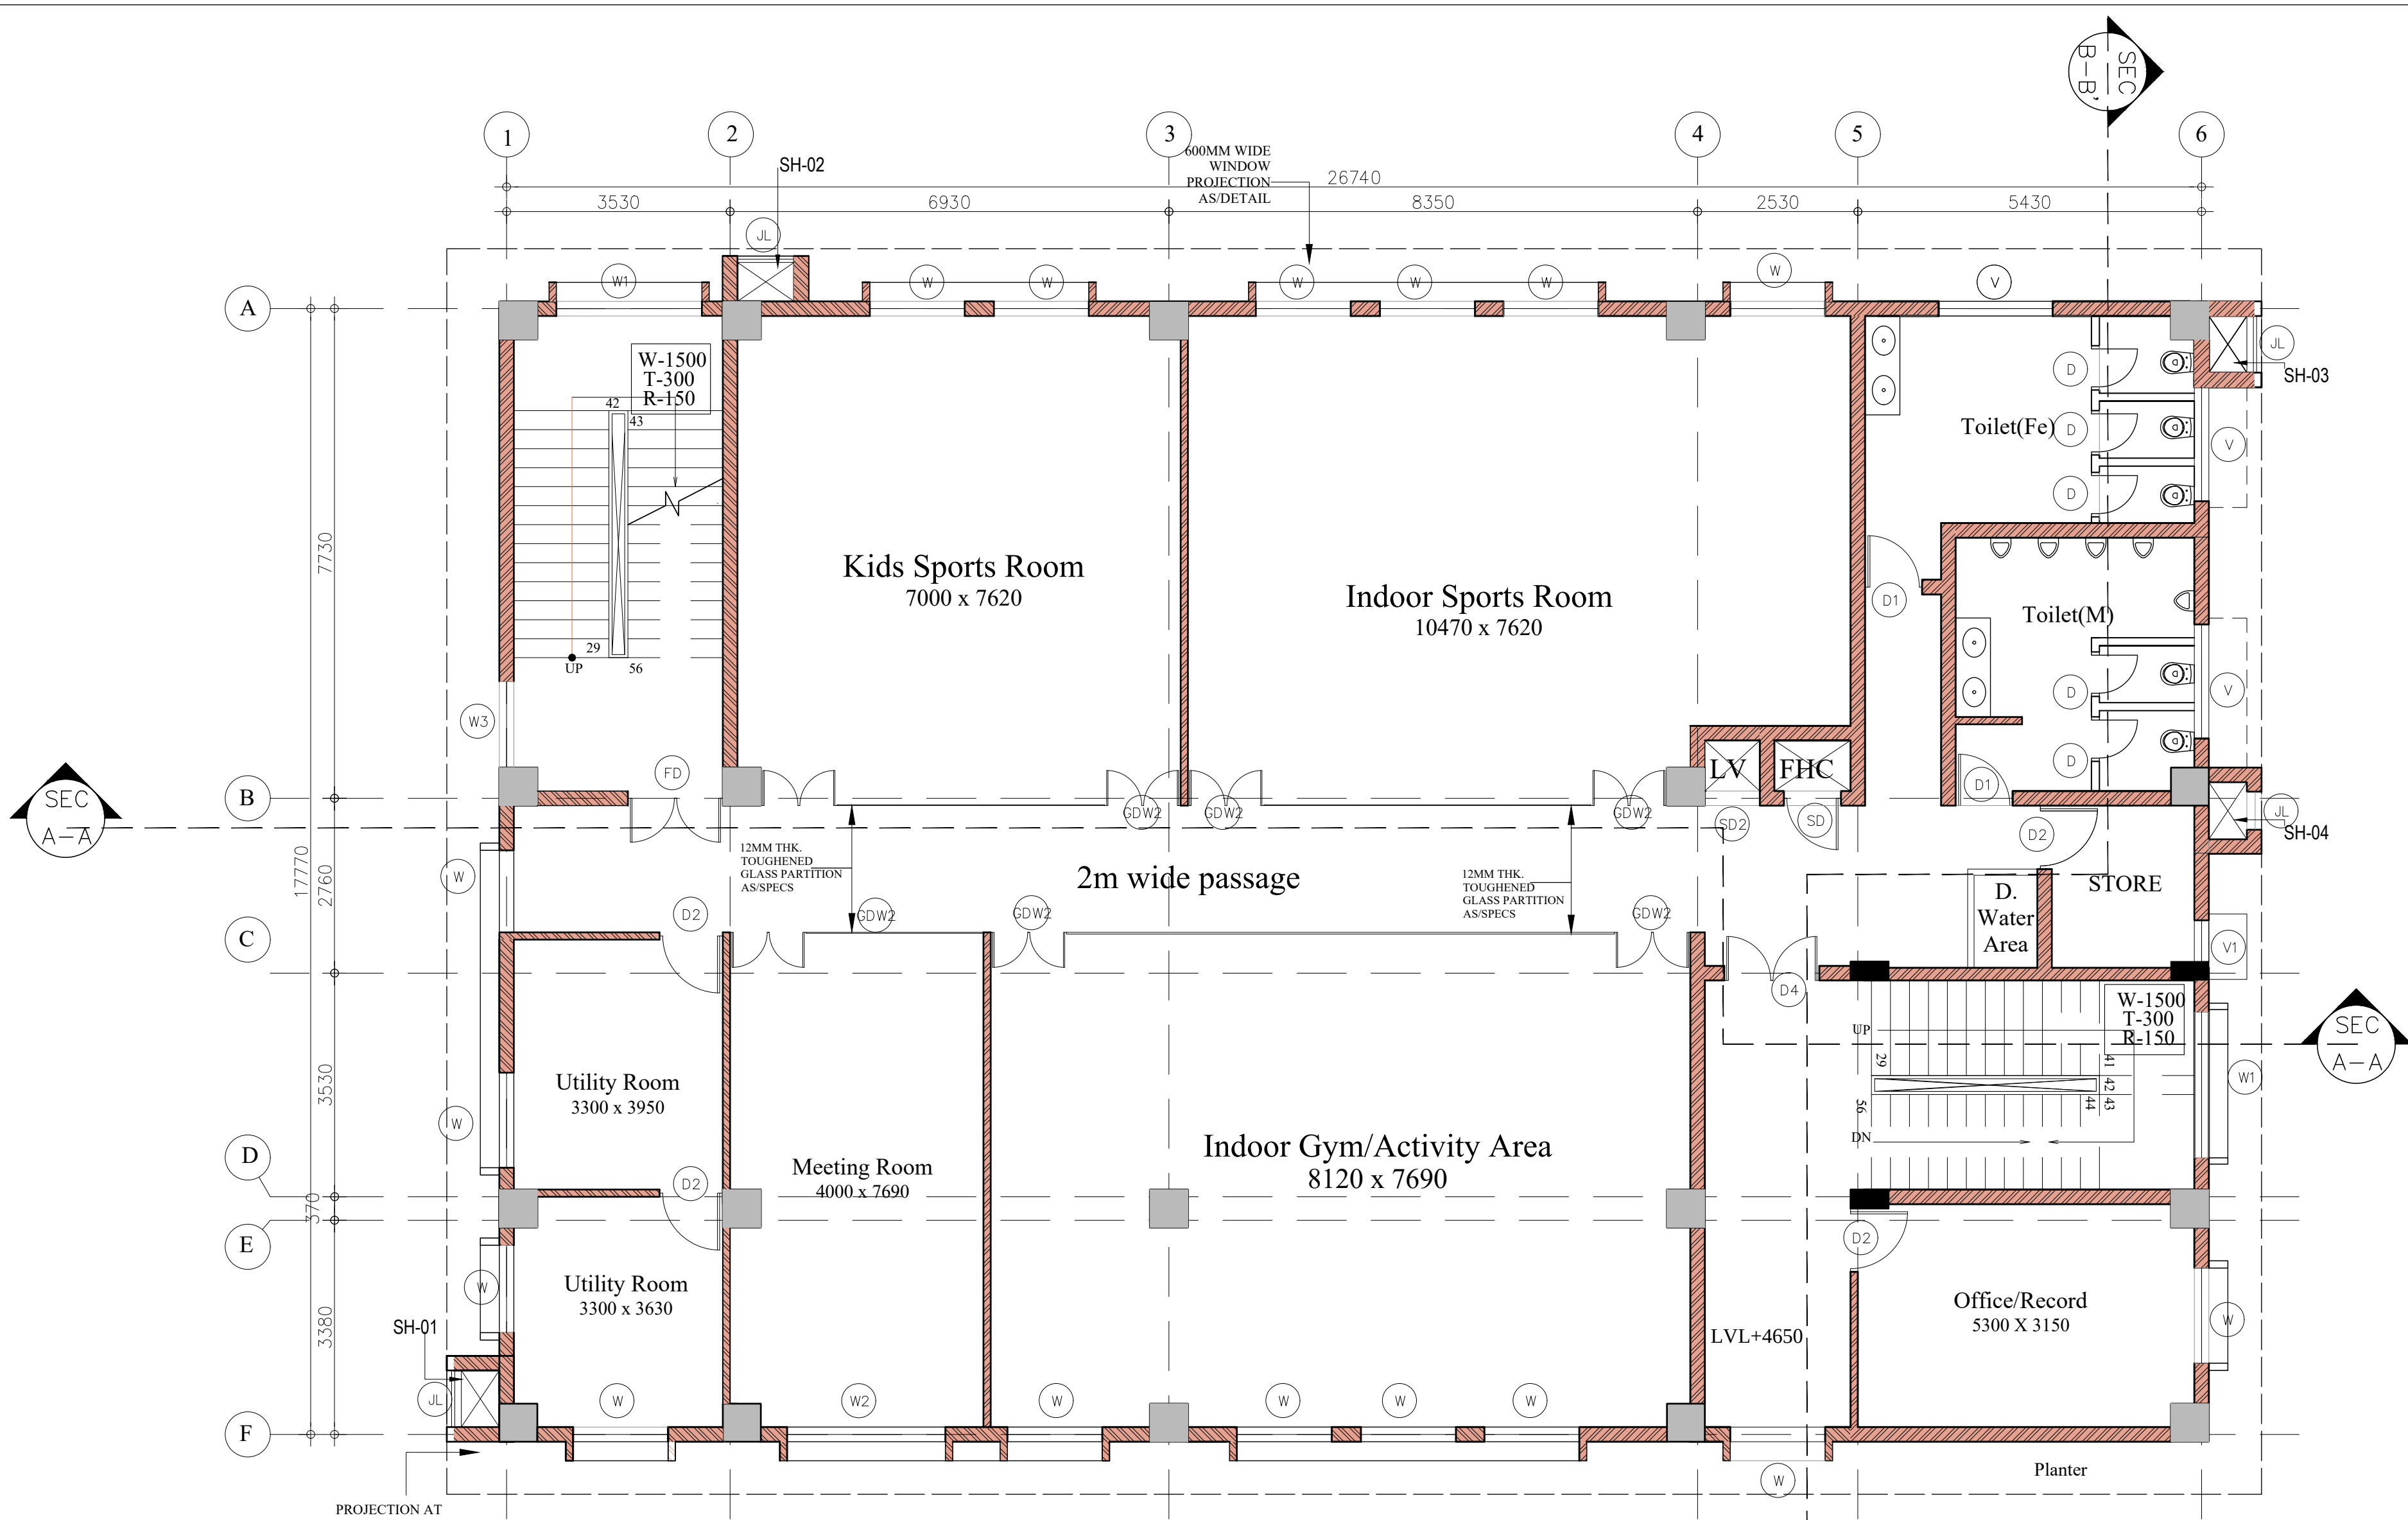

SCHEDULE OF DOORS - (Ground floor to Terrace floor)							
SL. NO	TYPE	NOS.	WIDTH	HEIGHT (from FFL.)	CILL (from FFL.)	LINTEL (from FFL.)	LOCATION
REMARKS							
SCHEDULE OF DOORS							
1.	D	---	750	2100	00	2100	WC AND BATH
2.	D1	---	900	2100	00	2100	TOILETS
3.	D2	---	1000	2100	00	2100	ROOMS
4.	D4	---	1500	2100	00	2100	PASSAGE
5.	D5	---	1050	2100	00	2100	PWD TOILET
6.	GDW	---	2300	2400	00	2400	MAIN ENTRY
7.	GDW1	---	4500	2400	00	2400	COMMON HALL
8.	GDW2	---	1500	2400	00	2400	AS PER DRAWING
9.	FD	---	1500	2100	00	2100	STAIRCASE
10.	RS	---	2630	2400	00	2400	ATM ROOM
11.	SD	---	900	2100	100	2100	FHC SHAFT
12.	SD2	---	600	2100	00	2100	LV SHAFT
13.	SD4	---	1200	2100	00	2100	MUMTY DOOR
REMARKS							
WPC DOOR PANEL WITH FRAME AS/DRAWING/SPECS							
WPC DOOR PANEL WITH FRAME AS/DRAWING/SPECS							
SINGLE LEAF TEAK WOOD FRAME, FLUSH DOOR AS/DRAWING/SPECS							
DOUBLE LEAF TEAK WOOD FRAME, FLUSH DOOR AS/DRAWING/SPECS							
WPC DOOR PANEL WITH FRAME AS/DRAWING/SPECS							
DOUBLE-LEAF GLASS DOOR WITH FRAME LESS FIXED GLAZING AS/DRAWING/SPECS							
DOUBLE-LEAF GLASS DOOR WITH FRAME LESS FIXED GLAZING AS/DRAWING/SPECS							
DOUBLE-LEAF GLASS DOOR WITH FRAME LESS FIXED GLAZING AS/DRAWING/SPECS							
2HR FIRE RATED METAL FIRE DOOR							
ROLLING SHUTTER AS/DRAWING/SPECS							
M.S.SINGLE LEAF DOOR WITH GLASS (FHC Shaft Door as per NBC & latest CPWD Guideline)							
M.S.SINGLE LEAF MS DOOR AS/DRAWING/SPECS							
M.S.DOUBLE LEAF DOOR AS/DRAWING/SPECS							

SCHEDULE OF WINDOWS - (Ground floor to Terrace floor)							
SL. NO	TYPE	NOS.	WIDTH	HEIGHT	SILL (from FFL)	LINTEL (from FFL)	REMARKS
1.	W	---	1500	1200	900	2100	POWDER COATED ALUMINUM FRAMED SLIDING WINDOW - THREE TRACK SYSTEM WITH WIRE MESH AS/DRAWING/SPECS
2.	W1	---	2300	1100	1000	2100	POWDER COATED ALUMINUM FRAMED SLIDING WINDOW - TWO TRACK SYSTEM AS/DRAWING/SPECS
3.	W2	---	2500	1200	900	2100	POWDER COATED ALUMINUM FRAMED SLIDING WINDOW - THREE TRACK SYSTEM WITH WIRE MESH AS/DRAWING/SPECS
4.	W3	---	1500	1200	900	2100	POWDER COATED ALUMINUM FRAMED SLIDING WINDOW - TWO TRACK SYSTEM AS/DRAWING/SPECS
SCHEDULE OF VENTILATORS - (Ground floor to Terrace floor)							
SL. NO	TYPE	NOS.	WIDTH	HEIGHT	SILL (from FFL)	LINTEL (from FFL)	REMARKS
1.	V	---	1800	600	2100	2700	POWDER-COATED ALUMINUM FRAME VENTILATOR WITH FIXED FROSTED GLASS PANELS AND INTEGRATED EXHAUST FAN AS/DRAWING/SPECS
2.	V1	---	750	875	1225	2100	POWDER-COATED ALUMINUM FRAME VENTILATOR WITH FIXED FROSTED GLASS PANELS AND INTEGRATED EXHAUST FAN AS/DRAWING/SPECS

SCHEDULE OF SHAFT JALI - (Ground floor to Terrace floor)							
SL. NO	TYPE	NOS.	WIDTH	HEIGHT	SILL (from FFL)	LINTEL (from FFL)	REMARKS
1.	JL	---	600	2400	+00	BEAM BOTTOM/AS PER SITE	ALUMINUM OPENABLE LOUVERED DOOR

KEY PLAN

NOTES

1. ALL DIMENSIONS ARE IN MM, UNLESS NOTED OTHERWISE.

2. WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.

3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.

4. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.

5. STRUCTURE DRAWING TO BE FOLLOWED FOR COLUMN SIZES

Sn.No.	Description	Area (Sqm)
01	Ground Floor Area	490 sqm
02	First Floor Area	490 sqm
03	Mumty Area	55 sqm

TENDER DRAWING

CLIENT

OIL INDIA LIMITED
(A Govt. of India Enterprise)

CONSULTANT

RITES
THE INFRASTRUCTURE PEOPLE
(A Govt. of India Enterprise)

PROJECT

BQ WORKMEN HOUSING

BUILDING

COMMUNITY CENTRE (G+1)

DRAWING TITLE

FIRST FLOOR PLAN

DRG. NO.

MITES/BLD/AR/TD/048



NORTH

SCALE

NTS

DATE

JULY 2025

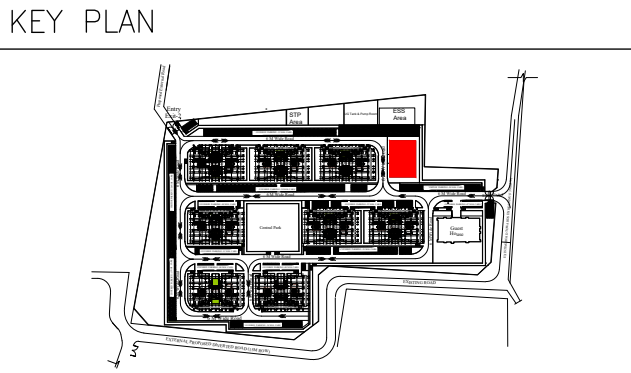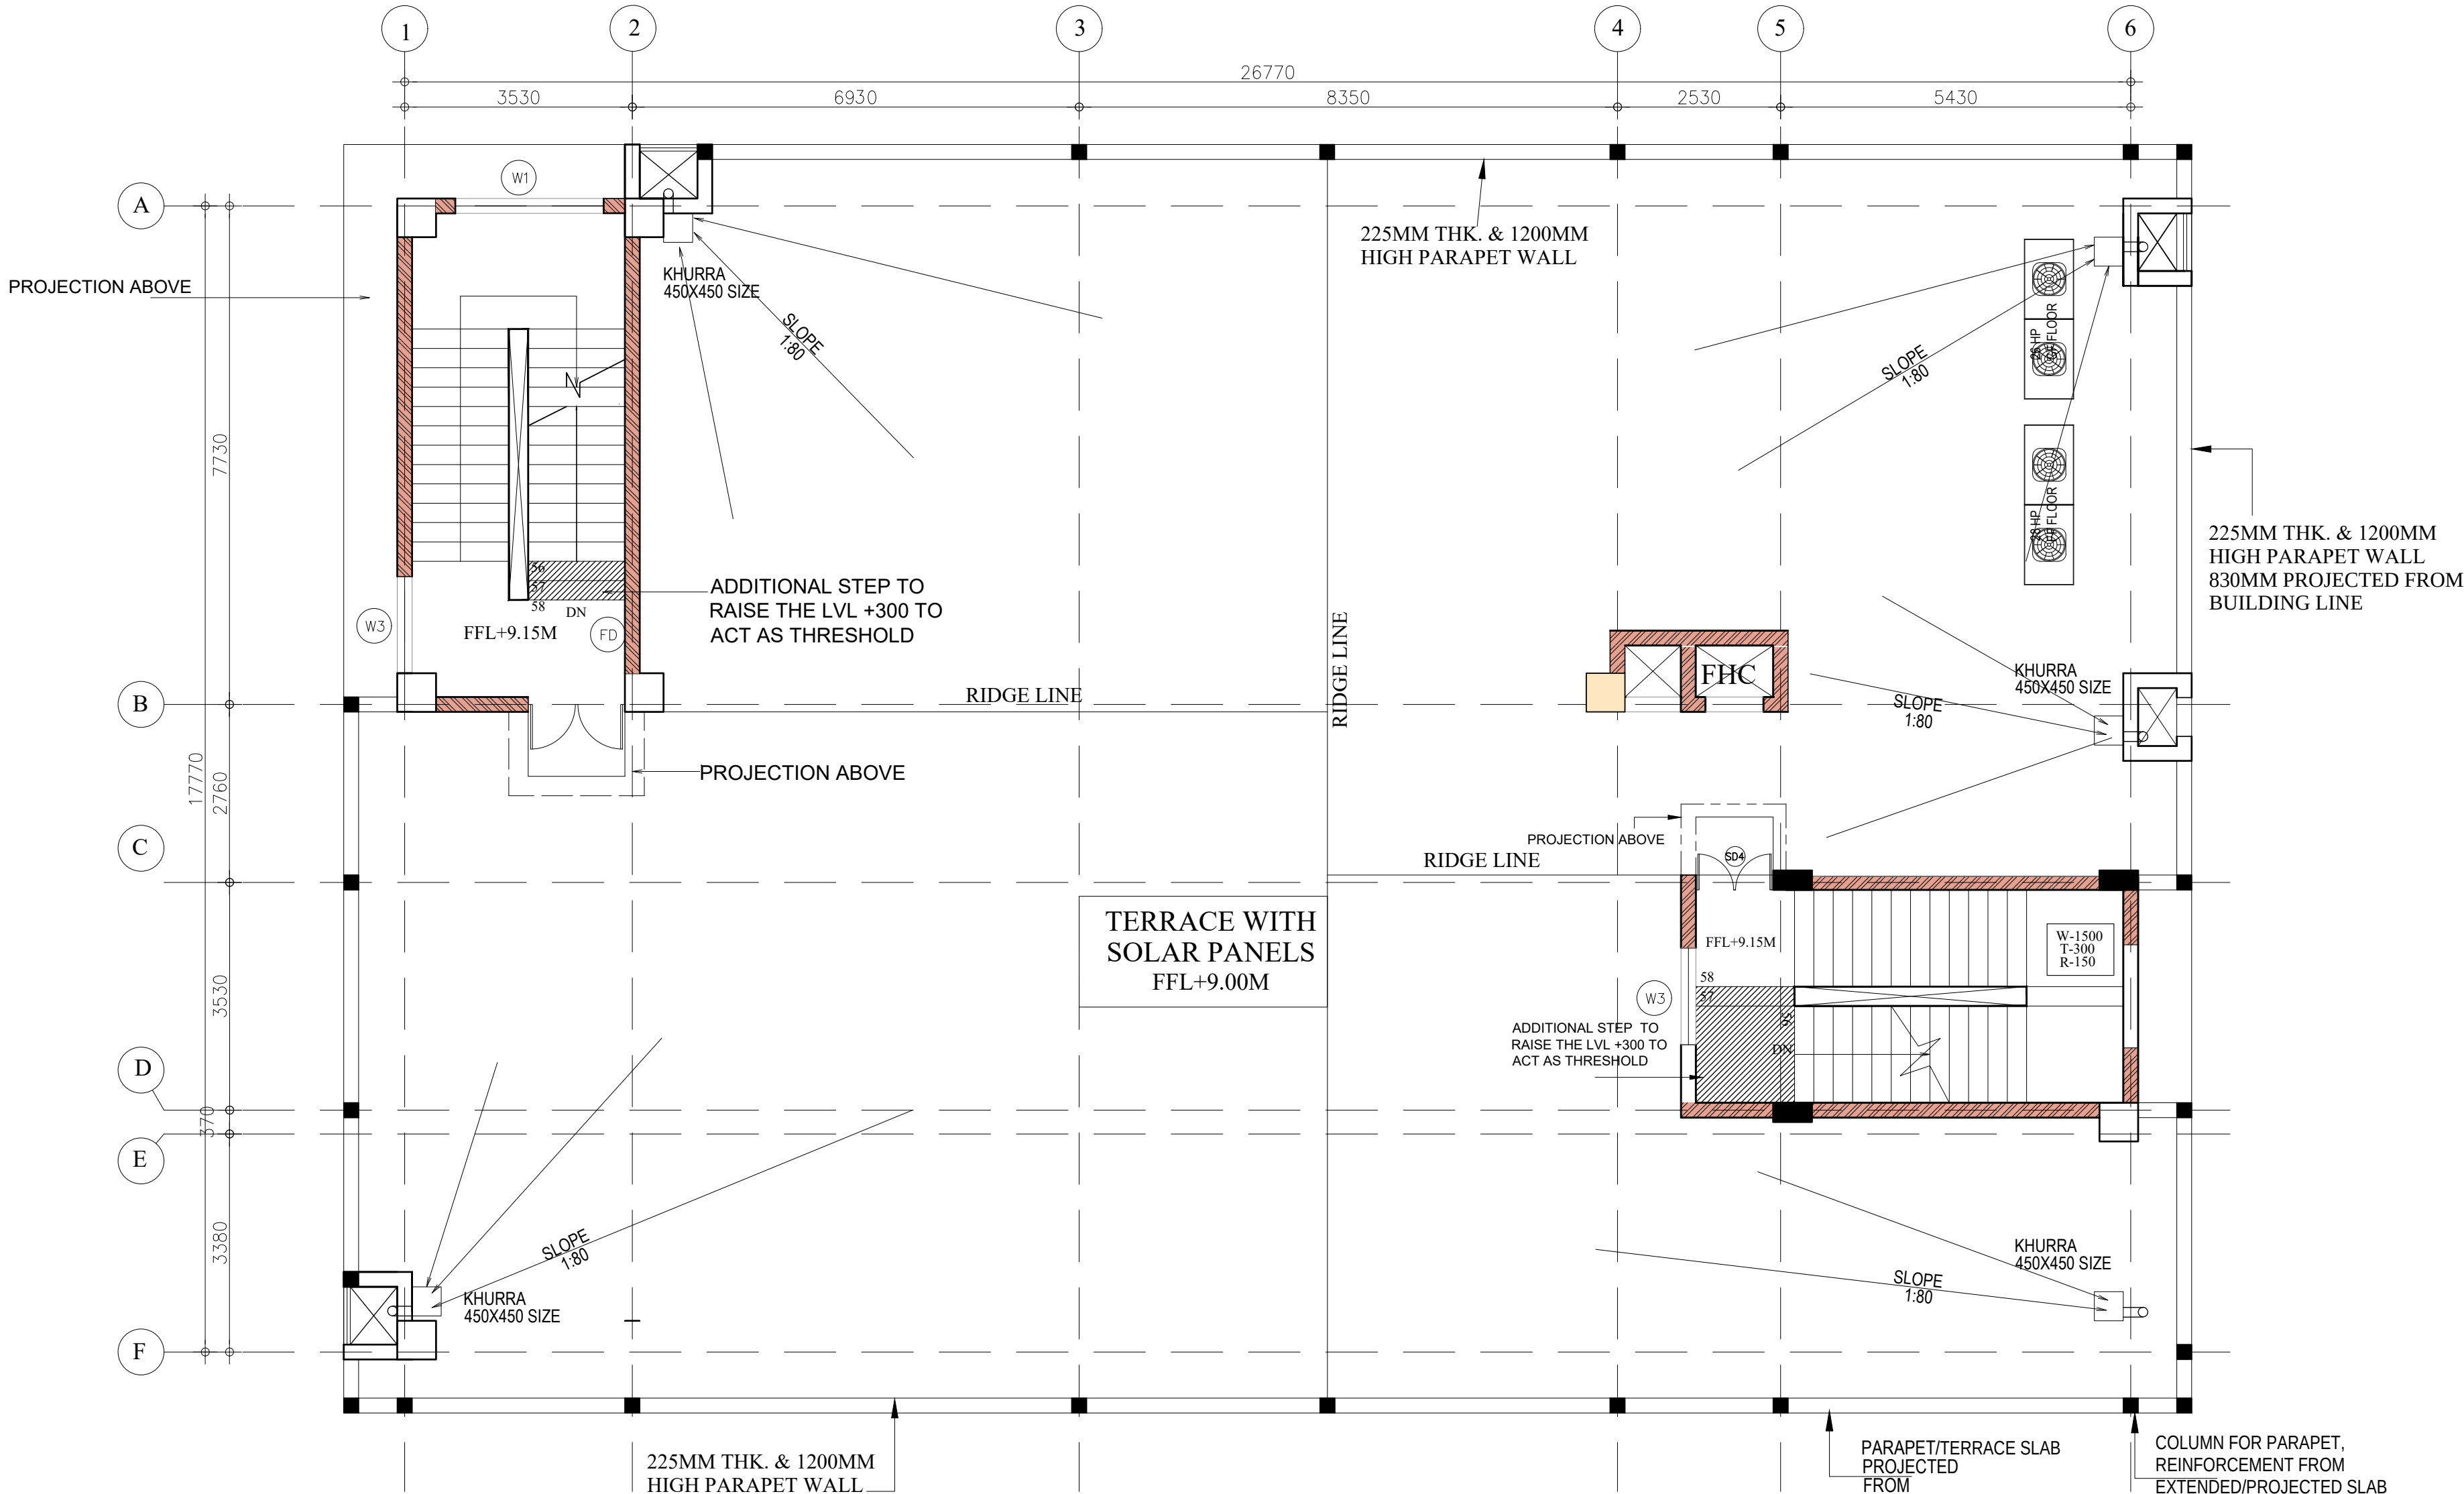

- NOTES
- ALL DIMENSIONS ARE IN MM, UNLESS NOTED OTHERWISE.
 - WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
 - ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
 - THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.

Sn.No.	Description	Area (Sqm)
01	Ground Floor Area	490 sqm
02	First Floor Area	490 sqm
03	Mumty Area	55 sqm

TENDER DRAWING

CLIENT
OIL INDIA LIMITED
(A Govt. of India Enterprise)

CONSULTANT
IRITES
THE INFRASTRUCTURE PEOPLE
(A Govt. of India Enterprise)

PROJECT
BQ WORKMEN HOUSING

BUILDING
COMMUNITY CENTRE (G+1)

DRAWING TITLE
TERRACE FLOOR PLAN

DRG. NO.
BITES/BLD/AR/TD/049


NORTH

SCALE
NTS
DATE
JULY 2025


SCHEDULE OF DOORS - (Ground floor to Terrace floor)							
SL. NO	TYPE	NOS.	WIDTH	HEIGHT (from FFL.)	CILL (from FFL.)	LINTEL (from FFL.)	REMARKS
SCHEDULE OF DOORS							
1.	D	---	750	2100	00	2100	WC AND BATH WPC DOOR PANEL WITH FRAME AS/DRAWING/SPECS
2.	D1	---	900	2100	00	2100	TOILETS WPC DOOR PANEL WITH FRAME AS/DRAWING/SPECS
3.	D2	---	1000	2100	00	2100	ROOMS SINGLE LEAF TEAK WOOD FRAME, FLUSH DOOR AS/DRAWING/SPECS
4.	D4	---	1500	2100	00	2100	PASSAGE DOUBLE LEAF TEAK WOOD FRAME, FLUSH DOOR AS/DRAWING/SPECS
5.	D5	---	1050	2100	00	2100	PWD TOILET WPC DOOR PANEL WITH FRAME AS/DRAWING/SPECS
6.	GDW	---	2300	2400	00	2400	MAIN ENTRY DOUBLE-LEAF GLASS DOOR WITH FRAME LESS FIXED GLAZING AS/DRAWING/SPECS
7.	GDW1	---	4500	2400	00	2400	COMMON HALL DOUBLE-LEAF GLASS DOOR WITH FRAME LESS FIXED GLAZING AS/DRAWING/SPECS
8.	GDW2	---	1500	2400	00	2400	AS PER DRAWING DOUBLE-LEAF GLASS DOOR WITH FRAME LESS FIXED GLAZING
9.	FD	---	1500	2100	00	2100	STAIRCASE 2HR FIRE RATED METAL FIRE DOOR
10.	RS	---	2630	2400	00	2400	ROLLING SHUTTER AS/DRAWING/SPECS
11.	SD	---	900	2100	100	2100	FHC SHAFT M.S.SINGLE LEAF DOOR WITH GLASS (FHC Shaft Door as per NBC & latest CPWD Guideline)
12.	SD2	---	600	2100	00	2100	LV SHAFT M.S.SINGLE LEAF MS DOOR AS/DRAWING/SPECS
13.	SD4	---	1200	2100	00	2100	MUMTY DOOR M.S.DOUBLE LEAF DOOR AS/DRAWING/SPECS

SCHEDULE OF WINDOWS - (Ground floor to Terrace floor)							
SL. NO	TYPE	NOS.	WIDTH	HEIGHT	SILL (from FFL)	LINTEL (from FFL)	REMARKS
1.	W	---	1500	1200	900	2100	POWDER COATED ALUMINUM FRAMED SLIDING WINDOW - THREE TRACK SYSTEM WITH WIRE MESH AS/DRAWING/SPECS
2.	W1	---	2300	1100	1000	2100	POWDER COATED ALUMINUM FRAMED SLIDING WINDOW - TWO TRACK SYSTEM AS/DRAWING/SPECS
3.	W2	---	2500	1200	900	2100	POWDER COATED ALUMINUM FRAMED SLIDING WINDOW - THREE TRACK SYSTEM WITH WIRE MESH AS/DRAWING/SPECS
4.	W3	---	1500	1200	900	2100	POWDER COATED ALUMINUM FRAMED SLIDING WINDOW - TWO TRACK SYSTEM AS/DRAWING/SPECS
SCHEDULE OF VENTILATORS - (Ground floor to Terrace floor)							
SL. NO	TYPE	NOS.	WIDTH	HEIGHT	SILL (from FFL)	LINTEL (from FFL)	REMARKS
1.	V	---	1800	600	2100	2700	POWDER-COATED ALUMINUM FRAME VENTILATOR WITH FIXED FROSTED GLASS PANELS AND INTEGRATED EXHAUST FAN AS/DRAWING/SPECS
2.	V1	---	750	875	1225	2100	POWDER-COATED ALUMINUM FRAME VENTILATOR WITH FIXED FROSTED GLASS PANELS AND INTEGRATED EXHAUST FAN AS/DRAWING/SPECS

SCHEDULE OF SHAFT JALI - (Ground floor to Terrace floor)						
SL. NO	TYPE	NOS.	WIDTH	HEIGHT	SILL (from FFL)	REMARKS
1.	JL	---	600	2400	+00	BEAM BOTTOM/AS PER SITE ALUMINUM OPENABLE LOUVERED DOOR

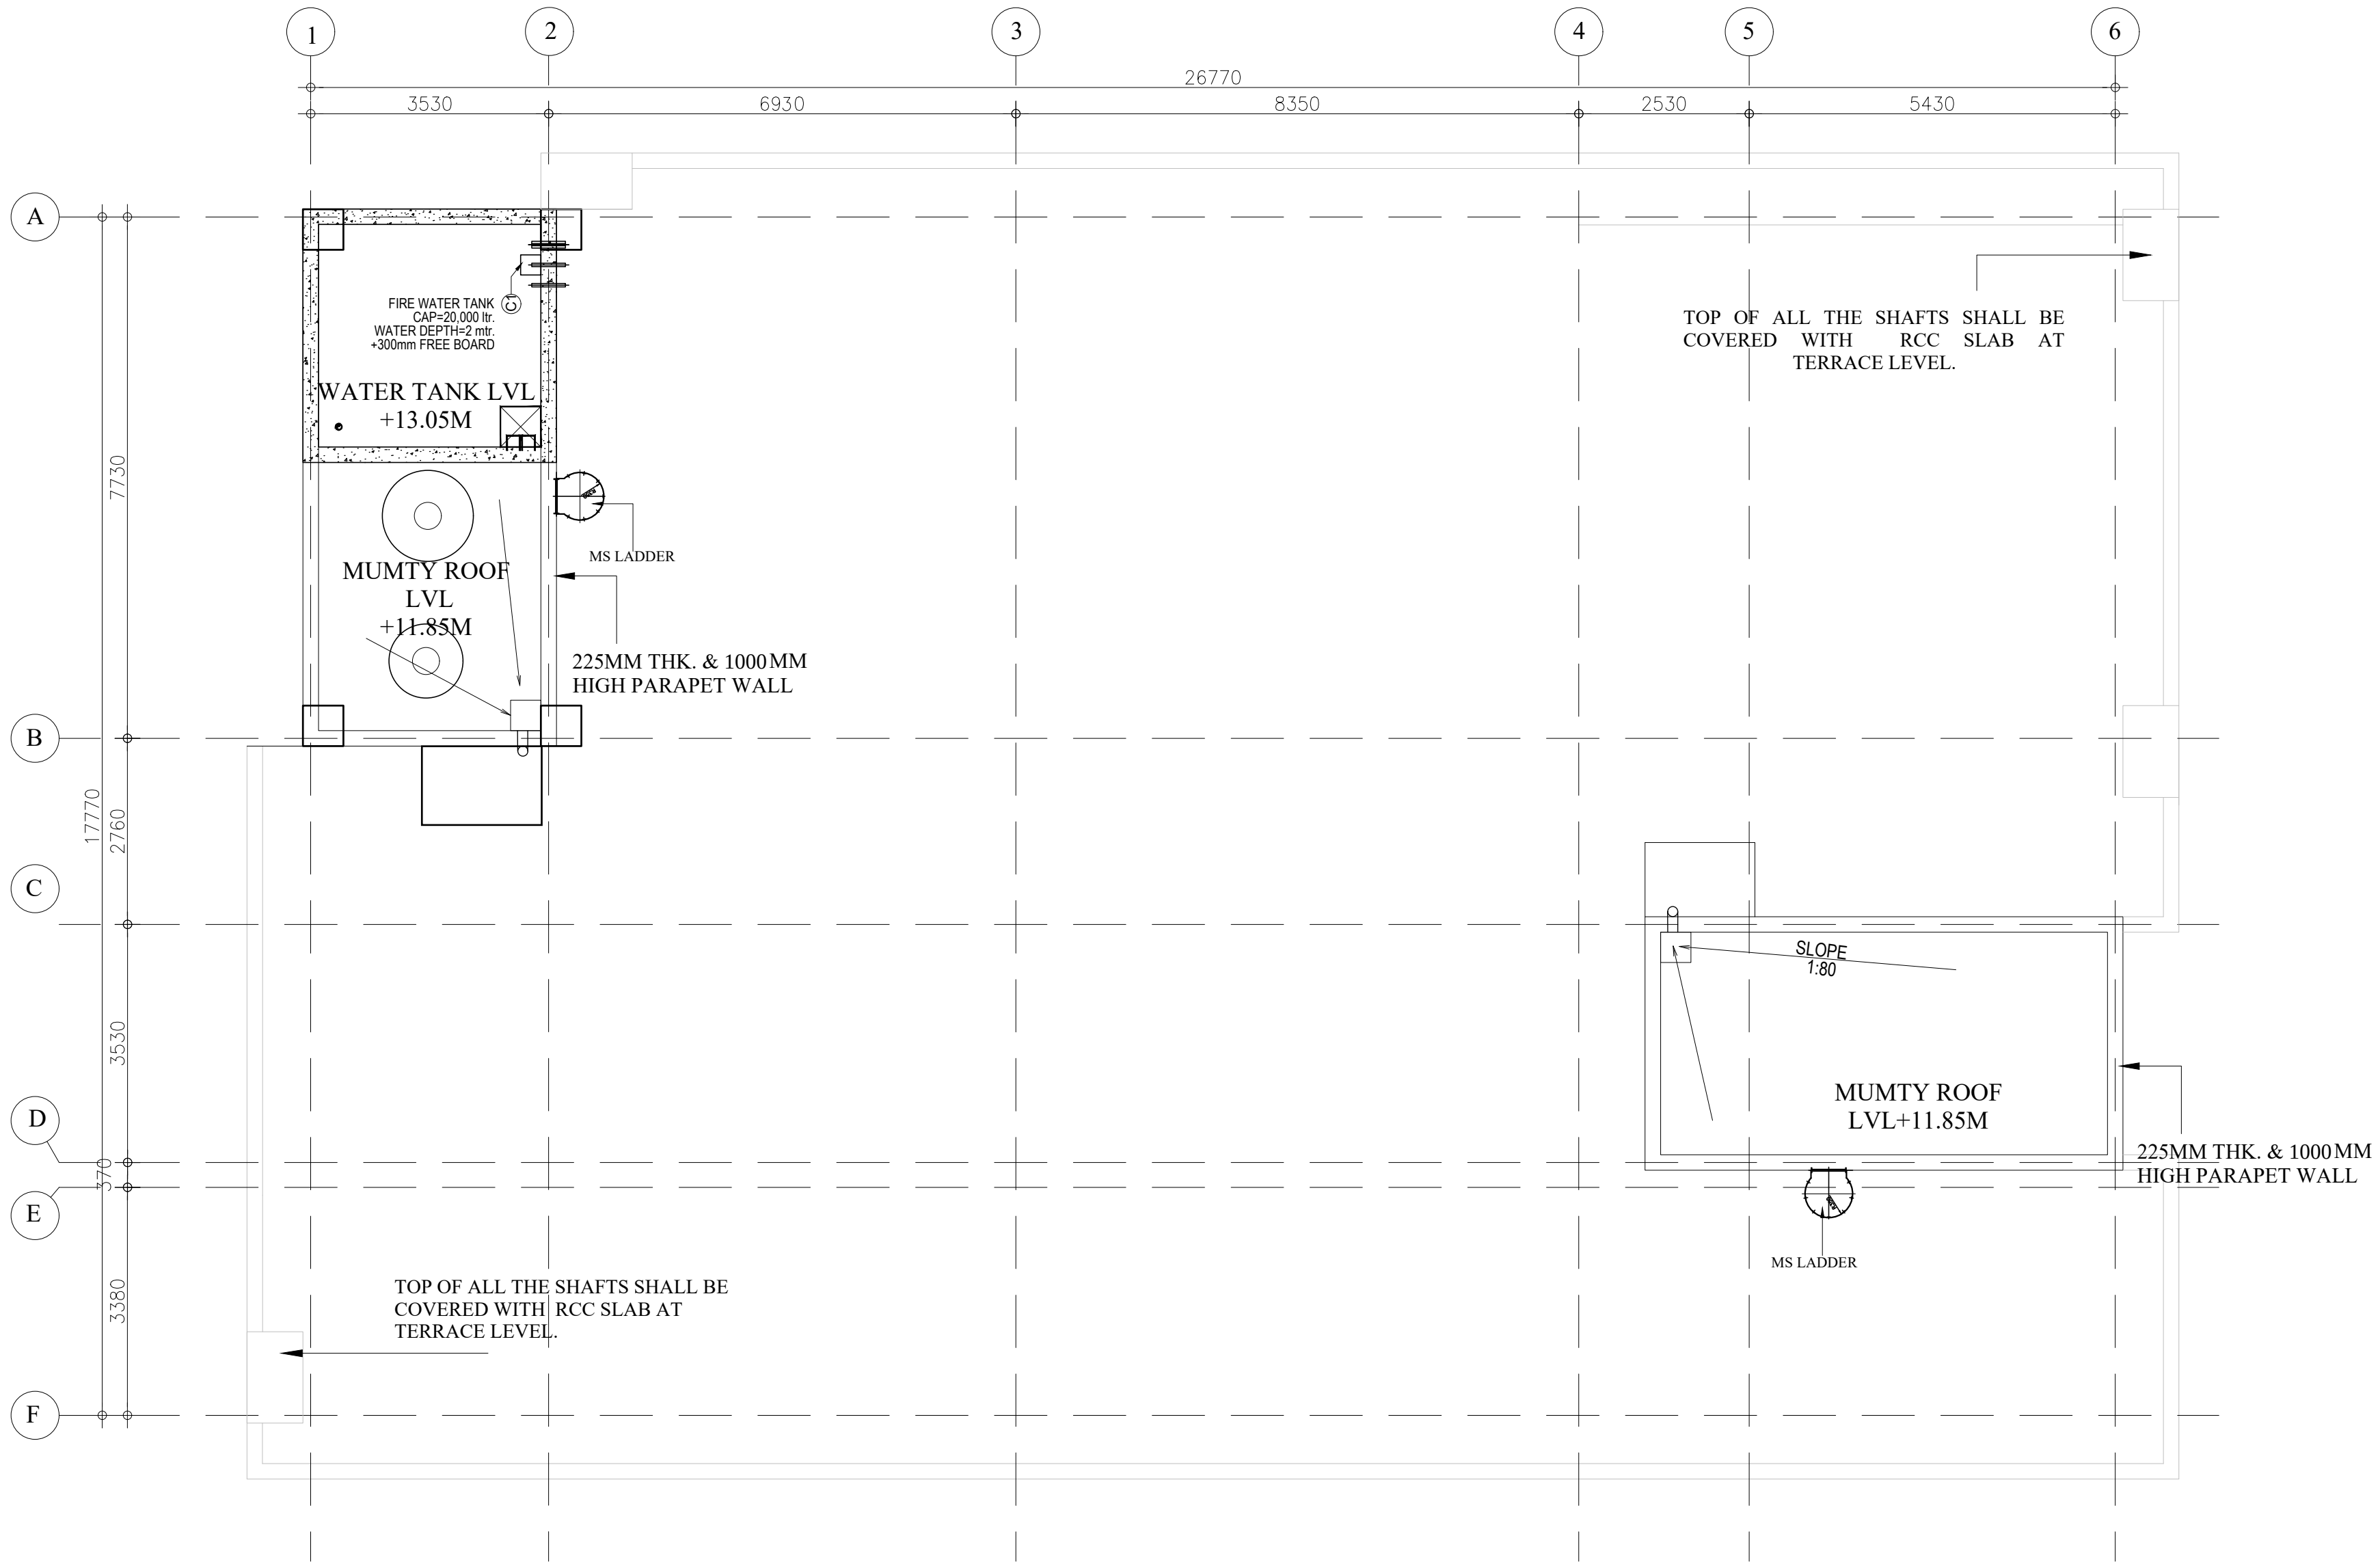

KEY PLAN

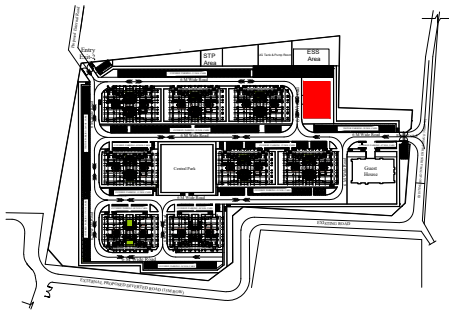



NOTES

1. ALL DIMENSIONS ARE IN MM; UNLESS NOTED OTHERWISE.
2. WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
4. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.


Sn.No.	Description	Area (Sqm)
01	Ground Floor Area	490 sqm
02	First Floor Area	490 sqm
03	Mumty Area	55 sqm

TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	COMMUNITY CENTRE (G+1)	
DRAWING TITLE	MUMTY LEVEL PLAN	
DRG. NO.	MITES/BLD/AR/TD/050	
NORTH	SCALE	DATE
	NTS	JULY 2025

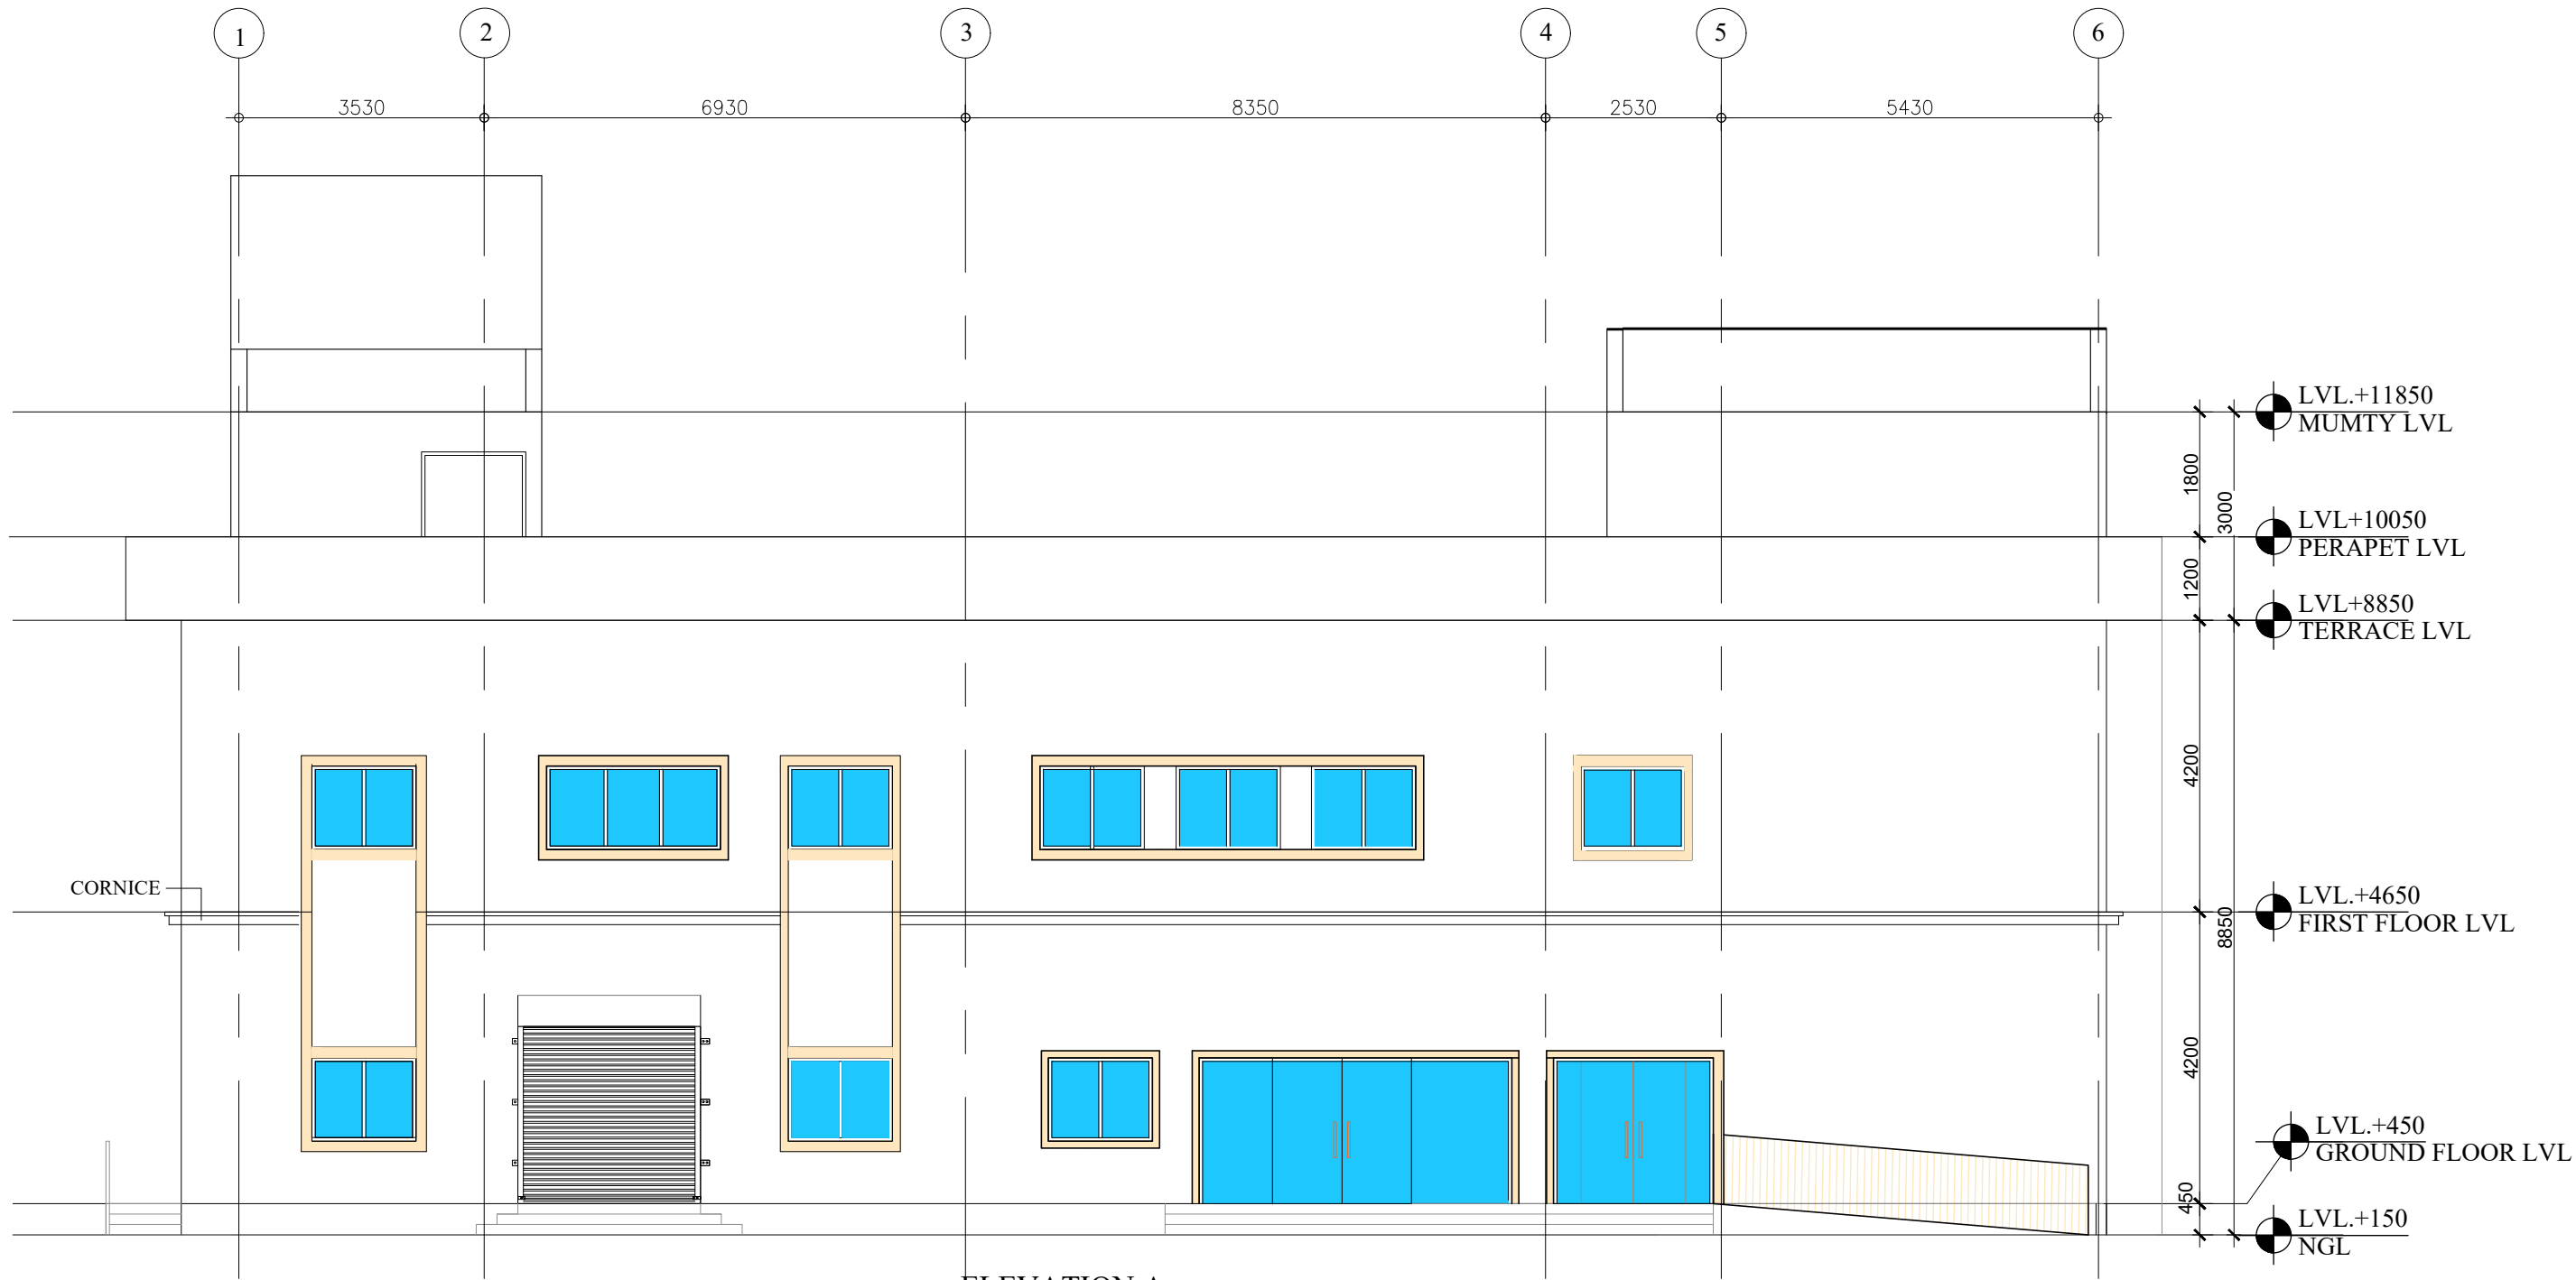


ELEVATION A

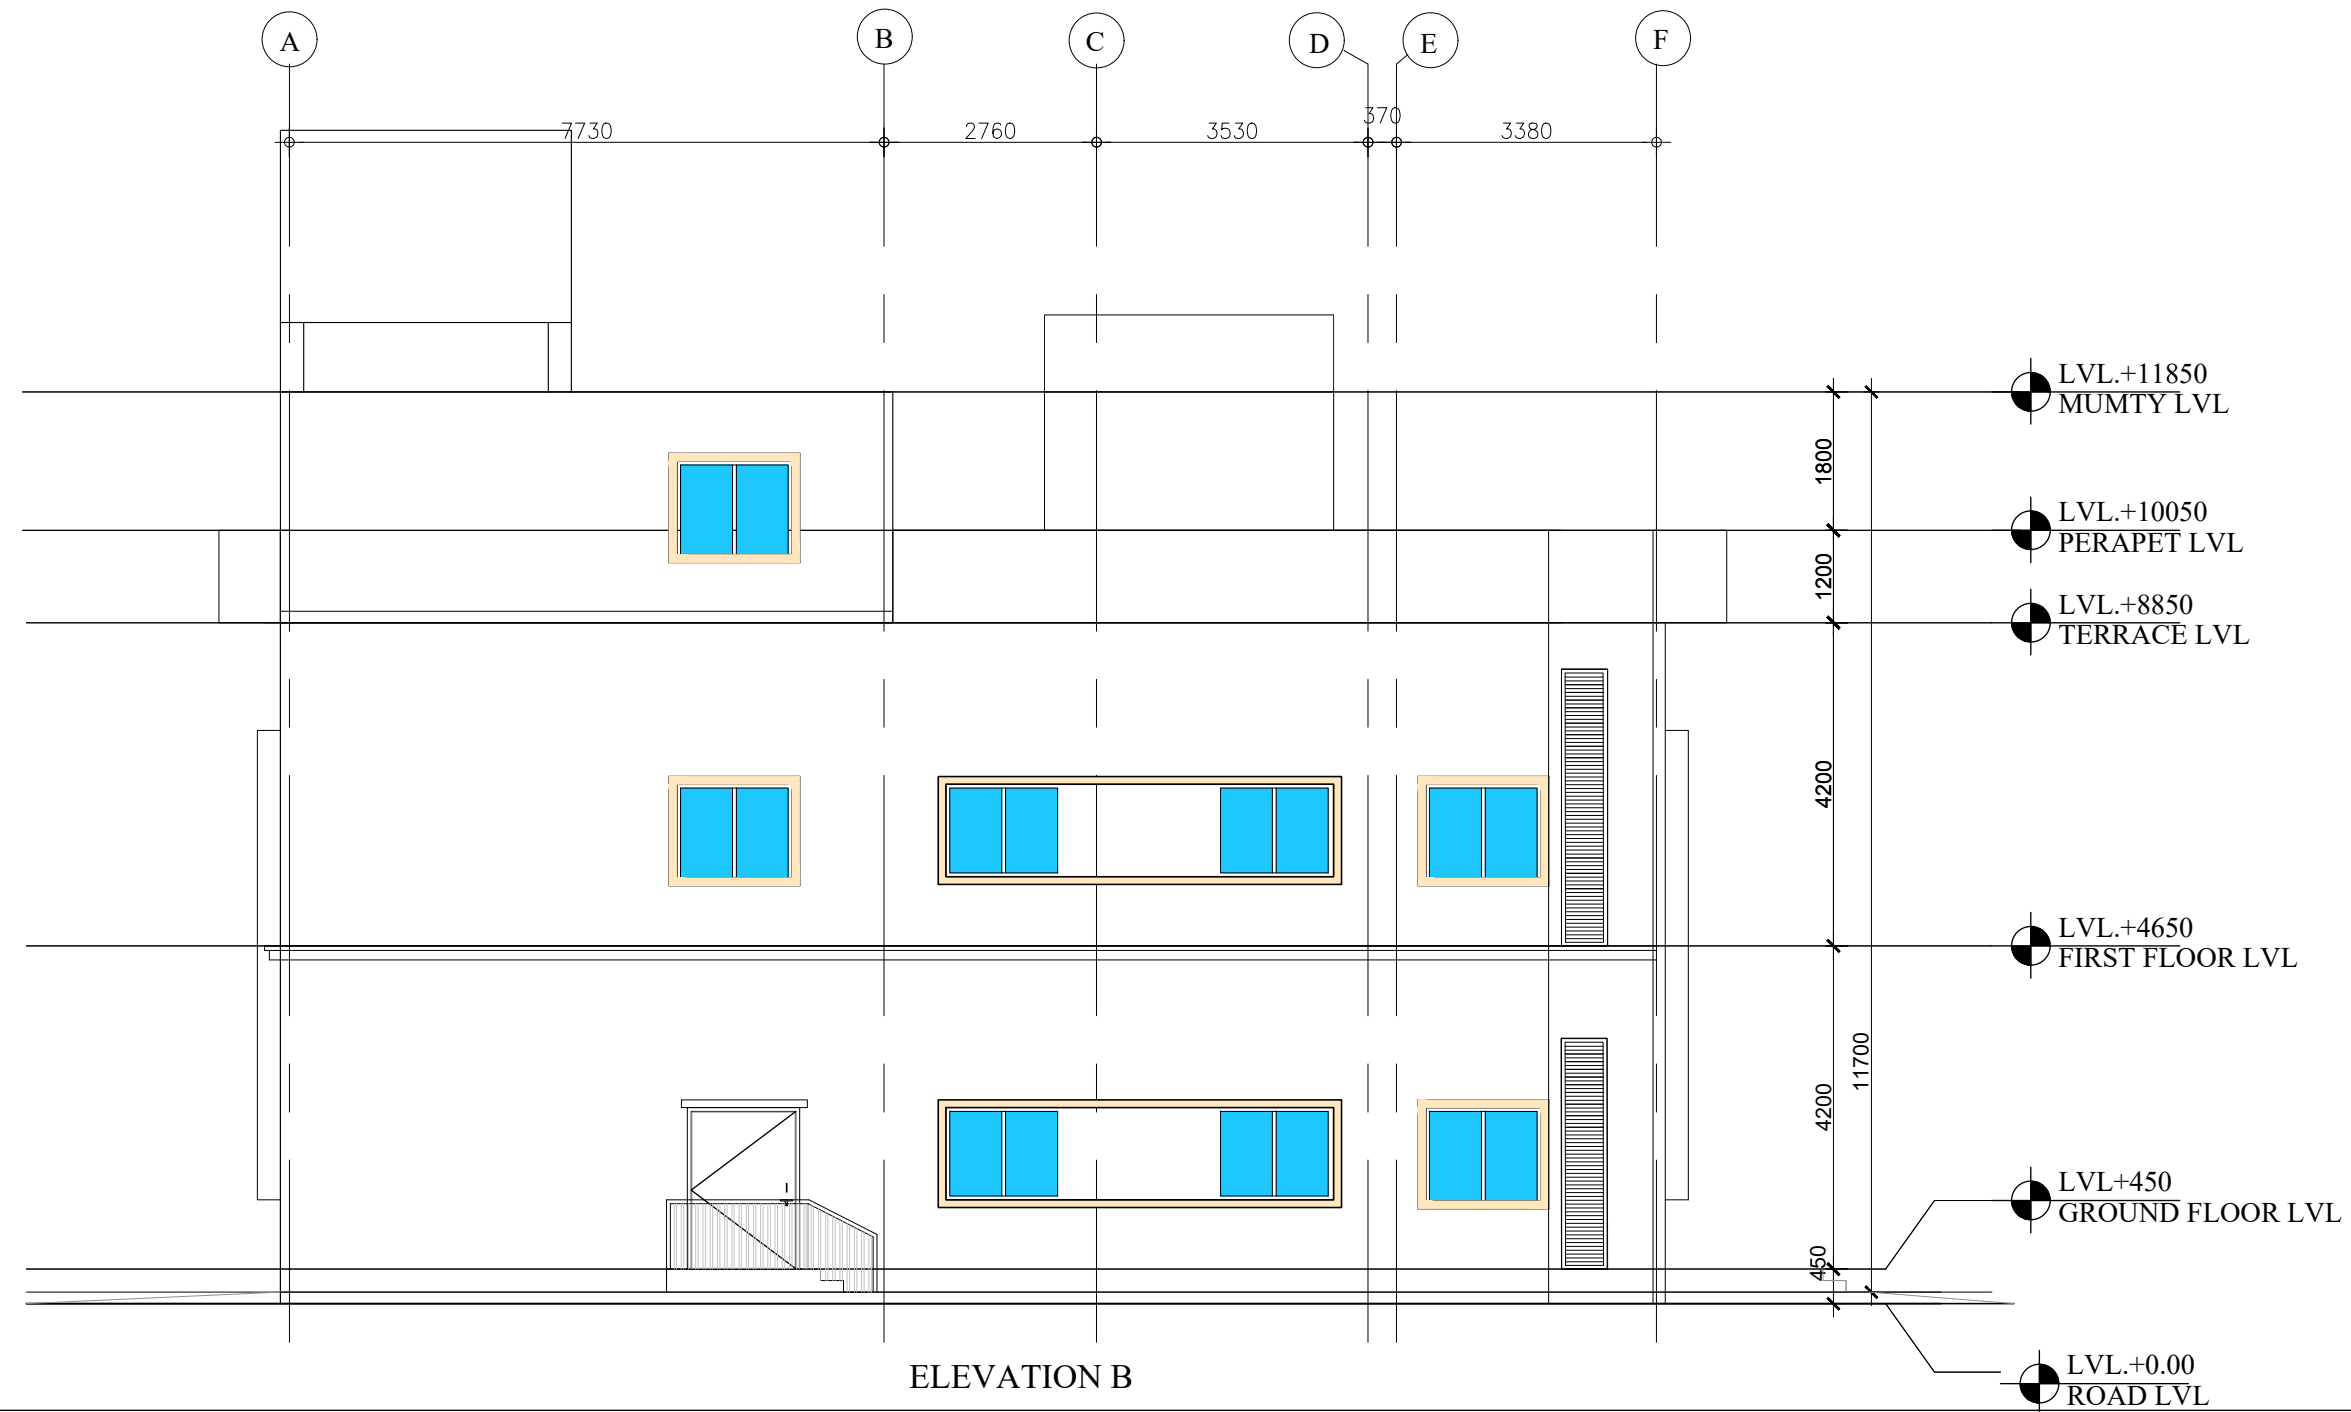

ELEVATION B

KEY PLAN

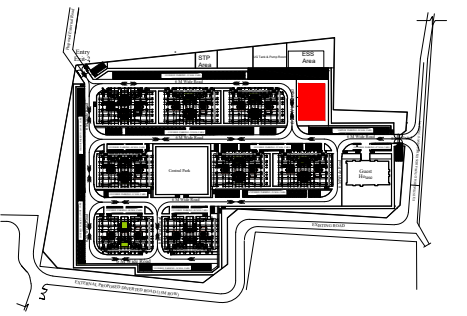

NOTES

1. ALL DIMENSIONS ARE IN MM, UNLESS NOTED OTHERWISE.
2. WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
4. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.

TENDER DRAWING

CLIENT  **OIL INDIA LIMITED**
(A Govt. of India Enterprise)

CONSULTANT  **RITES**
THE INFRASTRUCTURE PEOPLE
(A Govt. of India Enterprise)




PROJECT **BQ WORKMEN HOUSING**

BUILDING **COMMUNITY CENTRE (G+1)**


DRAWING TITLE **ELEVATION**

DRG. NO. **MITES/BLD/AR/TD/051**

NORTH 	SCALE NTS	DATE JULY 2025
--	---------------------	--------------------------

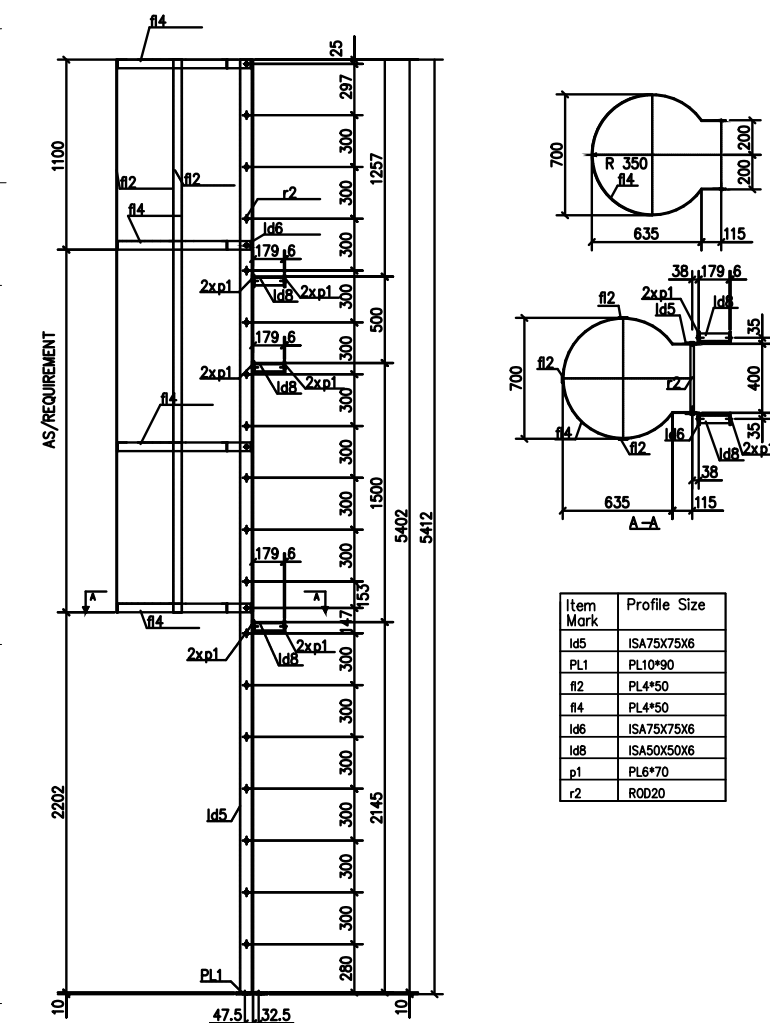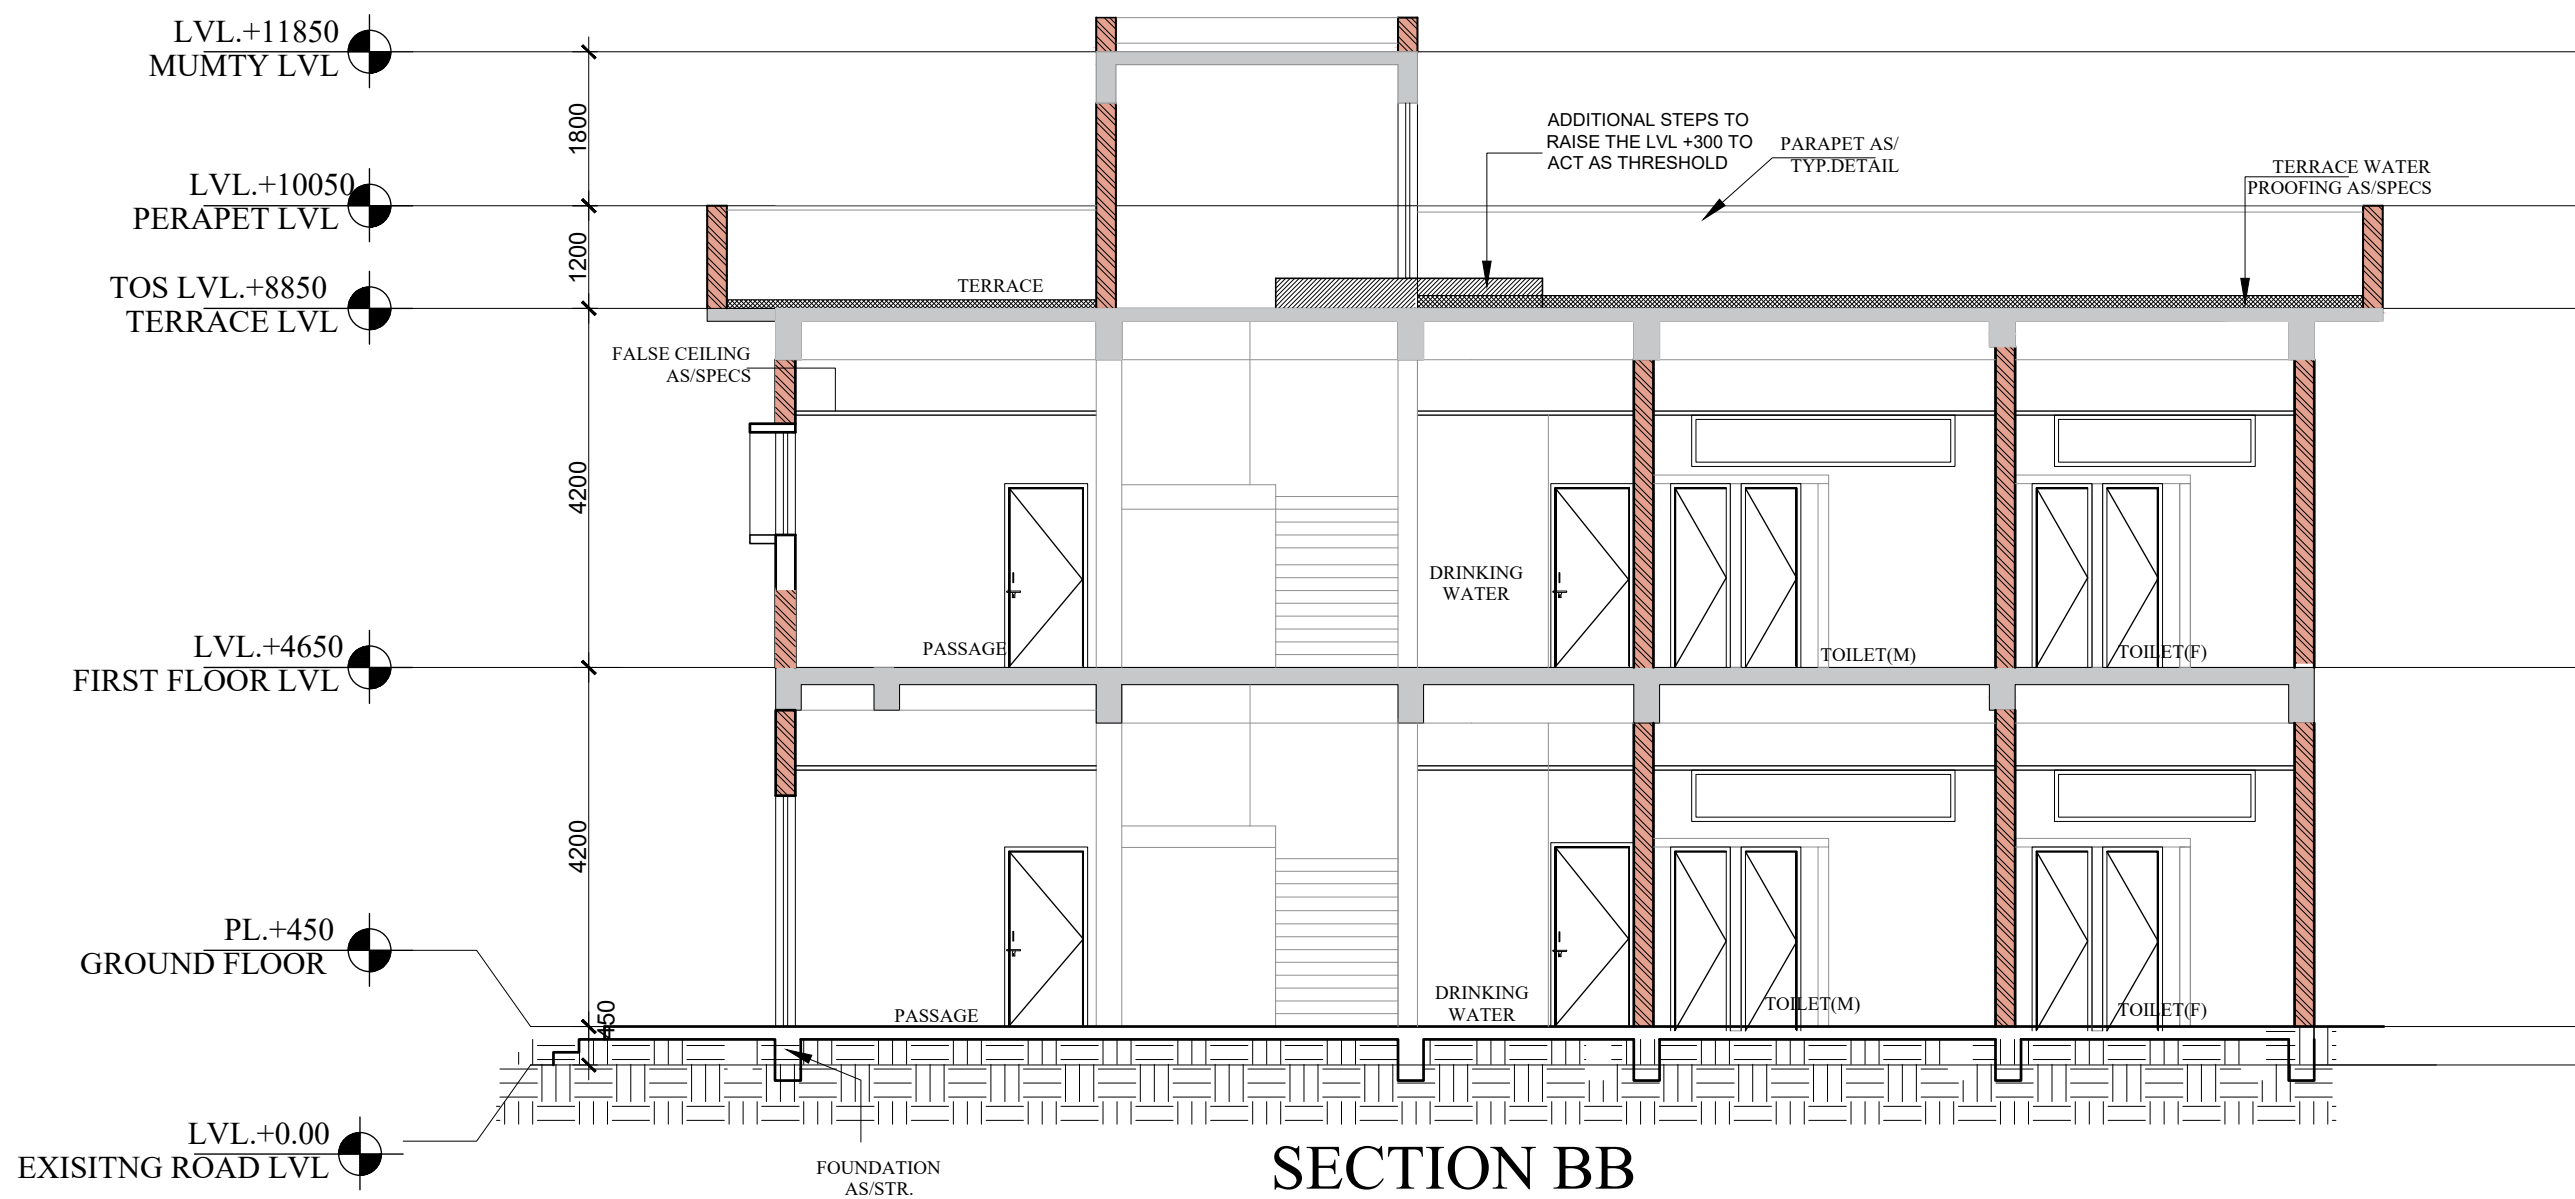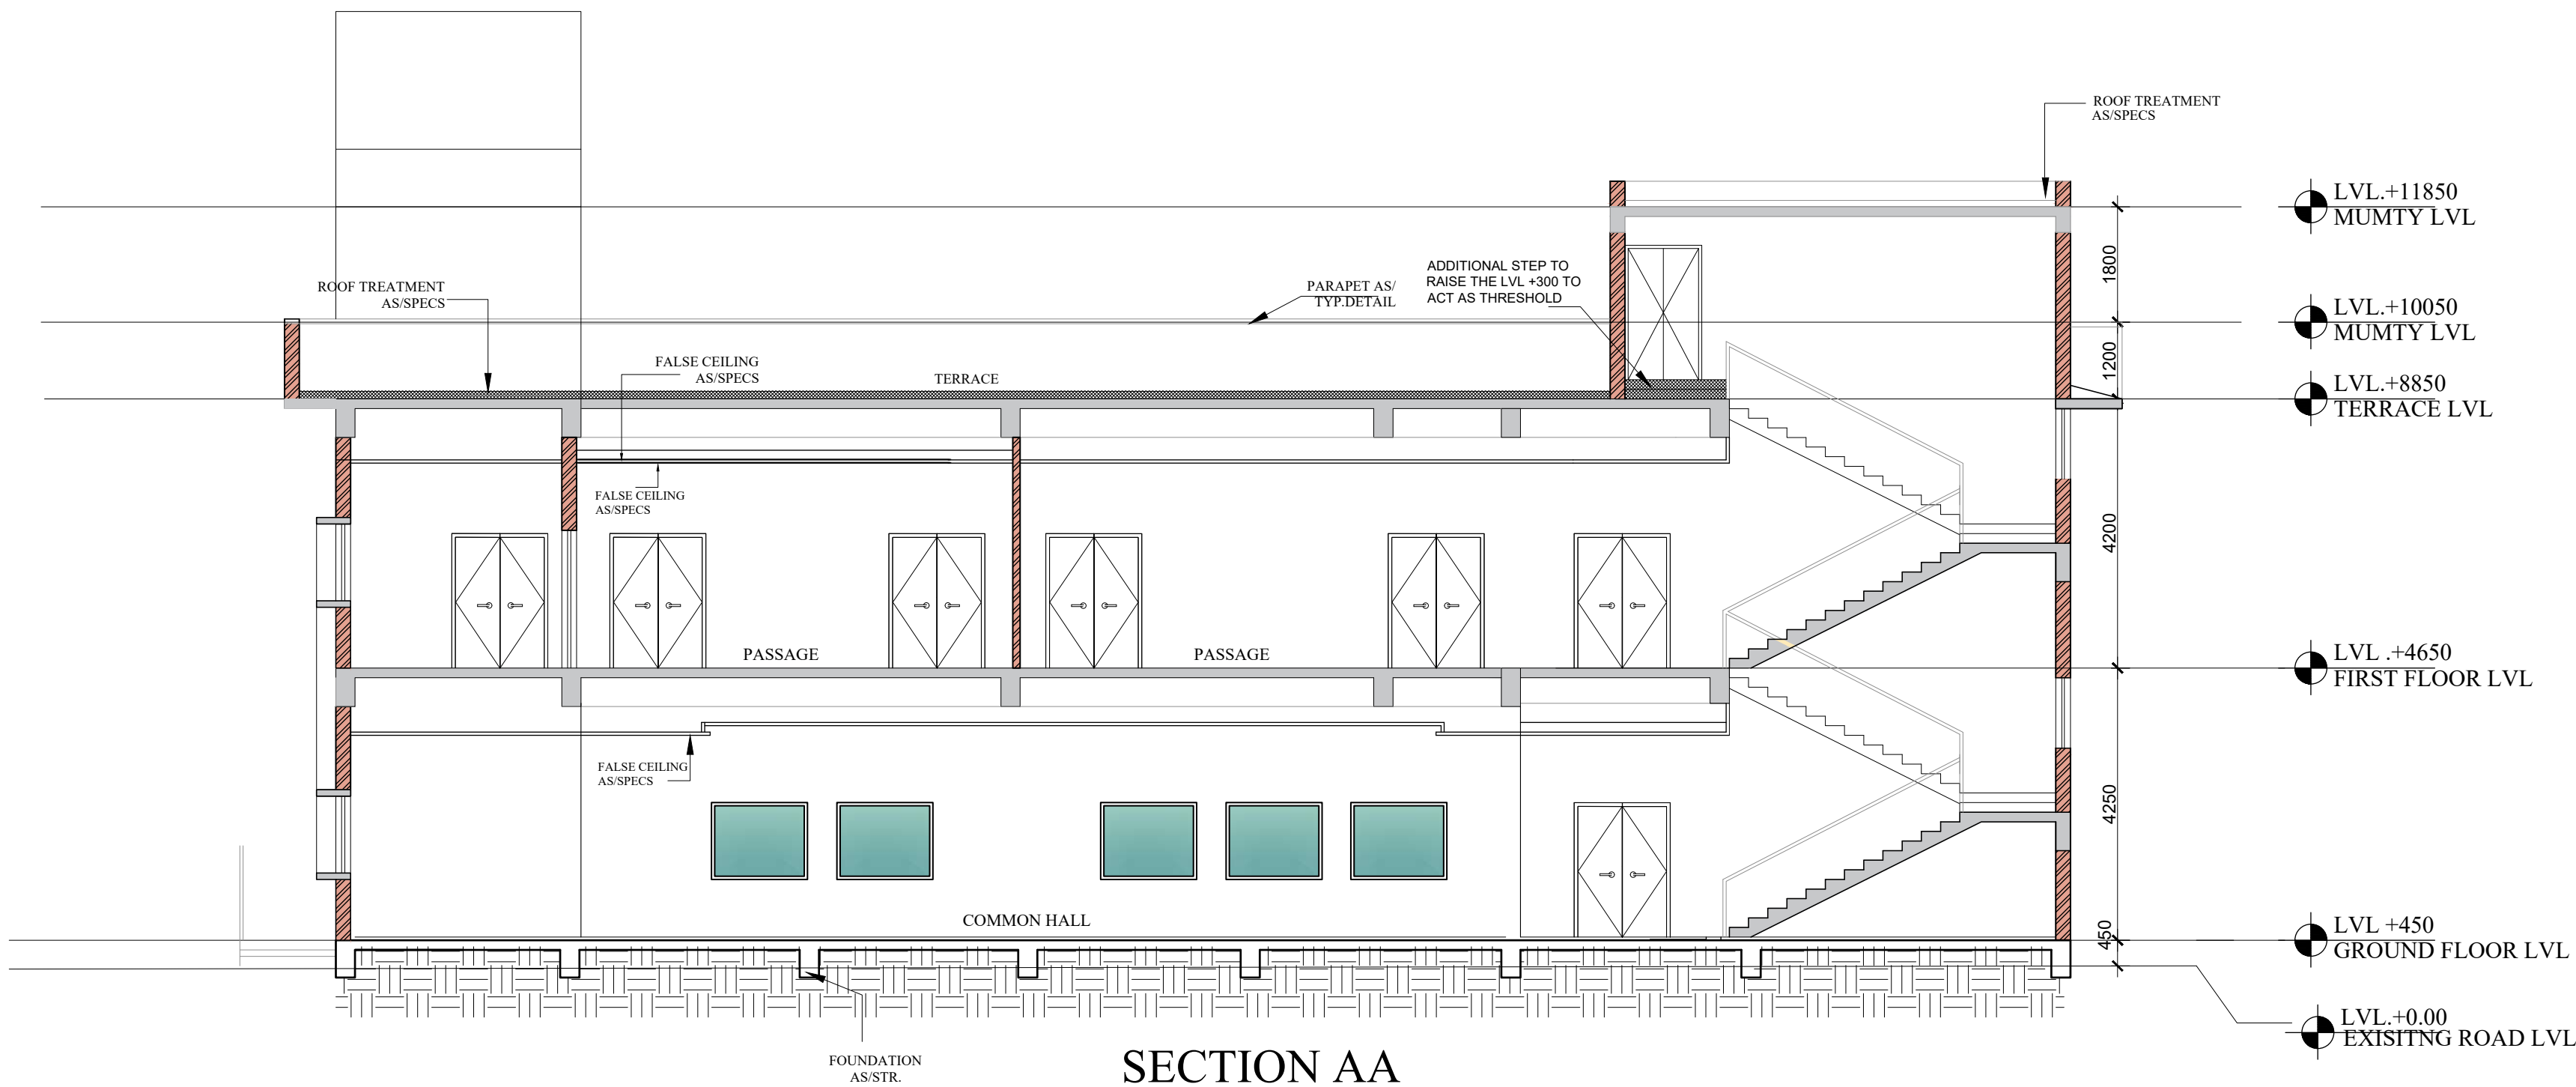

KEY PLAN

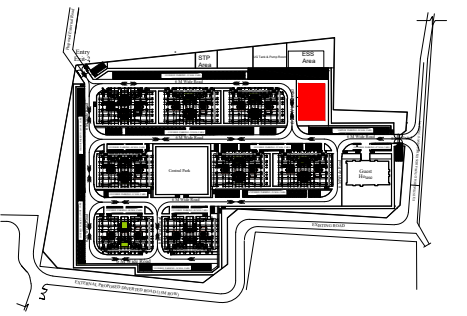

NOTES

1. ALL DIMENSIONS ARE IN MM, UNLESS NOTED OTHERWISE.
2. WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
4. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.
5. THE FINISHED FLOOR LEVEL (FFL) SHALL BE MAINTAINED MINIMUM 50MM OR AS PER APPLICABLE STRUCTURAL SLAB LEVEL OF ALL BUILDINGS. REFER TENDER DOCUMENT FOR DETAILS.

Sn.No.	Description	Area (Sqm)
01	Ground Floor Area	490 sqm
02	First Floor Area	490 sqm
03	Mumty Area	55 sqm

TENDER DRAWING

CLIENT
OIL INDIA LIMITED
(A Govt. of India Enterprise)

CONSULTANT
IRITES
THE INFRASTRUCTURE PEOPLE
(A Govt. of India Enterprise)










PROJECT
BQ WORKMEN HOUSING

BUILDING
COMMUNITY CENTRE (G+1)

DRAWING TITLE
SECTIONS

DRG. NO.
BITES/BLD/AR/TD/052

NORTH 	SCALE NTS	DATE JULY 2025
-----------	---------------------	--------------------------

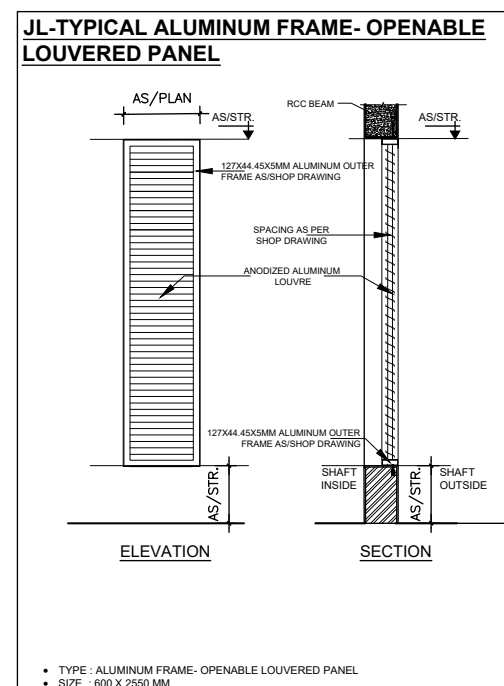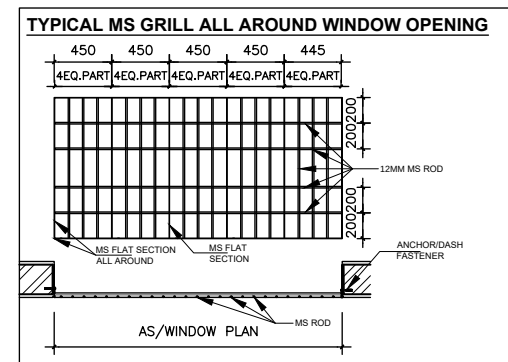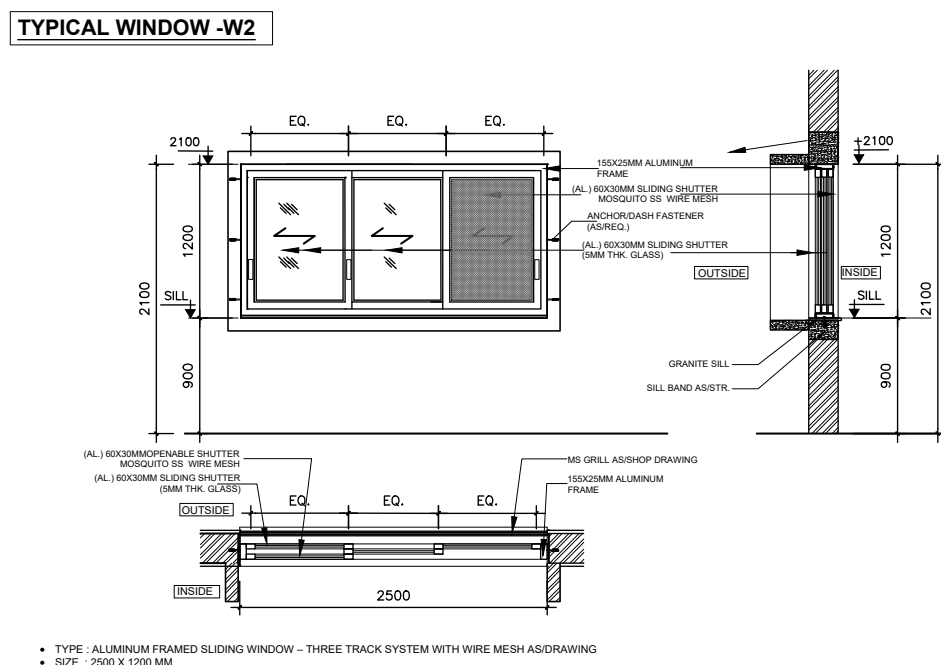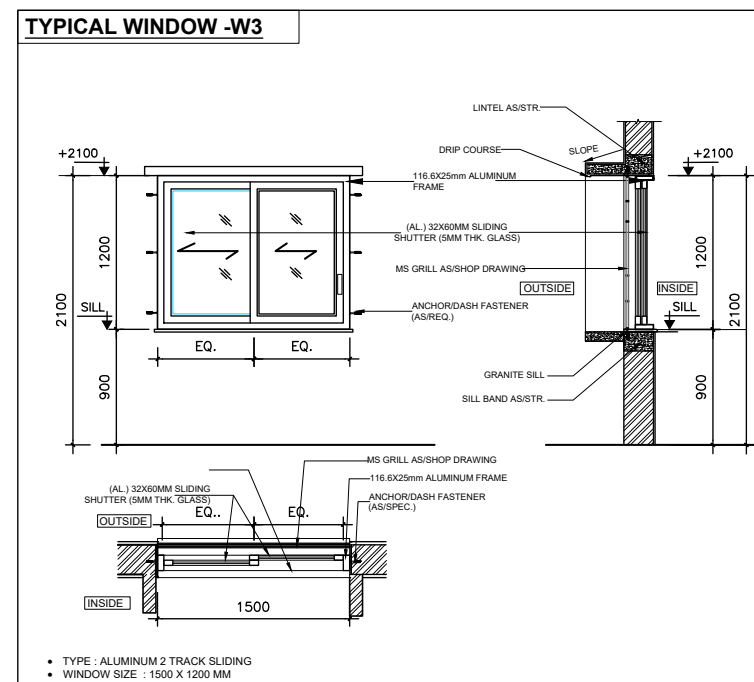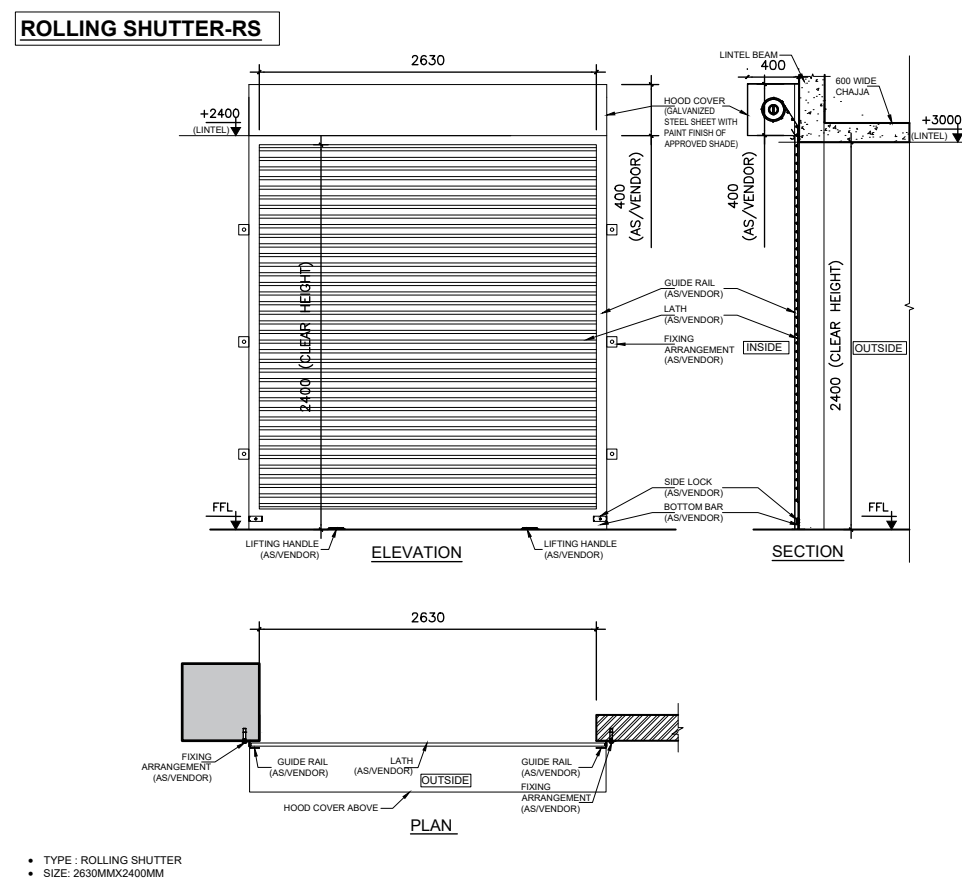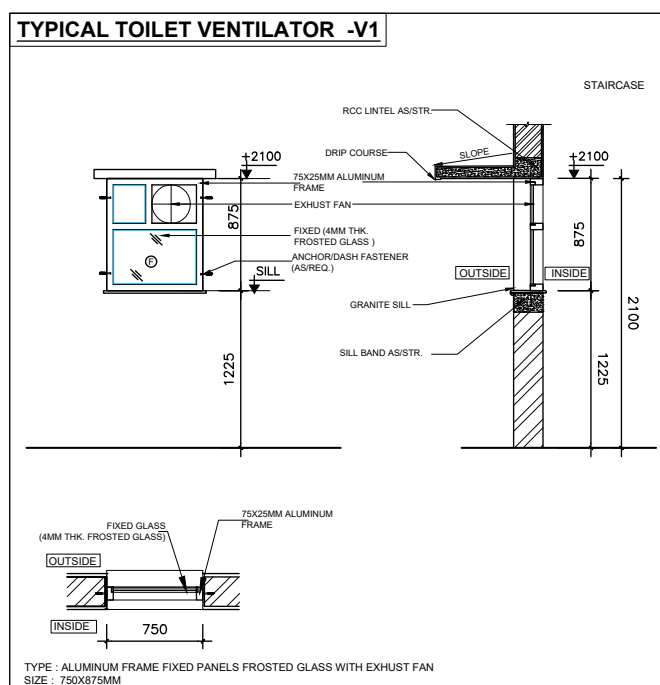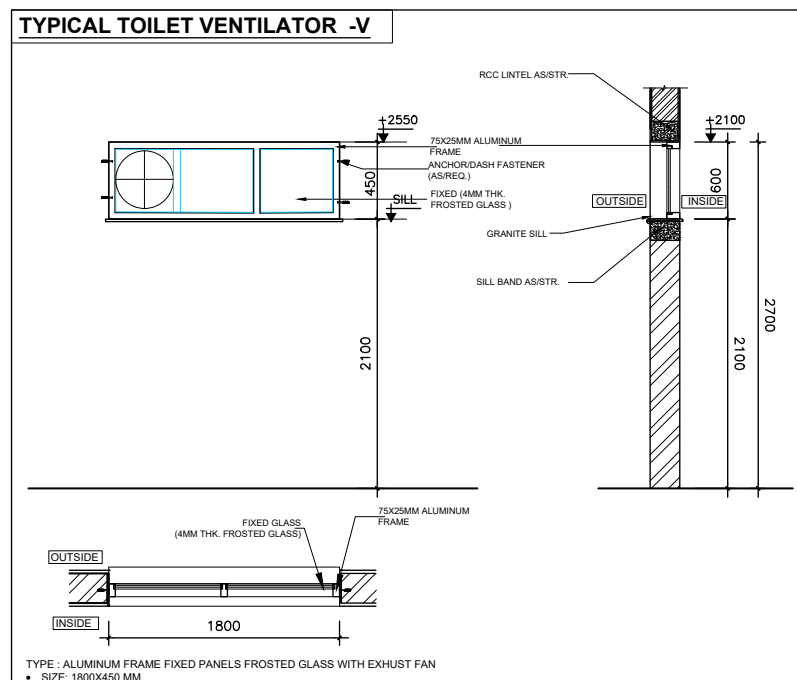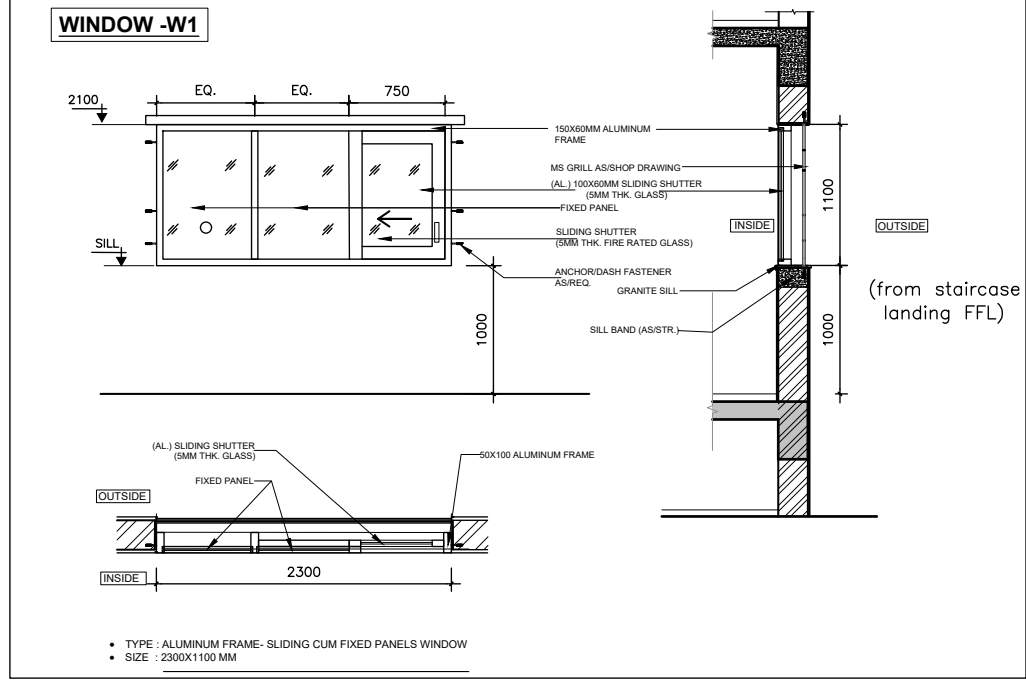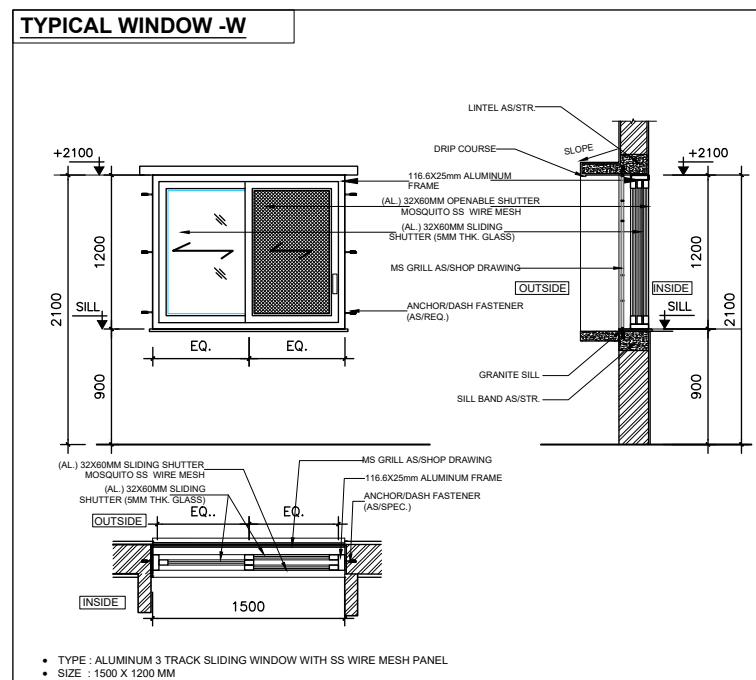

SCHEDULE OF WINDOWS - (Ground floor to Terrace floor)


SL. NO	TYPE	NOS.	WIDTH	HEIGHT	SILL (from FFL)	LINTEL (from FFL)	REMARKS
1.	W	---	1500	1200	900	2100	POWDER COATED ALUMINUM FRAMED SLIDING WINDOW - THREE TRACK SYSTEM WITH WIRE MESH
2.	W1	---	2300	1100	1000	2100	POWDER COATED ALUMINUM FRAMED SLIDING WINDOW - TWO TRACK SYSTEM
3.	W2	---	2500	1200	900	2100	POWDER COATED ALUMINUM FRAMED SLIDING WINDOW - THREE TRACK SYSTEM WITH WIRE MESH
4.	W3	---	1500	1200	900	2100	POWDER COATED ALUMINUM FRAMED SLIDING WINDOW - TWO TRACK SYSTEM

SCHEDULE OF VENTILATORS - (Ground floor to Terrace floor)

SL. NO	TYPE	NOS.	WIDTH	HEIGHT	SILL (from FFL)	LINTEL (from FFL)	REMARKS
1.	V	---	1800	600	2100	2700	POWDER-COATED ALUMINUM FRAME VENTILATOR WITH FIXED FROSTED GLASS PANELS AND INTEGRATED EXHAUST FAN
2.	V1	---	750	875	1225	2100	POWDER-COATED ALUMINUM FRAME VENTILATOR WITH FIXED GLASS PANELS AND INTEGRATED EXHAUST FAN

SCHEDULE OF SHAFT JALI - (Ground floor to Terrace floor)

SL. NO	TYPE	NOS.	WIDTH	HEIGHT	SILL (from FFL)	LINTEL (from FFL)	REMARKS
1.	JL	---	600	2400	+00	BEAM BOTTOM/AS PER SITE	ALUMINUM OPENABLE LOUVERED DOOR

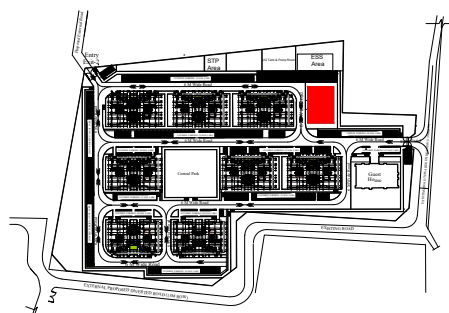

NOTES

1. ALL DIMENSIONS ARE IN MM, UNLESS NOTED OTHERWISE.
2. WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
4. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.
5. THE DRAWING IS INDICATIVE ONLY.
6. SHOP DRAWING TO BE PREPARED FOR APPROVAL.
7. REFER SPECIFICATION AND SCHEDULE OF FINISH.

TENDER DRAWING

CLIENT



CONSULTANT



PROJECT

BQ WORKMEN HOUSING

BUILDING

COMMUNITY CENTRE (G+1)


DRAWING TITLE

DOOR-WINDOW

DRG. NO.	
----------	--

RITES/BLD/AR/TD/053

NORTH




SCALE

NTS

DATE


JULY 2025

DOOR-D

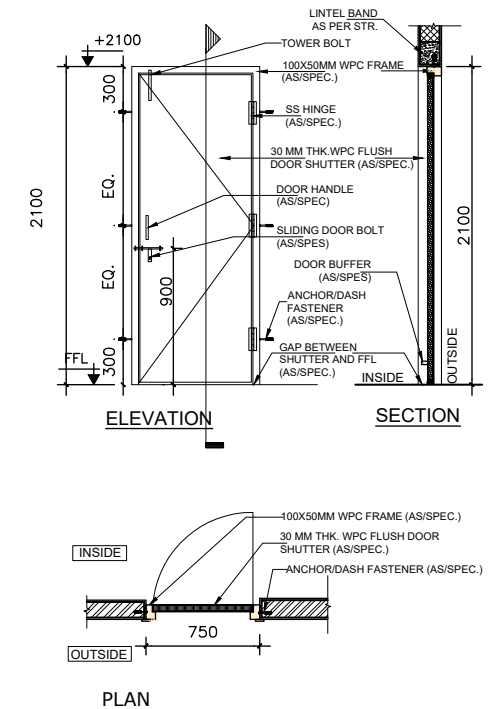


TYPE : WPC FRAME AND WPC FLUSH SHUTTER
SIZE : 750MMX2100MM

DOOR-D1

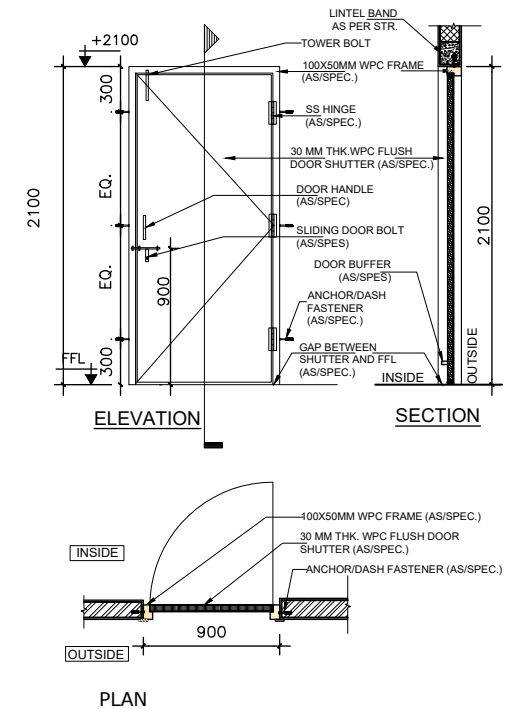


TYPE : WPC FRAME AND WPC FLUSH SHUTTER
SIZE : 900MMX2100MM

DOOR-D2

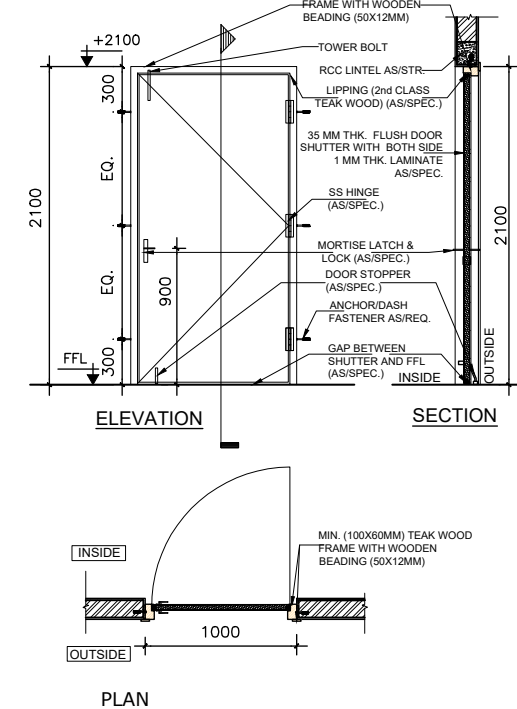


TYPE : SINGLE LEAF TEAK WOOD FRAME, FLUSH DOOR
SIZE : 1000MMX2100MM

DOOR-D3

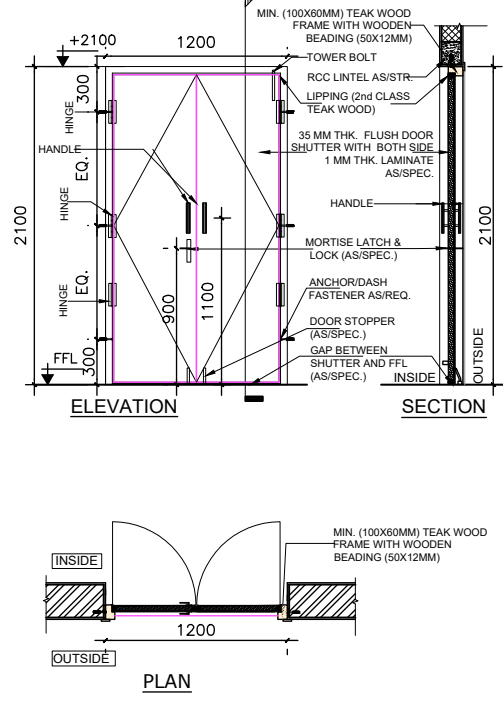


TYPE : TEAK WOOD FRAME DOUBLE LEAF FLUSH DOOR
SIZE : 1200MMX2100MM

DOOR-D4

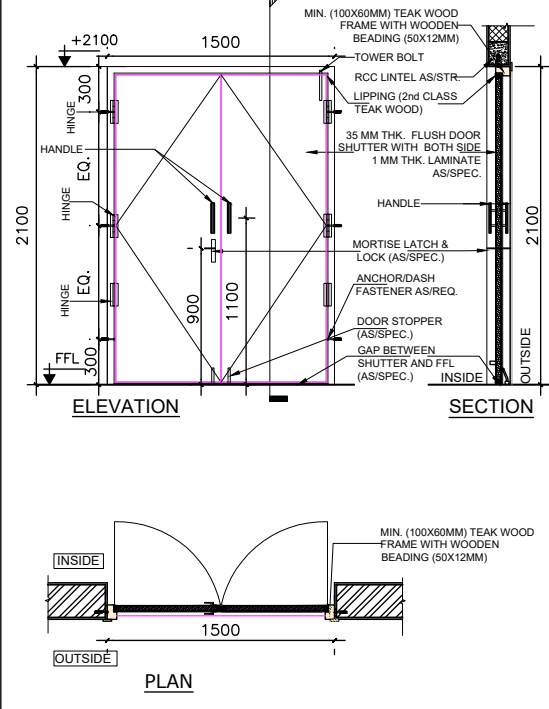


TYPE : TEAK WOOD FRAME DOUBLE LEAF FLUSH DOOR
SIZE : 1500MMX2100MM

DOOR-D5

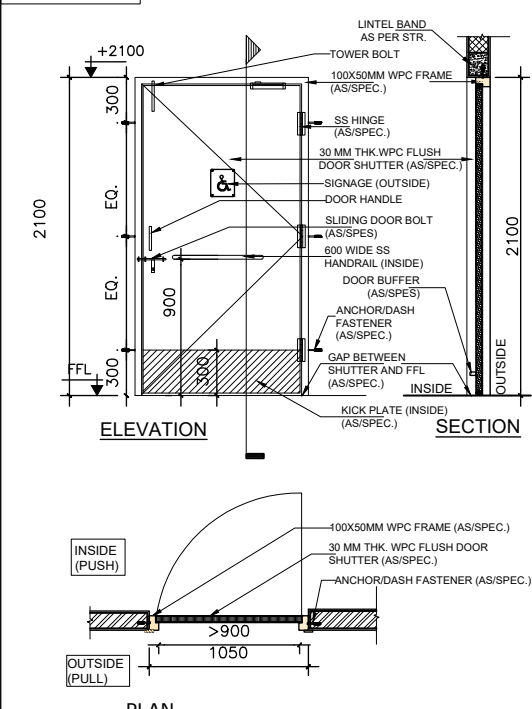

TYPE : WPC FRAME AND WPC FLUSH SHUTTER
SIZE : 1050MMX2100MM


KEY PLAN

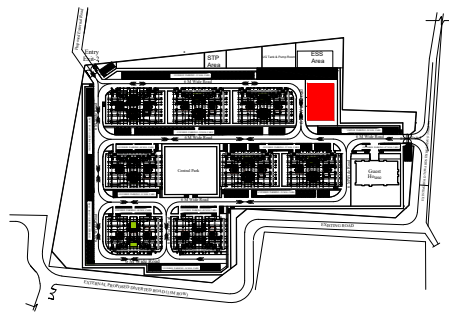

NOTES


1. ALL DIMENSIONS ARE IN MM, UNLESS NOTED OTHERWISE.
2. WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
4. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.
5. THE DRAWING IS INDICATIVE ONLY.
6. SHOP DRAWING TO BE PREPARED FOR APPROVAL.
7. REFER SPECIFICATION AND SCHEDULE OF FINISH.

DOOR-GDW

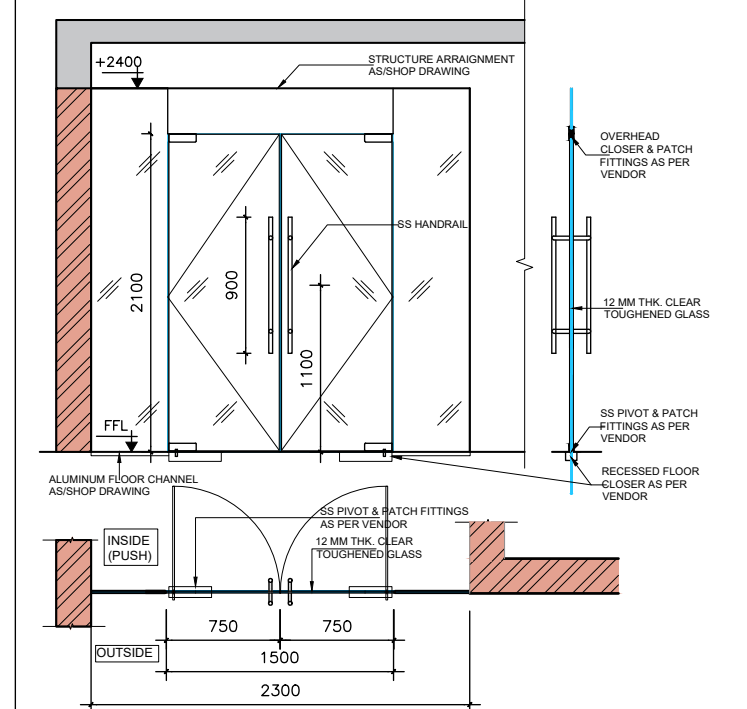


TYPE : PIVOT FRAMELESS GLASS SWING DOOR (PAIR) WITH FRAMELESS FIXED GLAZING
• SIZE: 2300MMX2400MM

DOOR-GDW1

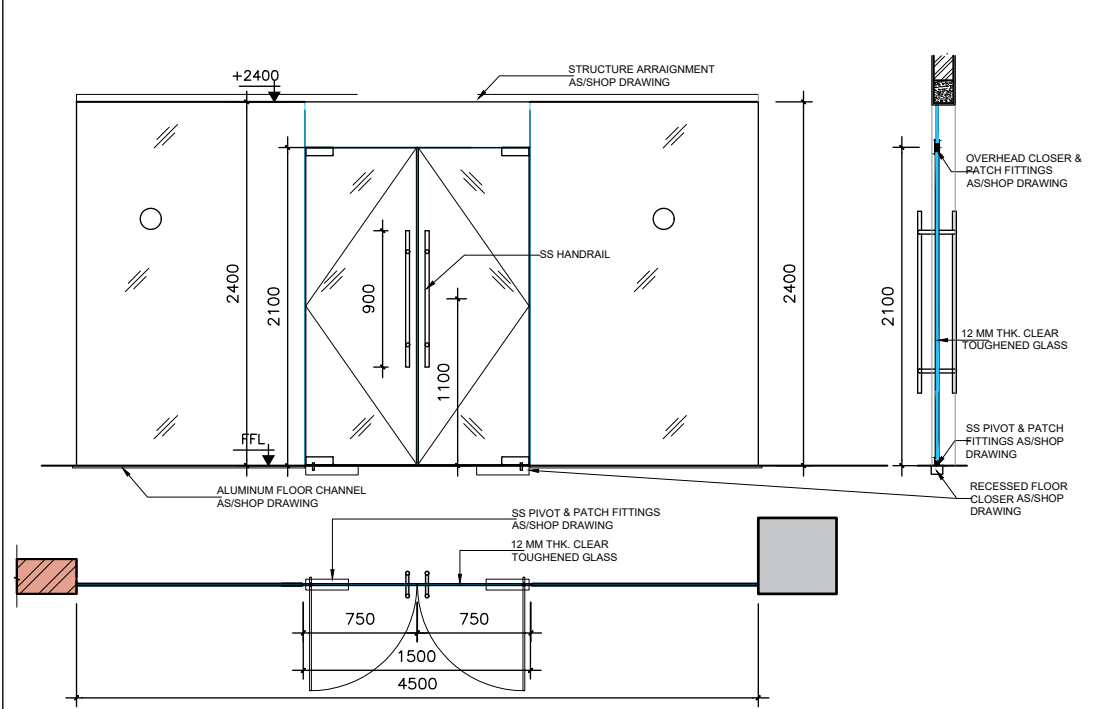


• TYPE : PIVOT FRAMELESS GLASS SWING DOOR (PAIR) WITH FRAMELESS FIXED GLAZING
• SIZE: 4500MMX2400MM (OPENABLE 1500MM)

DOOR-FD

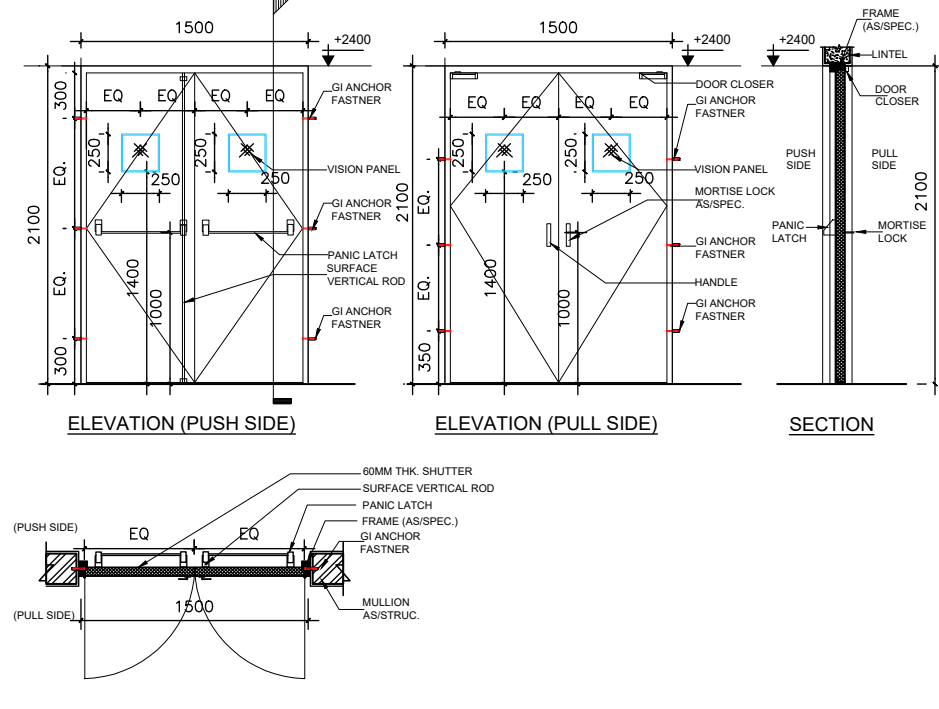


• TYPE : 2 HR FIRE RATED DOOR DOUBLE LEAVES DOOR
• SIZE: 1500MMX2100MM

DOOR-SD2

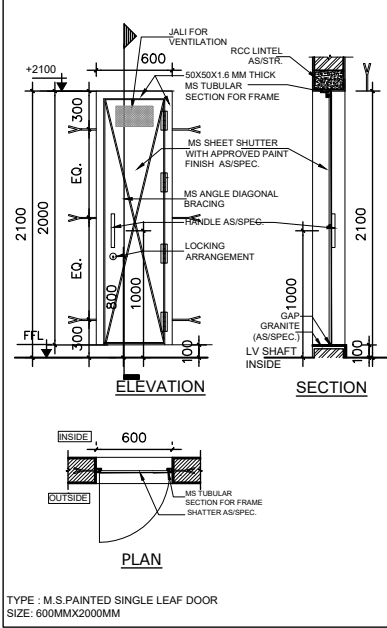


TYPE : M.S PAINTED SINGLE LEAF DOOR
SIZE: 600MMX2000MM

DOOR-GDW2

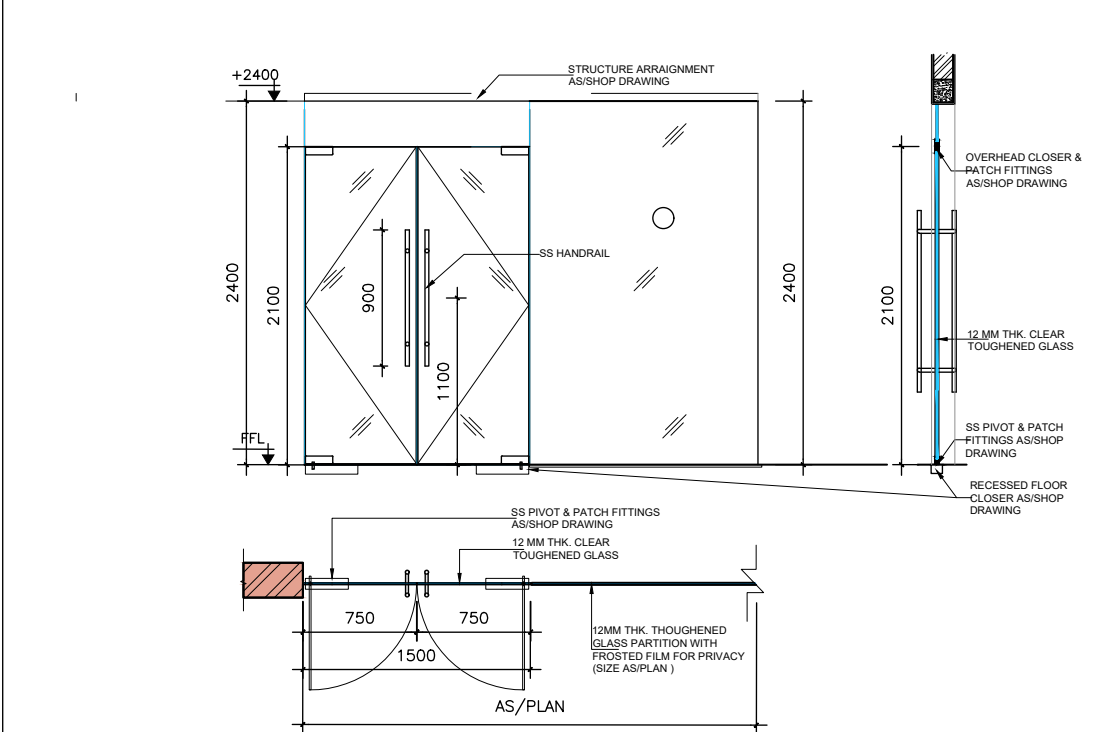

• TYPE : PIVOT FRAMELESS GLASS SWING DOOR (PAIR) WITH FRAMELESS FIXED GLAZING
• SIZE: 1500MMX2400MM

DOOR-SD4

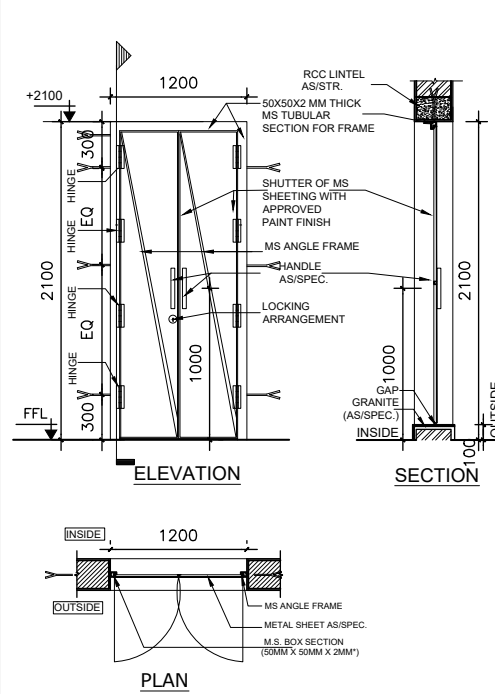

TYPE : M.S.PAINTED DOUBLE LEAF DOOR (2 HR. FIRE RATED)
• SIZE: 1200MMX2100MM
• SPECIFICATION OF MS BOX WILL BE AS PER STRUCTURE

SCHEDULE OF DOORS - (Ground floor to Terrace floor)

SL. NO	TYPE	NOS.	WIDTH	HEIGHT (from FFL.)	CILL (from FFL.)	LINTEL (from FFL.)	LOCATION	REMARKS
SCHEDULE OF DOORS								
1.	D	---	750	2100	00	2100	WC AND BATH	WPC DOOR PANEL WITH FRAME AS/DRAWING
2.	D1	---	900	2100	00	2100	TOILETS	WPC DOOR PANEL WITH FRAME AS/DRAWING
3.	D2	---	1000	2100	00	2100	ROOMS	SINGLE LEAF TEAK WOOD FRAME, FLUSH DOOR AS/DRAWING
4.	D4	---	1500	2100	00	2100	PASSAGE	DOUBLE LEAF TEAK WOOD FRAME, FLUSH DOOR AS/DRAWING
5.	D5	---	1050	2100	00	2100	PWD TOILET	WPC DOOR PANEL WITH FRAME AS/DRAWING
6.	GDW	---	2300	2400	00	2400	MAIN ENTRY	DOUBLE-LEAF GLASS DOOR WITH FRAME LESS FIXED GLAZING AS/DRAWING
7.	GDW1	---	4500	2400	00	2400	COMMON HALL	DOUBLE-LEAF GLASS DOOR WITH FRAME LESS FIXED GLAZING AS/DRAWING
8.	GDW2	---	1500	2400	00	2400	SPORTS ROOMS	DOUBLE-LEAF GLASS DOOR WITH FRAME LESS FIXED GLAZING
9.	FD	---	1500	2100	00	2100	STAIRCASE	2HR FIRE RATED METAL FIRE DOOR
10.	RS	---	2630	2400	00	2400	ATM ROOM	ROLLING SHUTTER
11.	SD	---	900	2100	100	2100	FHC SHAFT	M.S.SINGLE LEAF DOOR WITH GLASS (FHC Shaft Door as per NBC & latest CPWD Guideline)
12.	SD4	---	1200	2100	00	2100	MUMTY DOOR	M.S.DOUBLE LEAF DOOR

TENDER DRAWING

CLIENT
 OIL INDIA LIMITED
(A Govt. of India Enterprise)

CONSULTANT
 RITES
THE INFRASTRUCTURE PEOPLE
(A Govt. of India Enterprise)

PROJECT
BQ WORKMEN HOUSING


BUILDING
COMMUNITY CENTRE (G+1)

DRAWING TITLE
DOOR-WINDOW-1

DRG. NO.
MITES/BLD/AR/TD/054


NORTH

SCALE
NTS
DATE
JULY 2025

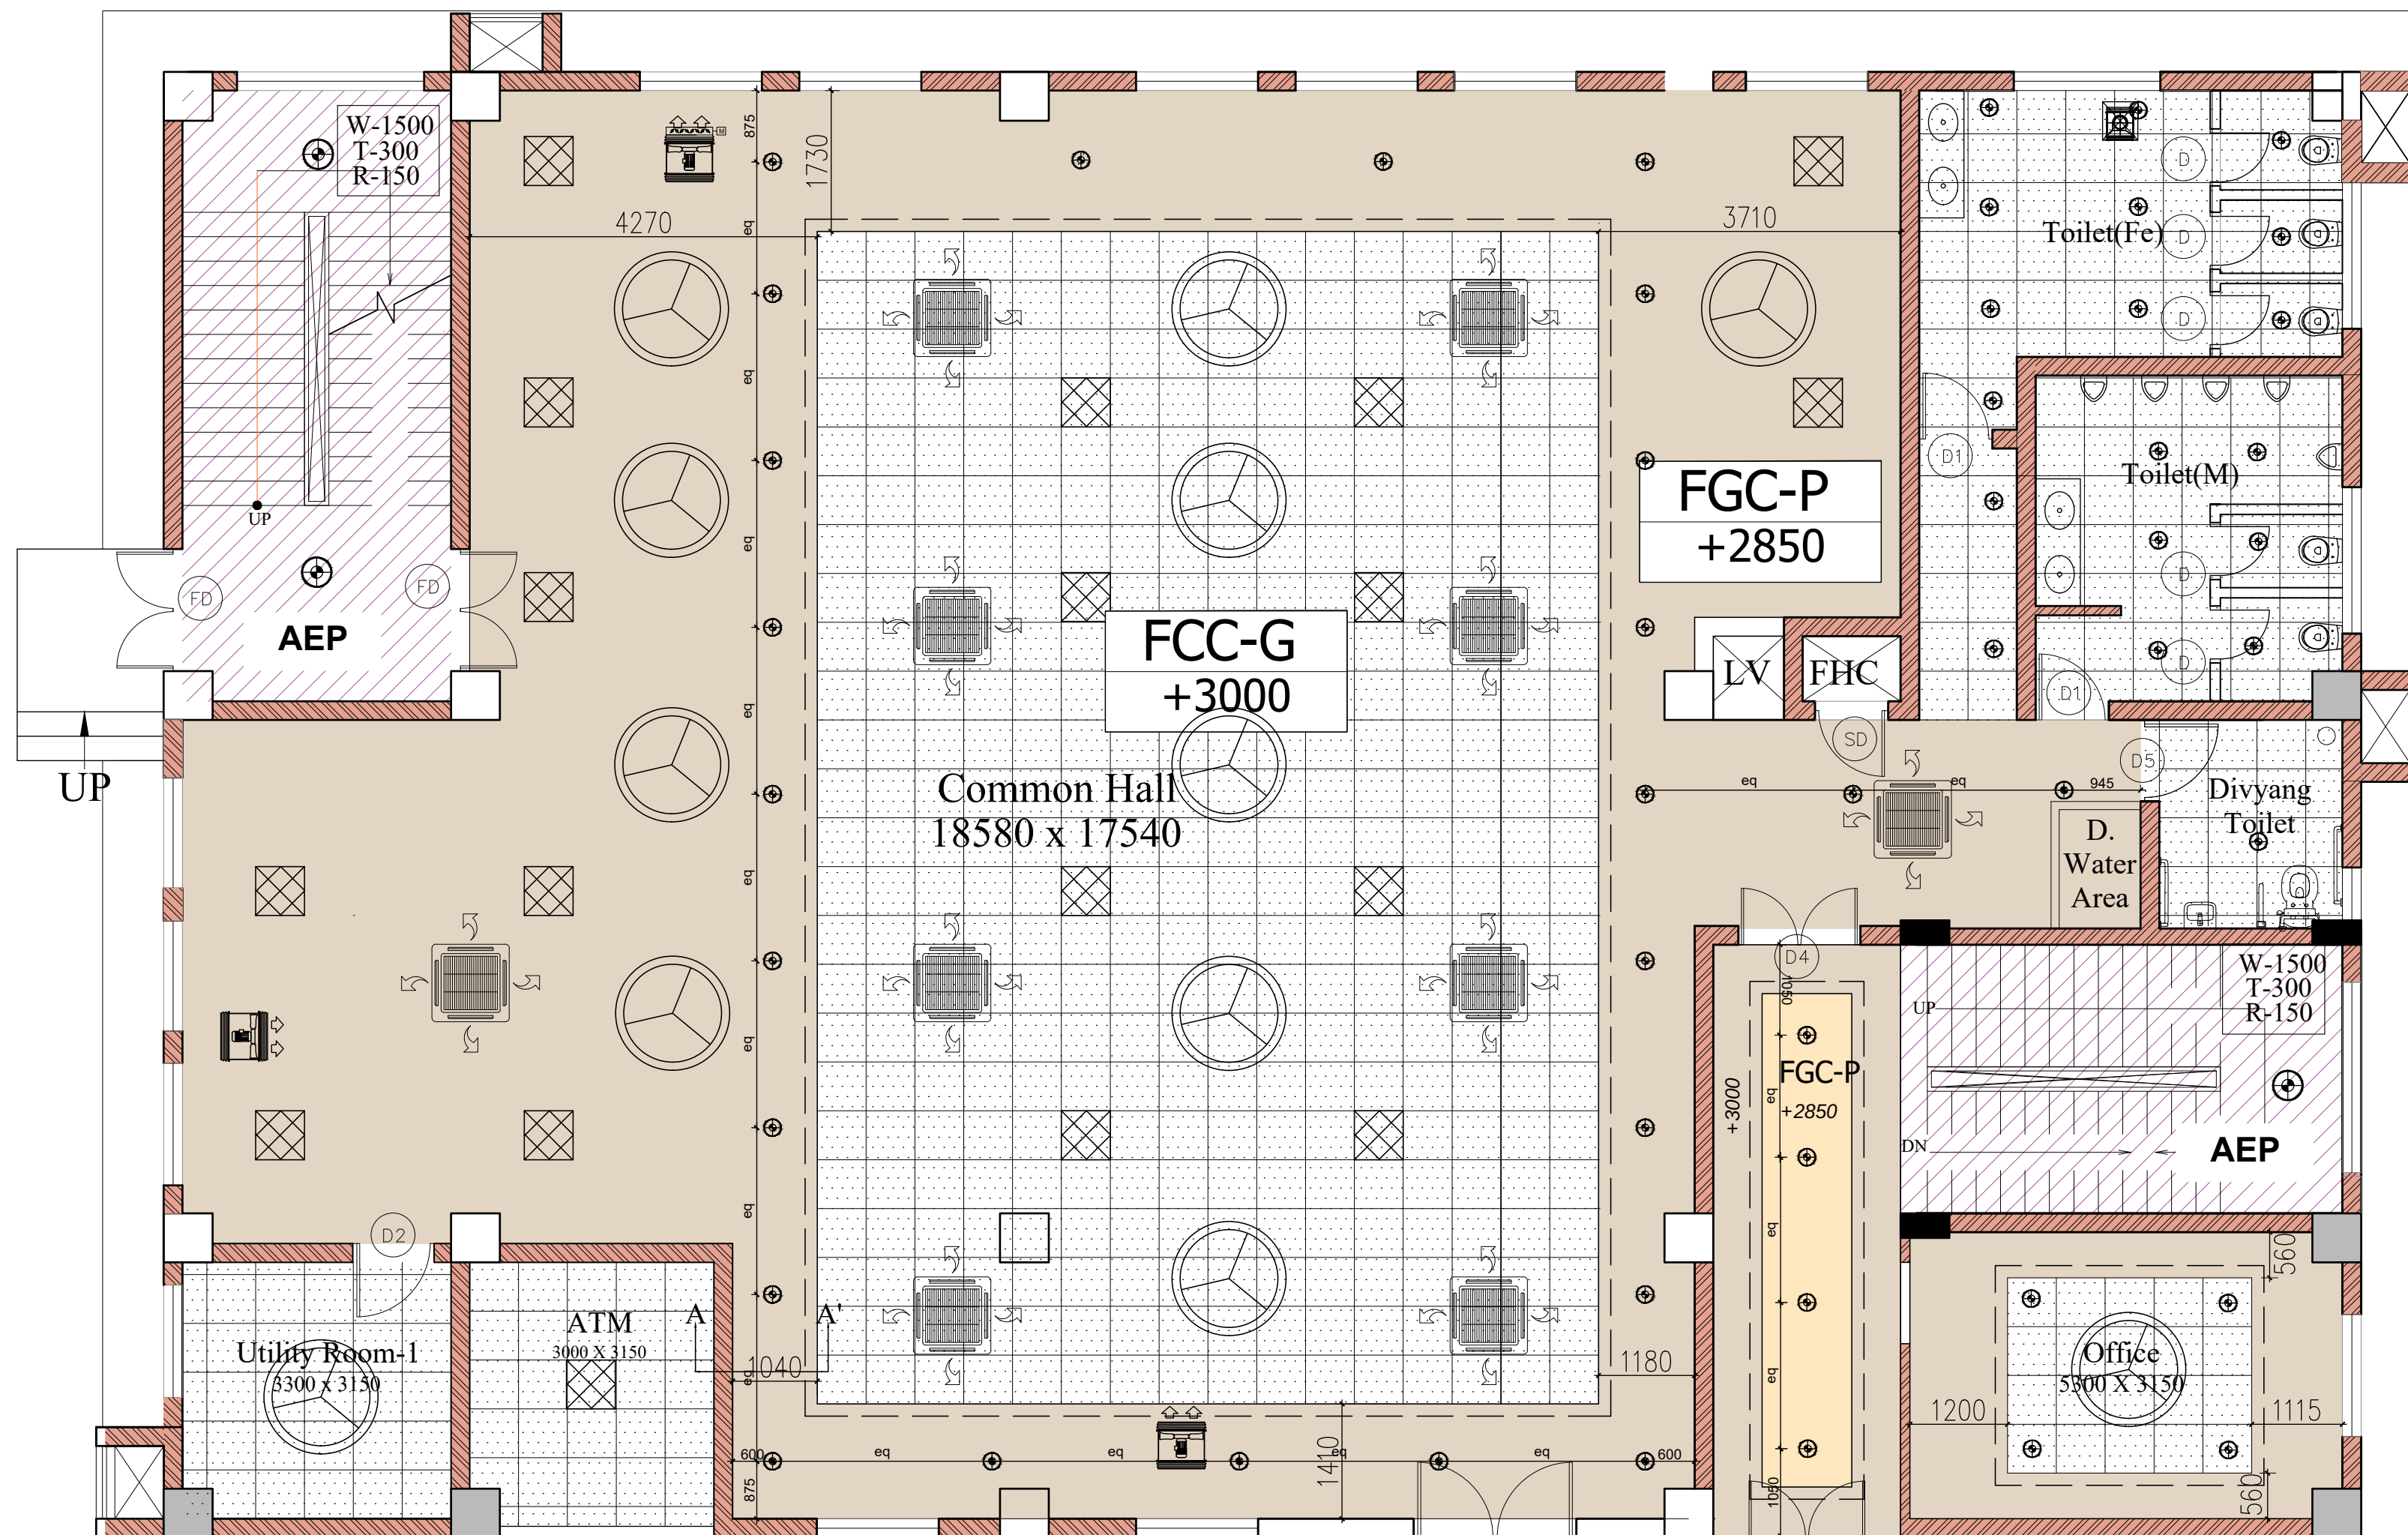


FCC-G: CALCIUM SILICATE GRID FALSE CEILING
FGC-P: GYPSUM BOARD PLAIN FALSE CEILING
AEP: ACRYLIC EMULSION PAINT OVER PUTTY

Note: Level to Be Measured from FFL

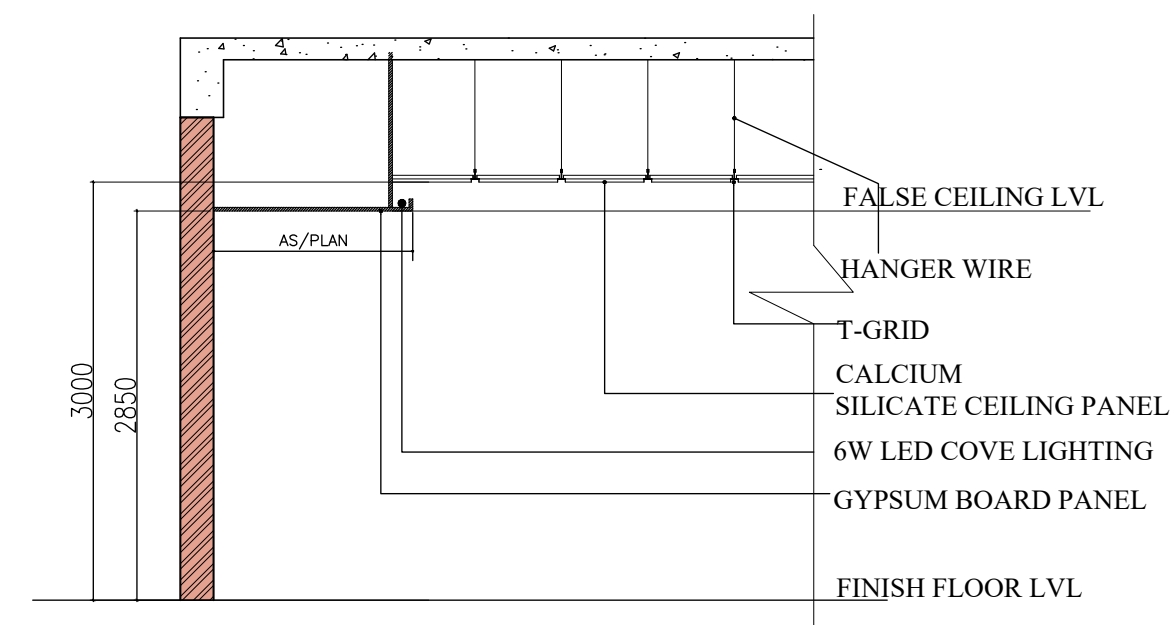

TYPICAL DETAIL-A

KEY PLAN

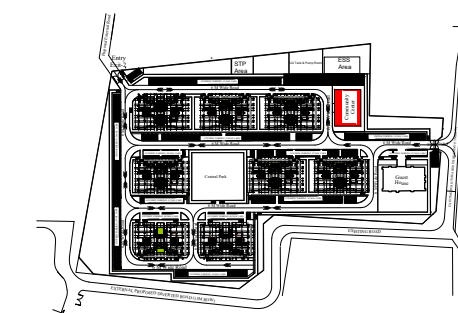

NOTES

1. ALL DIMENSIONS ARE IN MM, UNLESS NOTED OTHERWISE.
2. WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
4. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.

TENDER DRAWING

CLIENT  **OIL INDIA LIMITED**
(A Govt. of India Enterprise)


CONSULTANT  **RITES**
THE INFRASTRUCTURE PEOPLE
(A Govt. of India Enterprise)


PROJECT **BQ WORKMEN HOUSING**

BUILDING **COMMUNITY CENTRE (G+1)**

DRAWING TITLE **RCP_GROUND FLOOR**

DRG. NO. **BITES/BLD/AR/TD/056**


NORTH 	SCALE NTS	DATE JULY 2025
--	---------------------	--------------------------

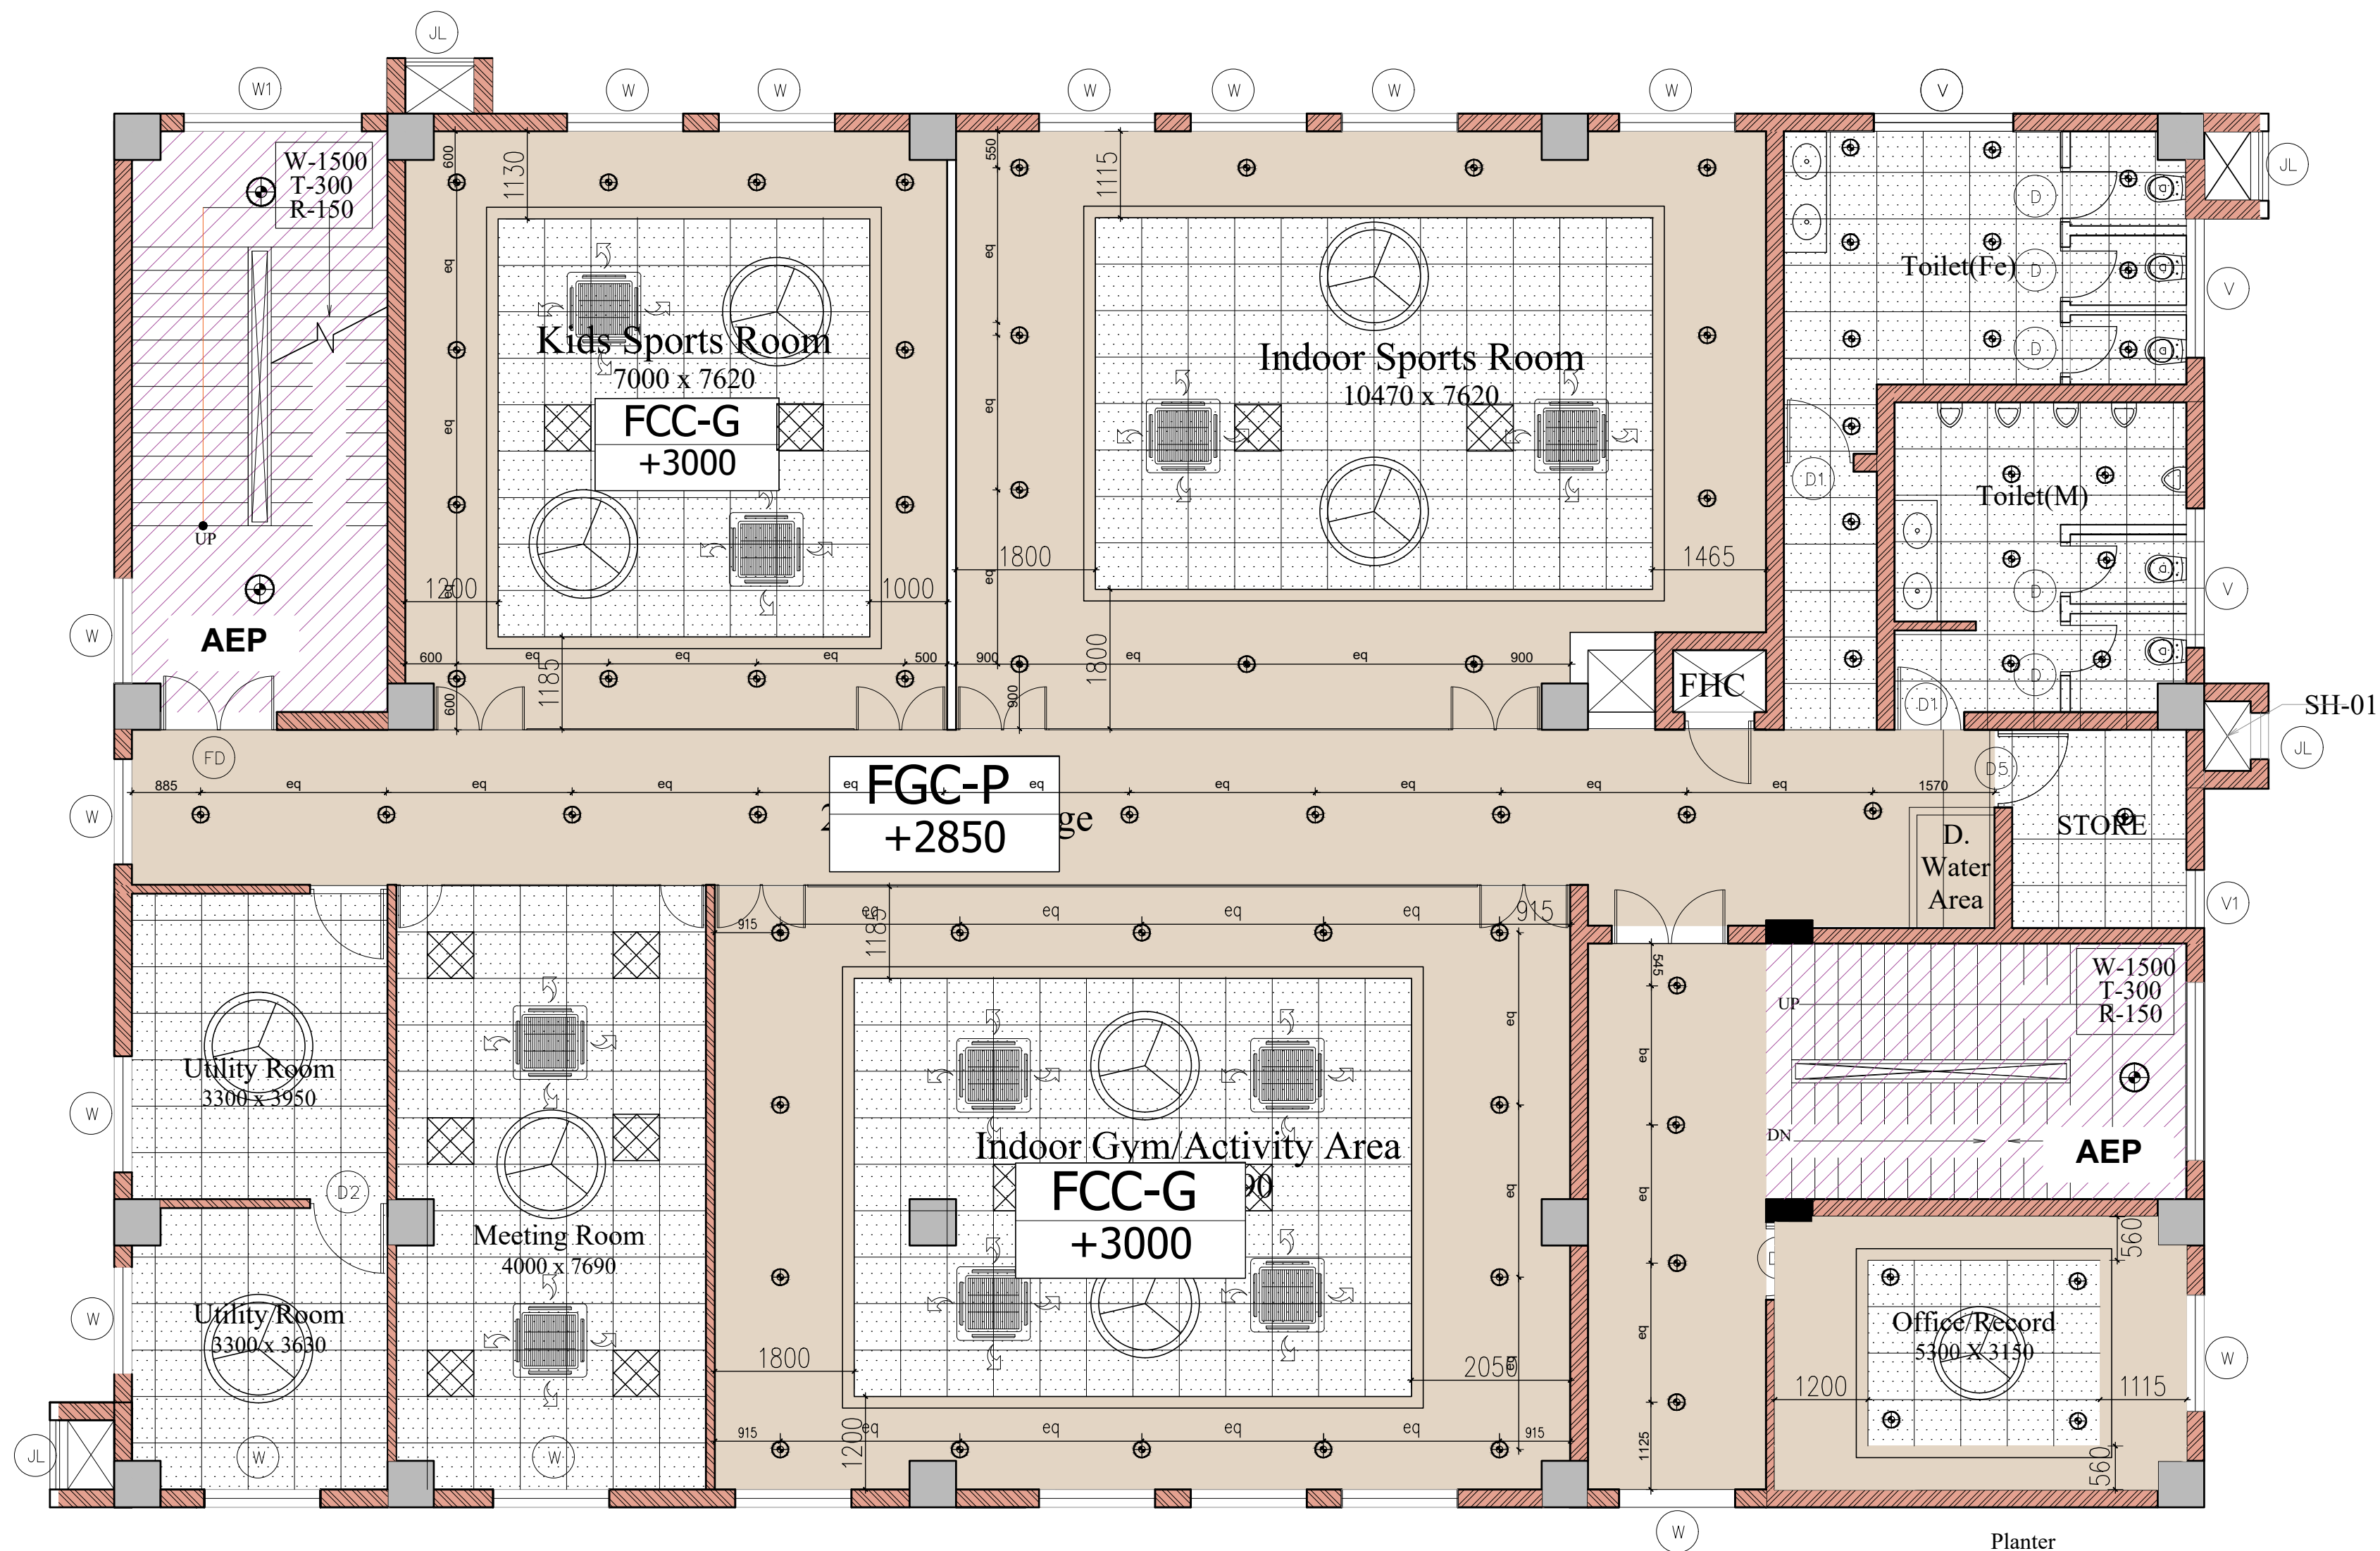

FCC-G: CALCIUM SILICATE GRID FALSE CEILING
FGC-P: GYPSUM BOARD PLAIN FALSE CEILING
AEP: ACRYLIC EMULSION PAINT OVER PUTTY

Note: Level to Be Measured from FFL

KEY PLAN

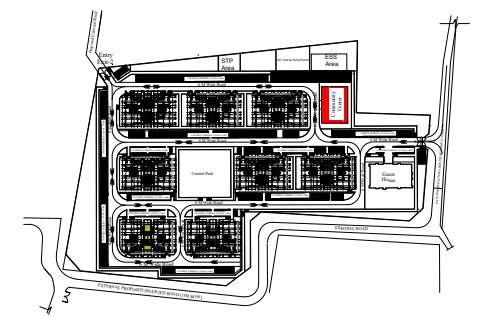



NOTES

1. ALL DIMENSIONS ARE IN MM, UNLESS NOTED OTHERWISE.
2. WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
4. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.

Sn.No.	Description	Area (Sqm)
01	Ground Floor Area	490 sqm
02	First Floor Area	490 sqm
03	Mumty Area	55 sqm

TENDER DRAWING


CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT		
PROJECT	BQ WORKMEN HOUSING	
BUILDING	COMMUNITY CENTRE (G+1)	
DRAWING TITLE	RCP_FIRST FLOOR	
DRG. NO.	MITES/BLD/AR/TD/055	
NORTH	SCALE	DATE
	NTS	JULY 2025

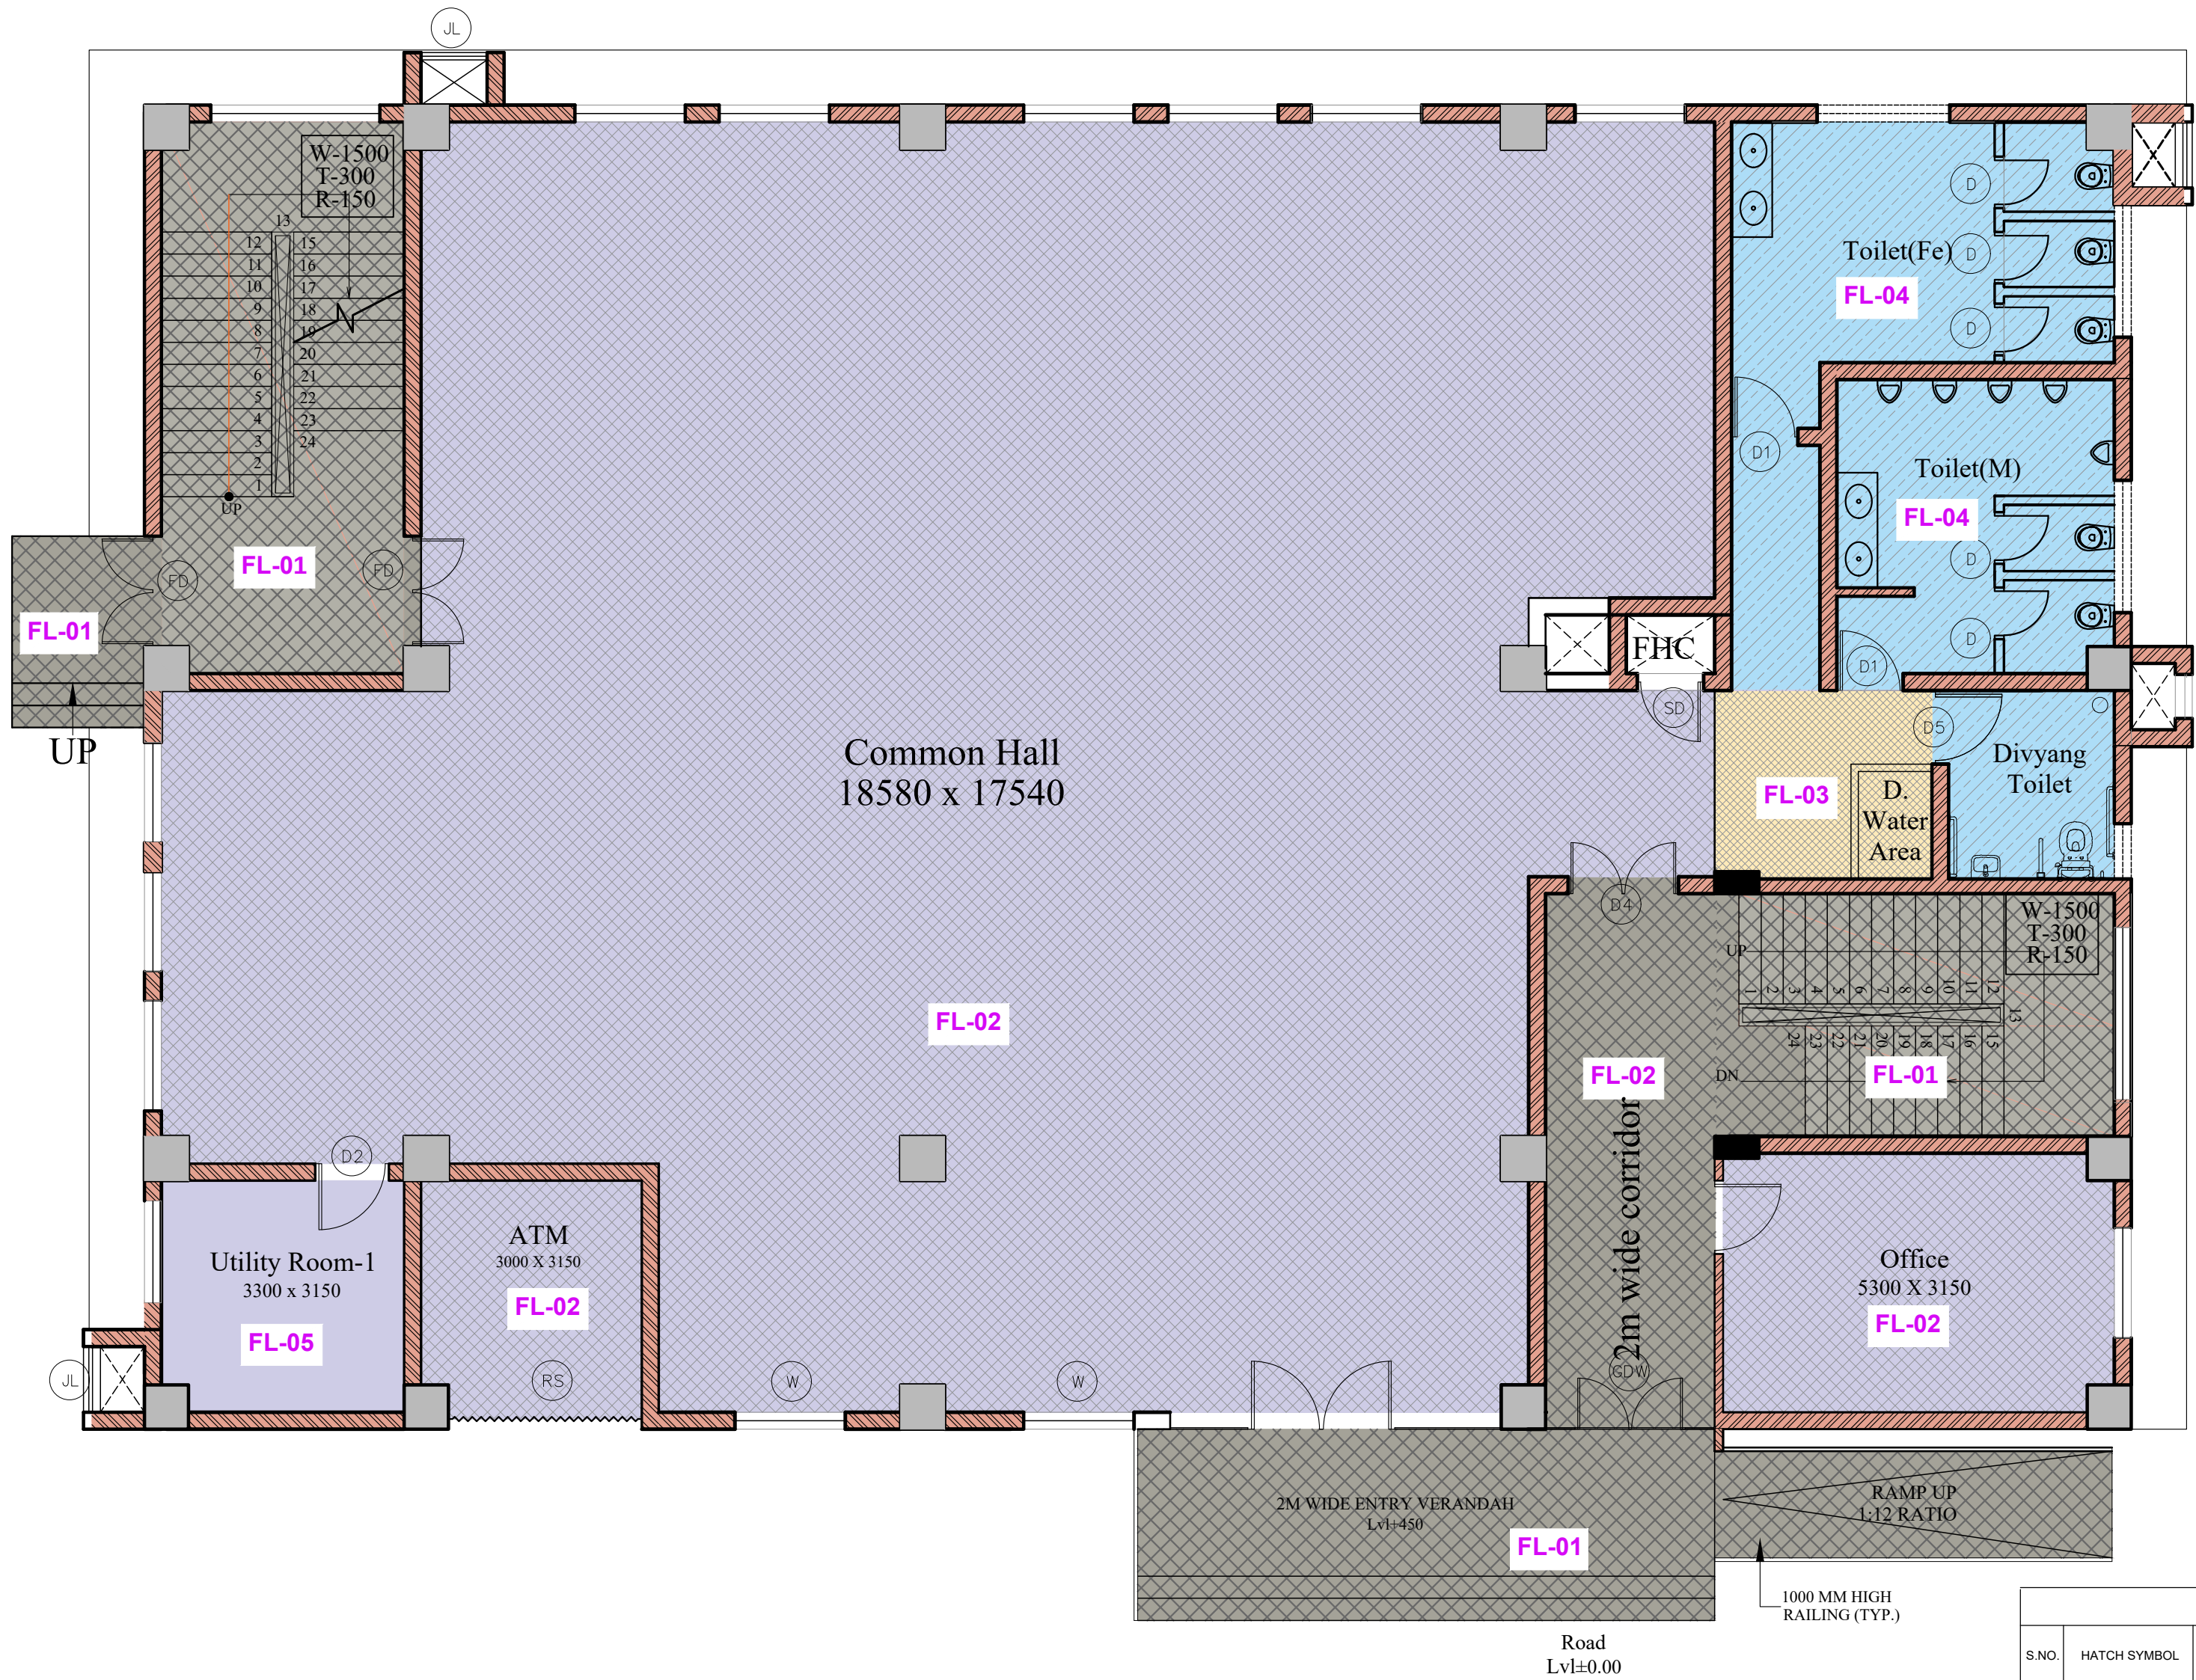

GROUND FLOOR PLAN

LEGEND FOR FLOORING				
S.NO.	HATCH SYMBOL	ICON	MATERIAL	AREA OF APPLICATION
01		FL-01	18MM THK POLISHED GRANITE FLOORING PER SPECS	• FRONT & SIDE ENTRANCE • ENTRY/STEPS/RAMP • VERANDAH, FRONT ENTRANCE CORRIDOR
02		FL-02	POLISHED VITRIFIED TILE (800 X 800)	• COMMON HALL • OFFICE • ATM
03		FL-03	MATT/ANTISKID GLAZED VITRIFIED TILE (800 X 800)	• DRINKING WATER AREA
04		FL-04	RECTIFIED ANTI SKID CERAMIC TILES (300 X 300)	• TOILETS
05		FL-05	25MM THK. KOTA STONE	• UTILITY ROOMS
06		FL-01	18MM THK POLISHED GRANITE FLOORING WITH ANTI SKID GROOVE AS PER SPECS	• STAIRCASE
07		FL-07	LIQUID RUBBER WATER PROOFING, LAYING CC 1:2:4 CONCRETE FOR ROOF GRADING, HEAT RESISTANT SRI TILES AS PER SPECIFICATIONS.	---
08	SKIRTING 100 MM HIGH, MATCHING THE FLOOR FINISH; DADO IN TOILETS & D.WATER UP TO FALSE CEILING LEVEL ALL AS PER SPECIFICATIONS			

KEY PLAN

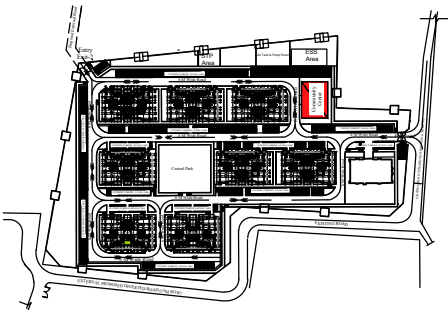

NOTES

1. ALL DIMENSIONS ARE IN MM; UNLESS NOTED OTHERWISE.
2. WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
4. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.
5. THE FINISHED FLOOR LEVEL (FFL) SHALL BE MAINTAINED MINIMUM 50MM OR AS PER APPLICABLE CODES/SPECIFICATIONS/SITE REQUIREMENTS ABOVE THE STRUCTURAL SLAB LEVEL OF ALL BUILDINGS. REFER TENDER DOCUMENT FOR DETAILS.

TENDER DRAWING

CLIENT
 OIL INDIA LIMITED
(A Govt. of India Enterprise)

CONSULTANT
 RITES
THE INFRASTRUCTURE PEOPLE
(A Govt. of India Enterprise)

PROJECT
BQ WORKMEN HOUSING


BUILDING
COMMUNITY CENTRE (G+1)

DRAWING TITLE
FLOORING DETAIL

DRG. NO.
RITES/BLD/AR/TD/057

NORTH


SCALE
NTS
DATE
JULY 2025

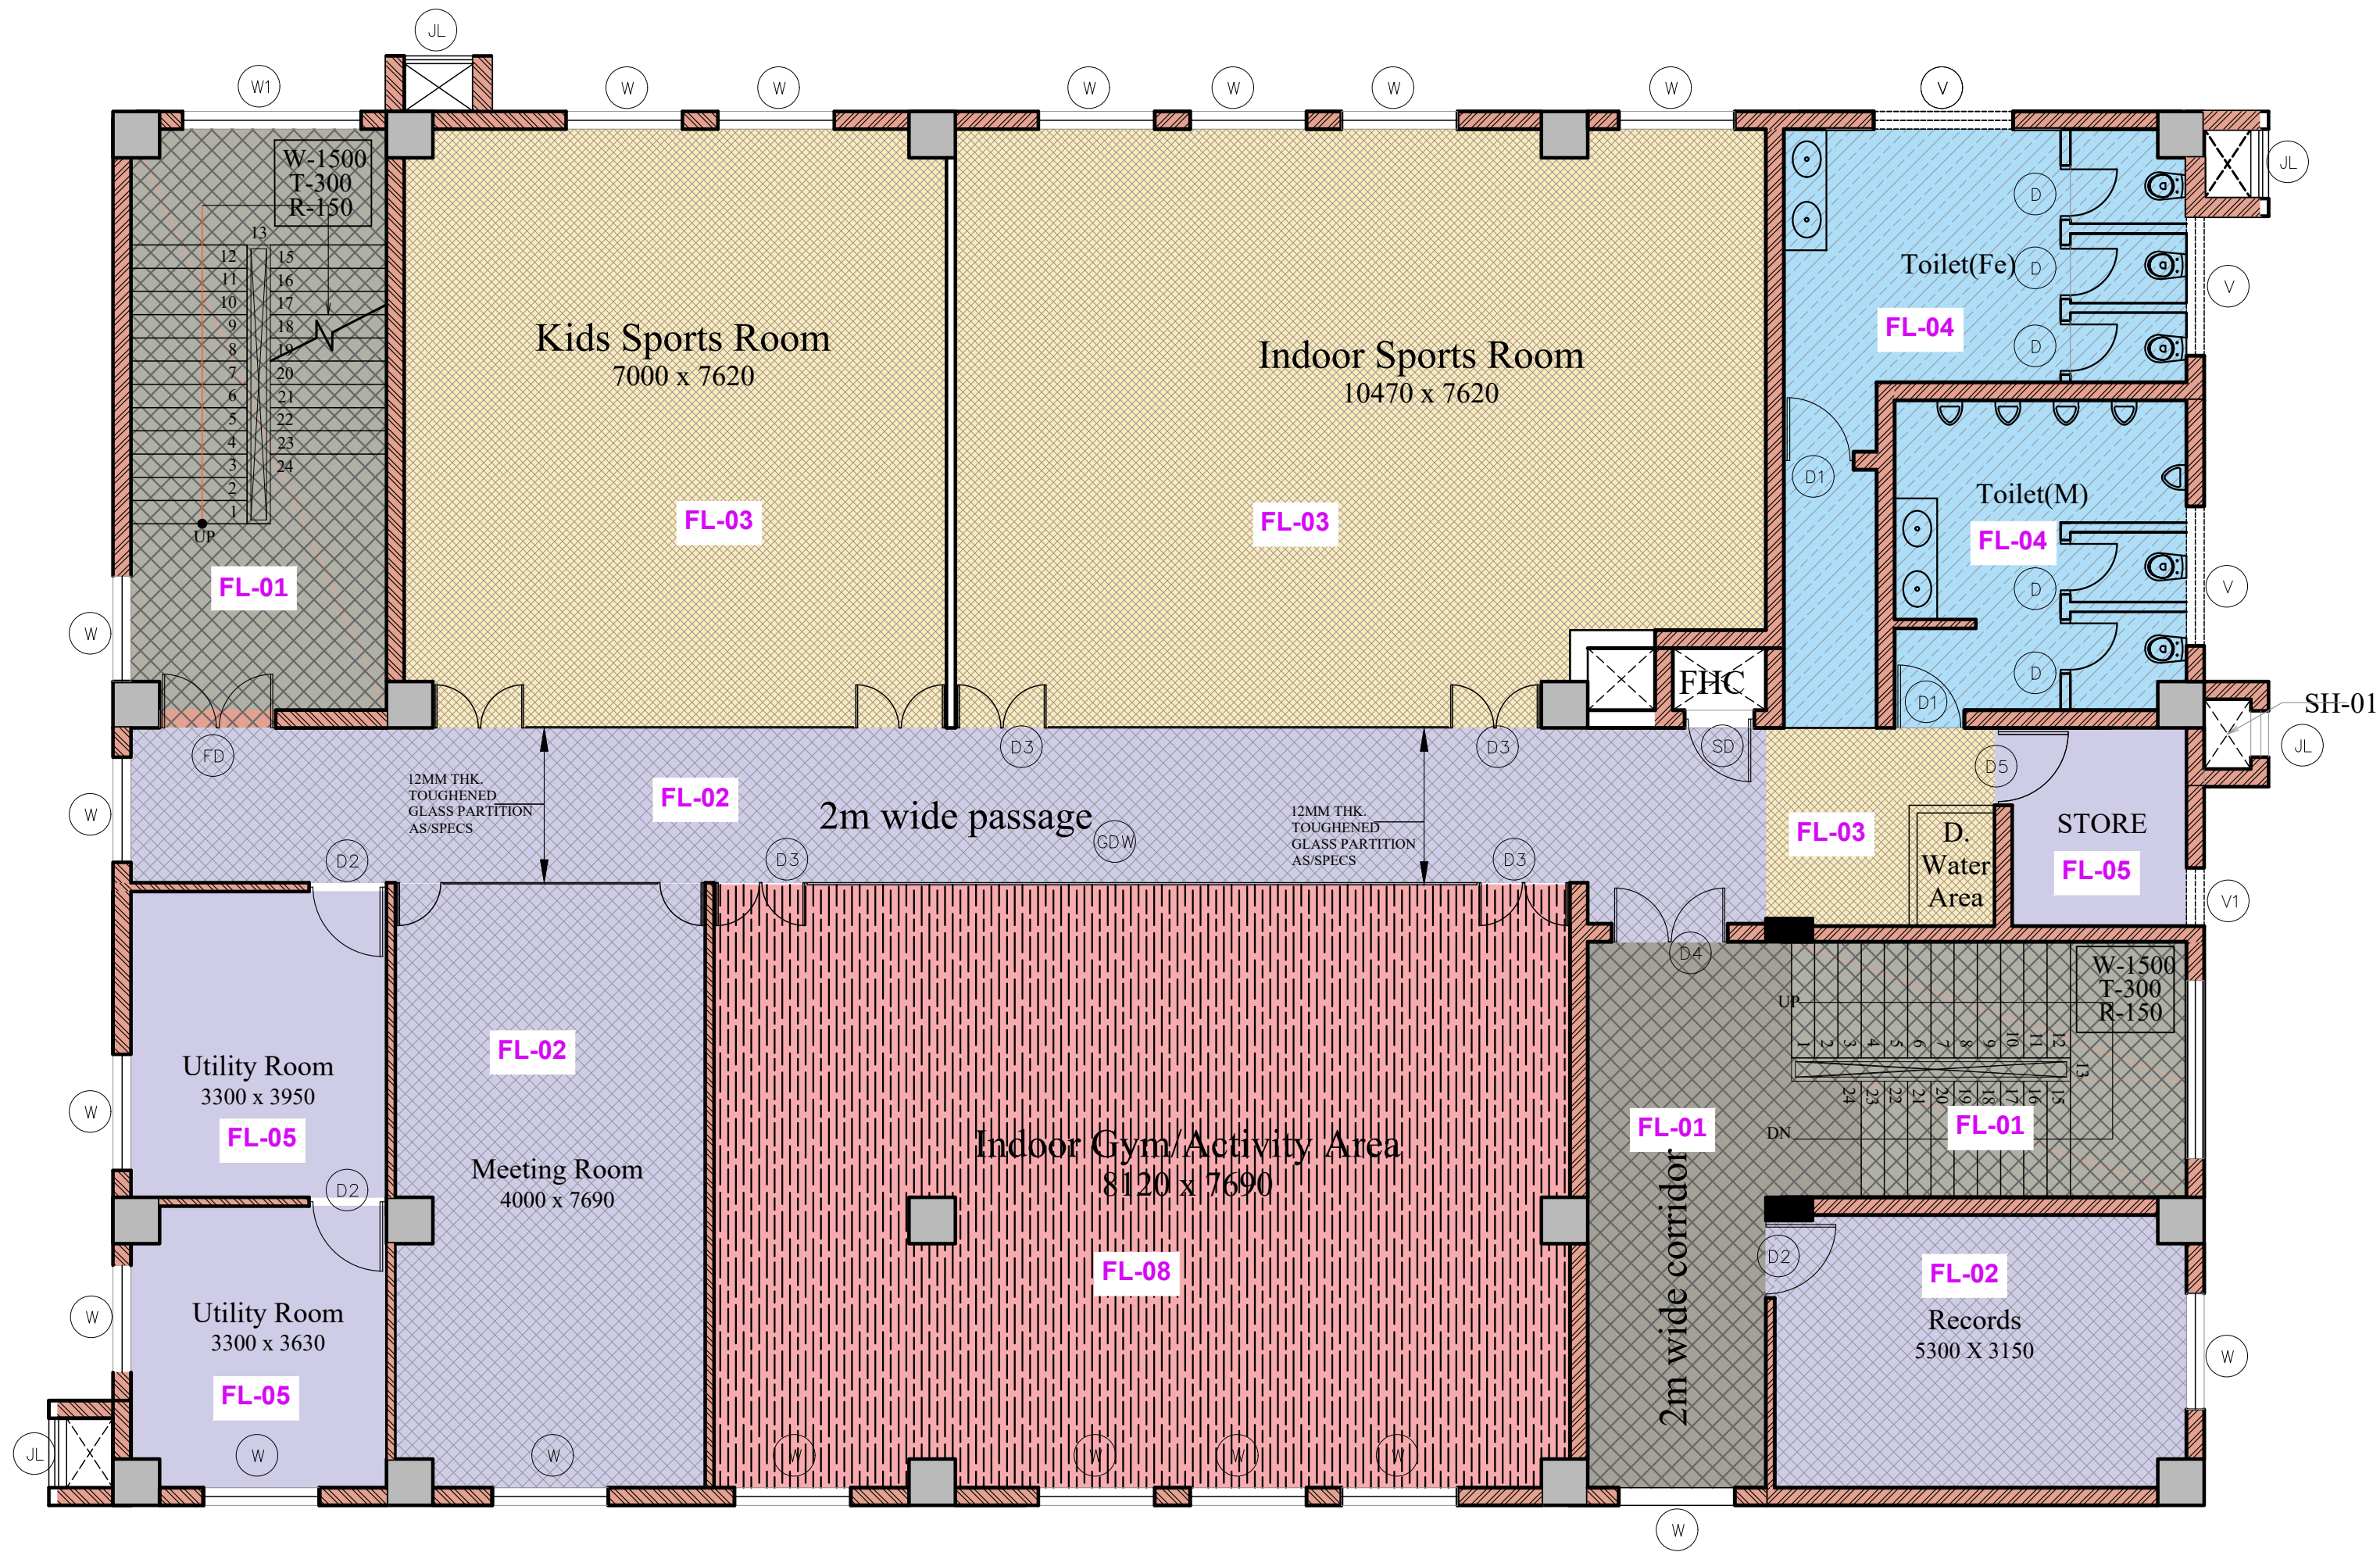

FIRST FLOOR PLAN

LEGEND FOR FLOORING				
S.NO.	HATCH SYMBOL	ICON	MATERIAL	AREA OF APPLICATION
01		FL-01	18MM THK POLISHED GRANITE FLOORING PER SPECS	• CORRIDOR
02		FL-02	POLISHED VITRIFIED TILE (800 X 800)	• MEETING ROOM • RECORD • PASSAGE
03		FL-03	ANTISKID GLAZED VITRIFIED TILE (800 X 800)	• DRINKING WATER AREA • INDOOR SPORTS ROOM • KIDS SPORTS ROOM
04		FL-04	RECTIFIED ANTI SKID CERAMIC TILES (300 X 300)	• TOILETS
05		FL-05	25MM THK. KOTA STONE	• UTILITY ROOMS
06		FL-01	18MM THK POLISHED GRANITE FLOORING WITH ANTI SKID GROOVE AS PER SPECS	• STAIRCASE
07		FL-07	LIQUID RUBBER WATER PROOFING, LAYING CC 1:2:4 CONCRETE FOR ROOF GRADING, HEAT RESISTANT SRI TILES AS PER SPECIFICATIONS.	---
08		FL-08	25MM THK. WOODEN FLOORING WITH 2ND CLASS TEAK WOOD	• INDOOR GYM/ACTIVITY AREA
09	SKIRTING 100 MM HIGH, MATCHING THE FLOOR FINISH; DADO IN TOILETS & D.WATER UP TO FALSE CEILING LEVEL ALL AS PER SPECIFICATIONS			

KEY PLAN

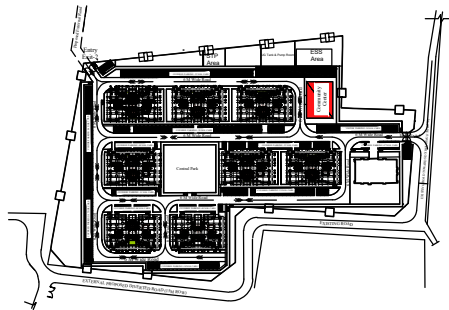


NOTES

- ALL DIMENSIONS ARE IN MM; UNLESS NOTED OTHERWISE.
- WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
- ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
- THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.
- THE FINISHED FLOOR LEVEL (FFL) SHALL BE MAINTAINED MINIMUM 50MM OR AS PER APPLICABLE CODES/SPECIFICATIONS/ SITE REQUIREMENTS ABOVE THE STRUCTURAL SLAB LEVEL OF ALL BUILDINGS. REFER TENDER DOCUMENT FOR DETAILS.

TENDER DRAWING


CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	COMMUNITY CENTRE (G+1)	
DRAWING TITLE	FLOORING DETAIL	
DRG. NO.	RITES/BLD/AR/TD/058	
NORTH	SCALE	DATE
	NTS	JULY 2025

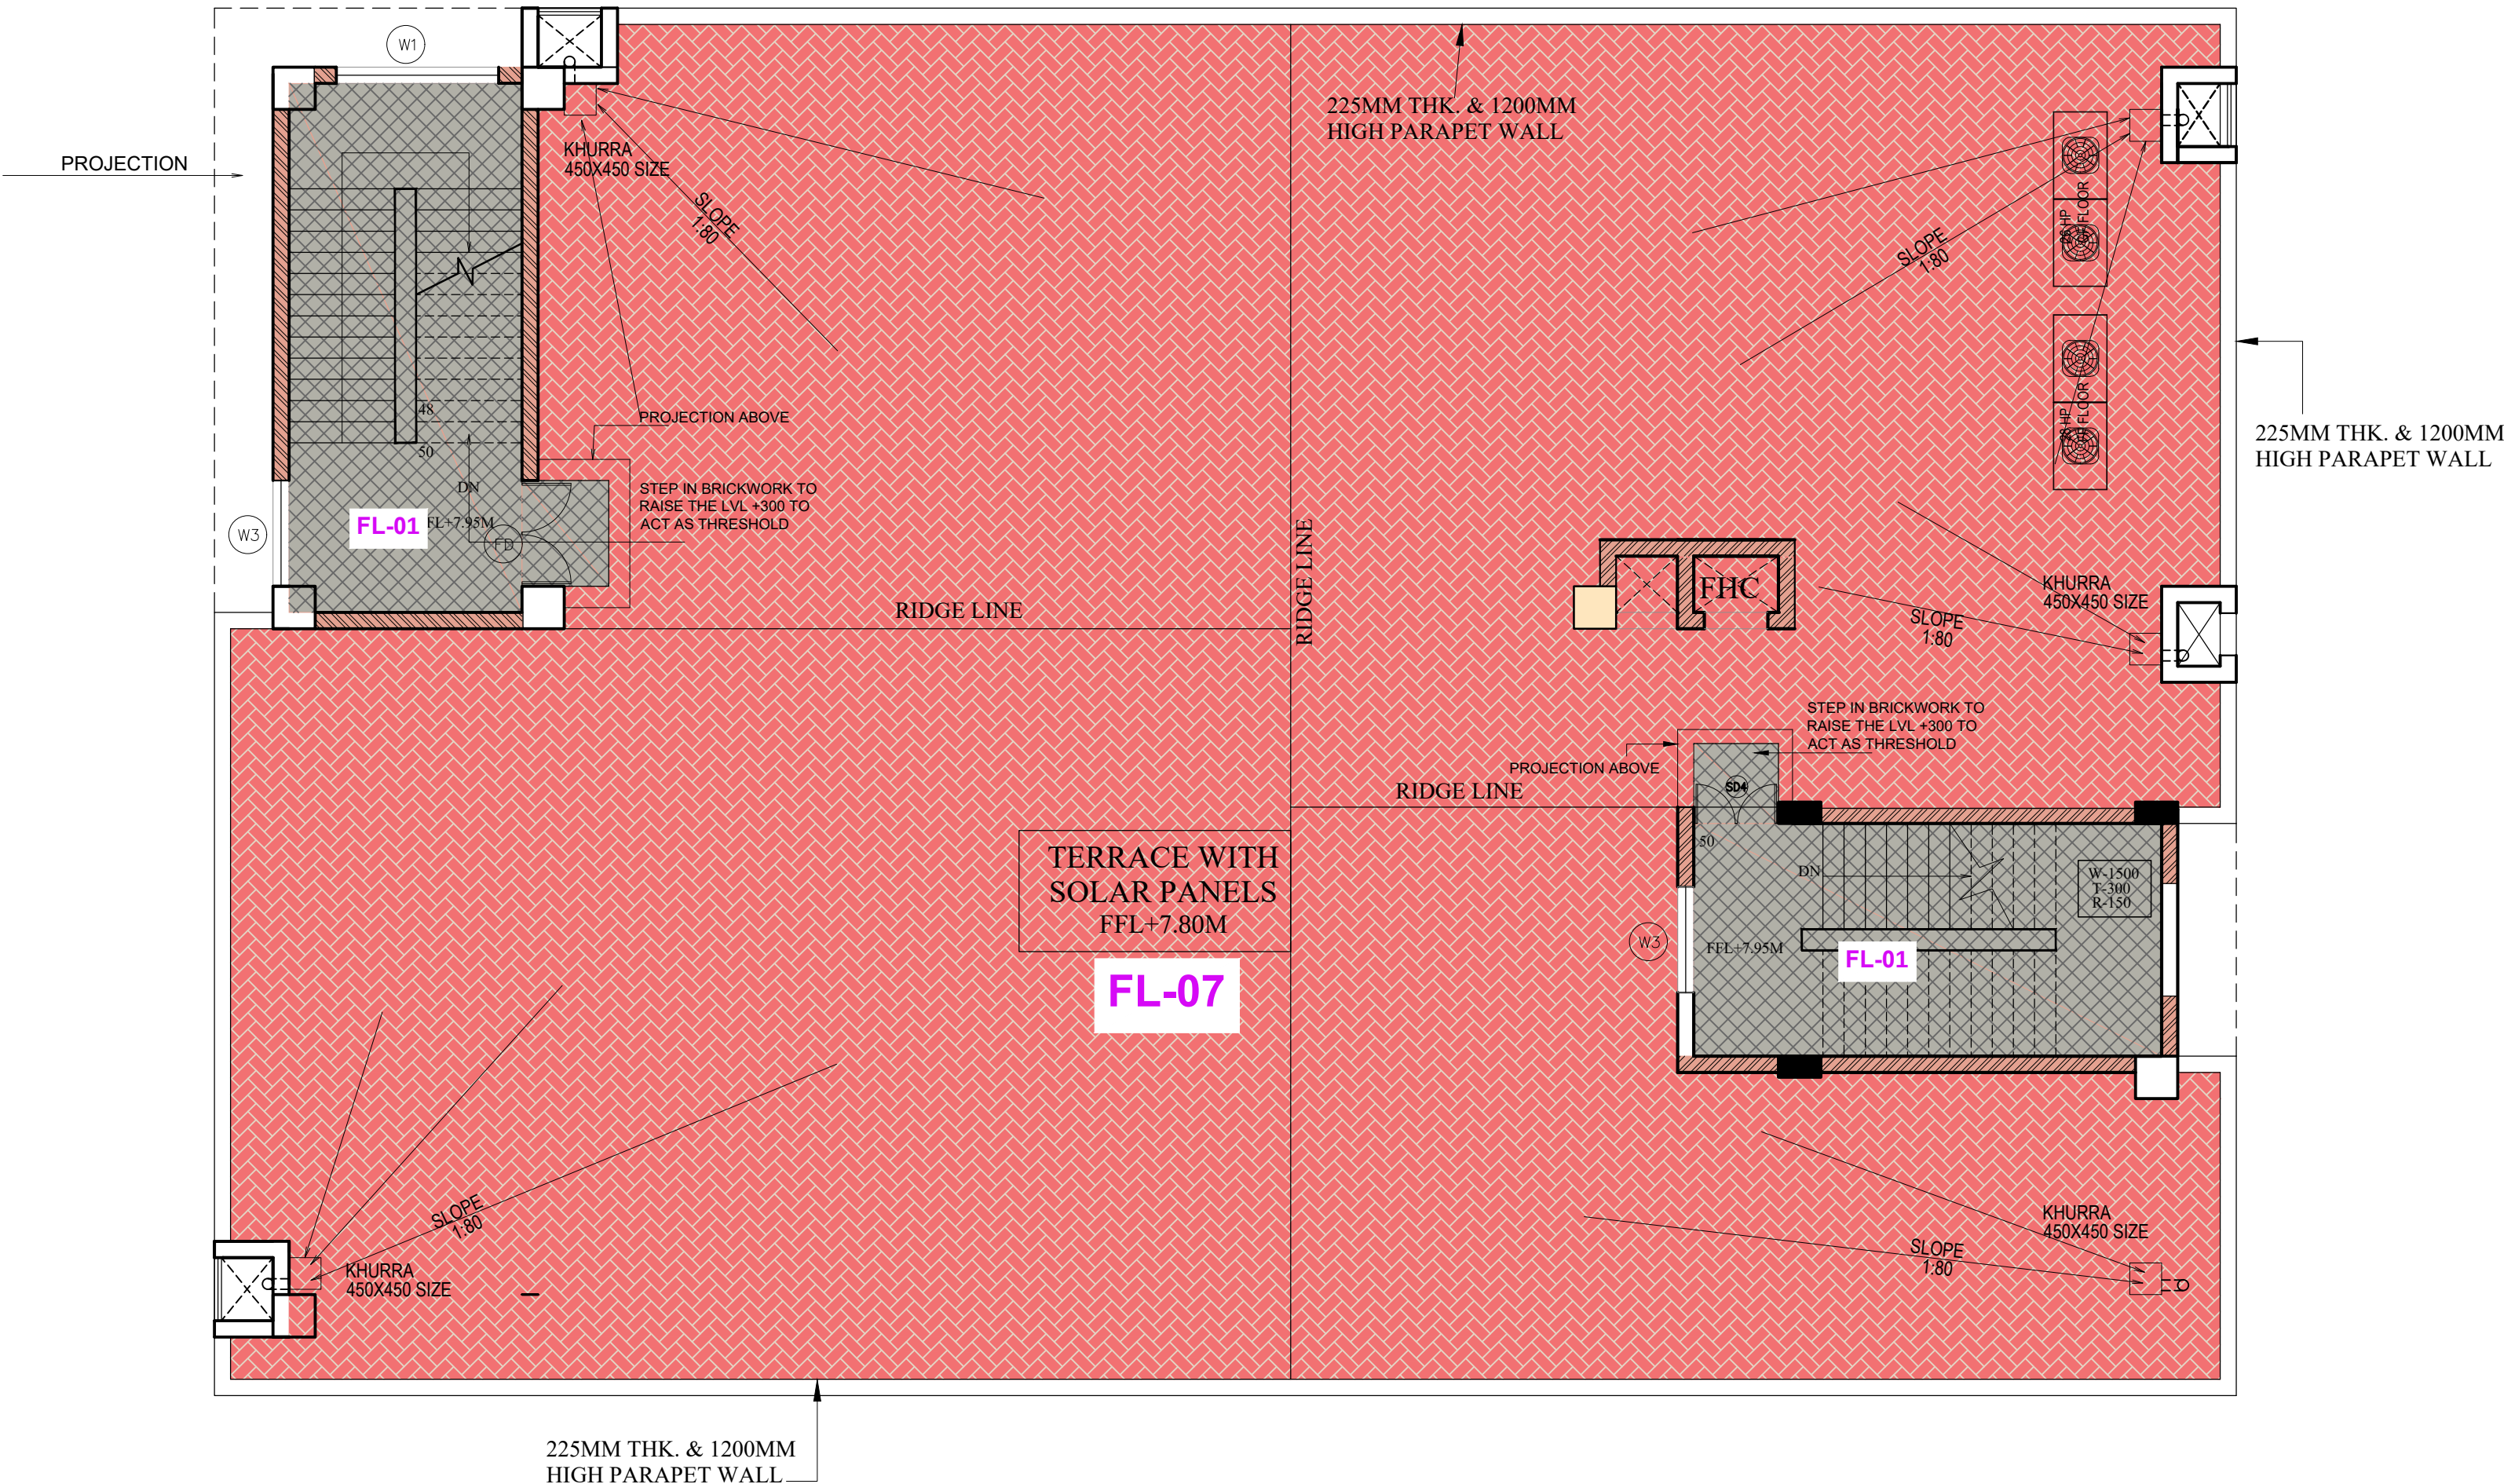

TERRACE PLAN

01		FL-07	LIQUID RUBBER WATER PROOFING, LAYING CC 1:2:4 CONCRETE FOR ROOF GRADING, HEAT RESISTANT SRI TILES AS PER SPECIFICATIONS.	TERRACE
02		FL-01	18MM THK POLISHED GRANITE FLOORING WITH ANTI SKID GROOVE AS PER SPECS	STAIRCASE/MUMTY

KEY PLAN

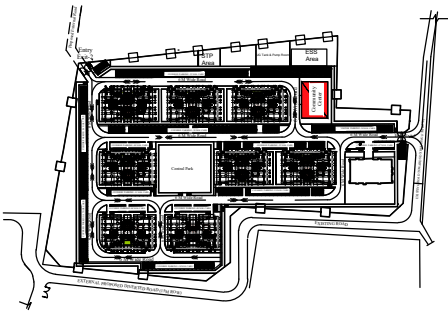


NOTES


- ALL DIMENSIONS ARE IN MM; UNLESS NOTED OTHERWISE.
- WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
- ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
- THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.
- THE FINISHED FLOOR LEVEL (FFL) SHALL BE MAINTAINED MINIMUM 50MM OR AS PER APPLICABLE CODES/SPECIFICATIONS/ SITE REQUIREMENTS ABOVE THE STRUCTURAL SLAB LEVEL OF ALL BUILDINGS. REFER TENDER DOCUMENT FOR DETAILS.

TENDER DRAWING


CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	COMMUNITY CENTRE (G+1)	
DRAWING TITLE	FLOORING DETAIL	
DRG. NO.	RITES/BLD/AR/TD/059	
NORTH	SCALE	DATE
	NTS	JULY 2025

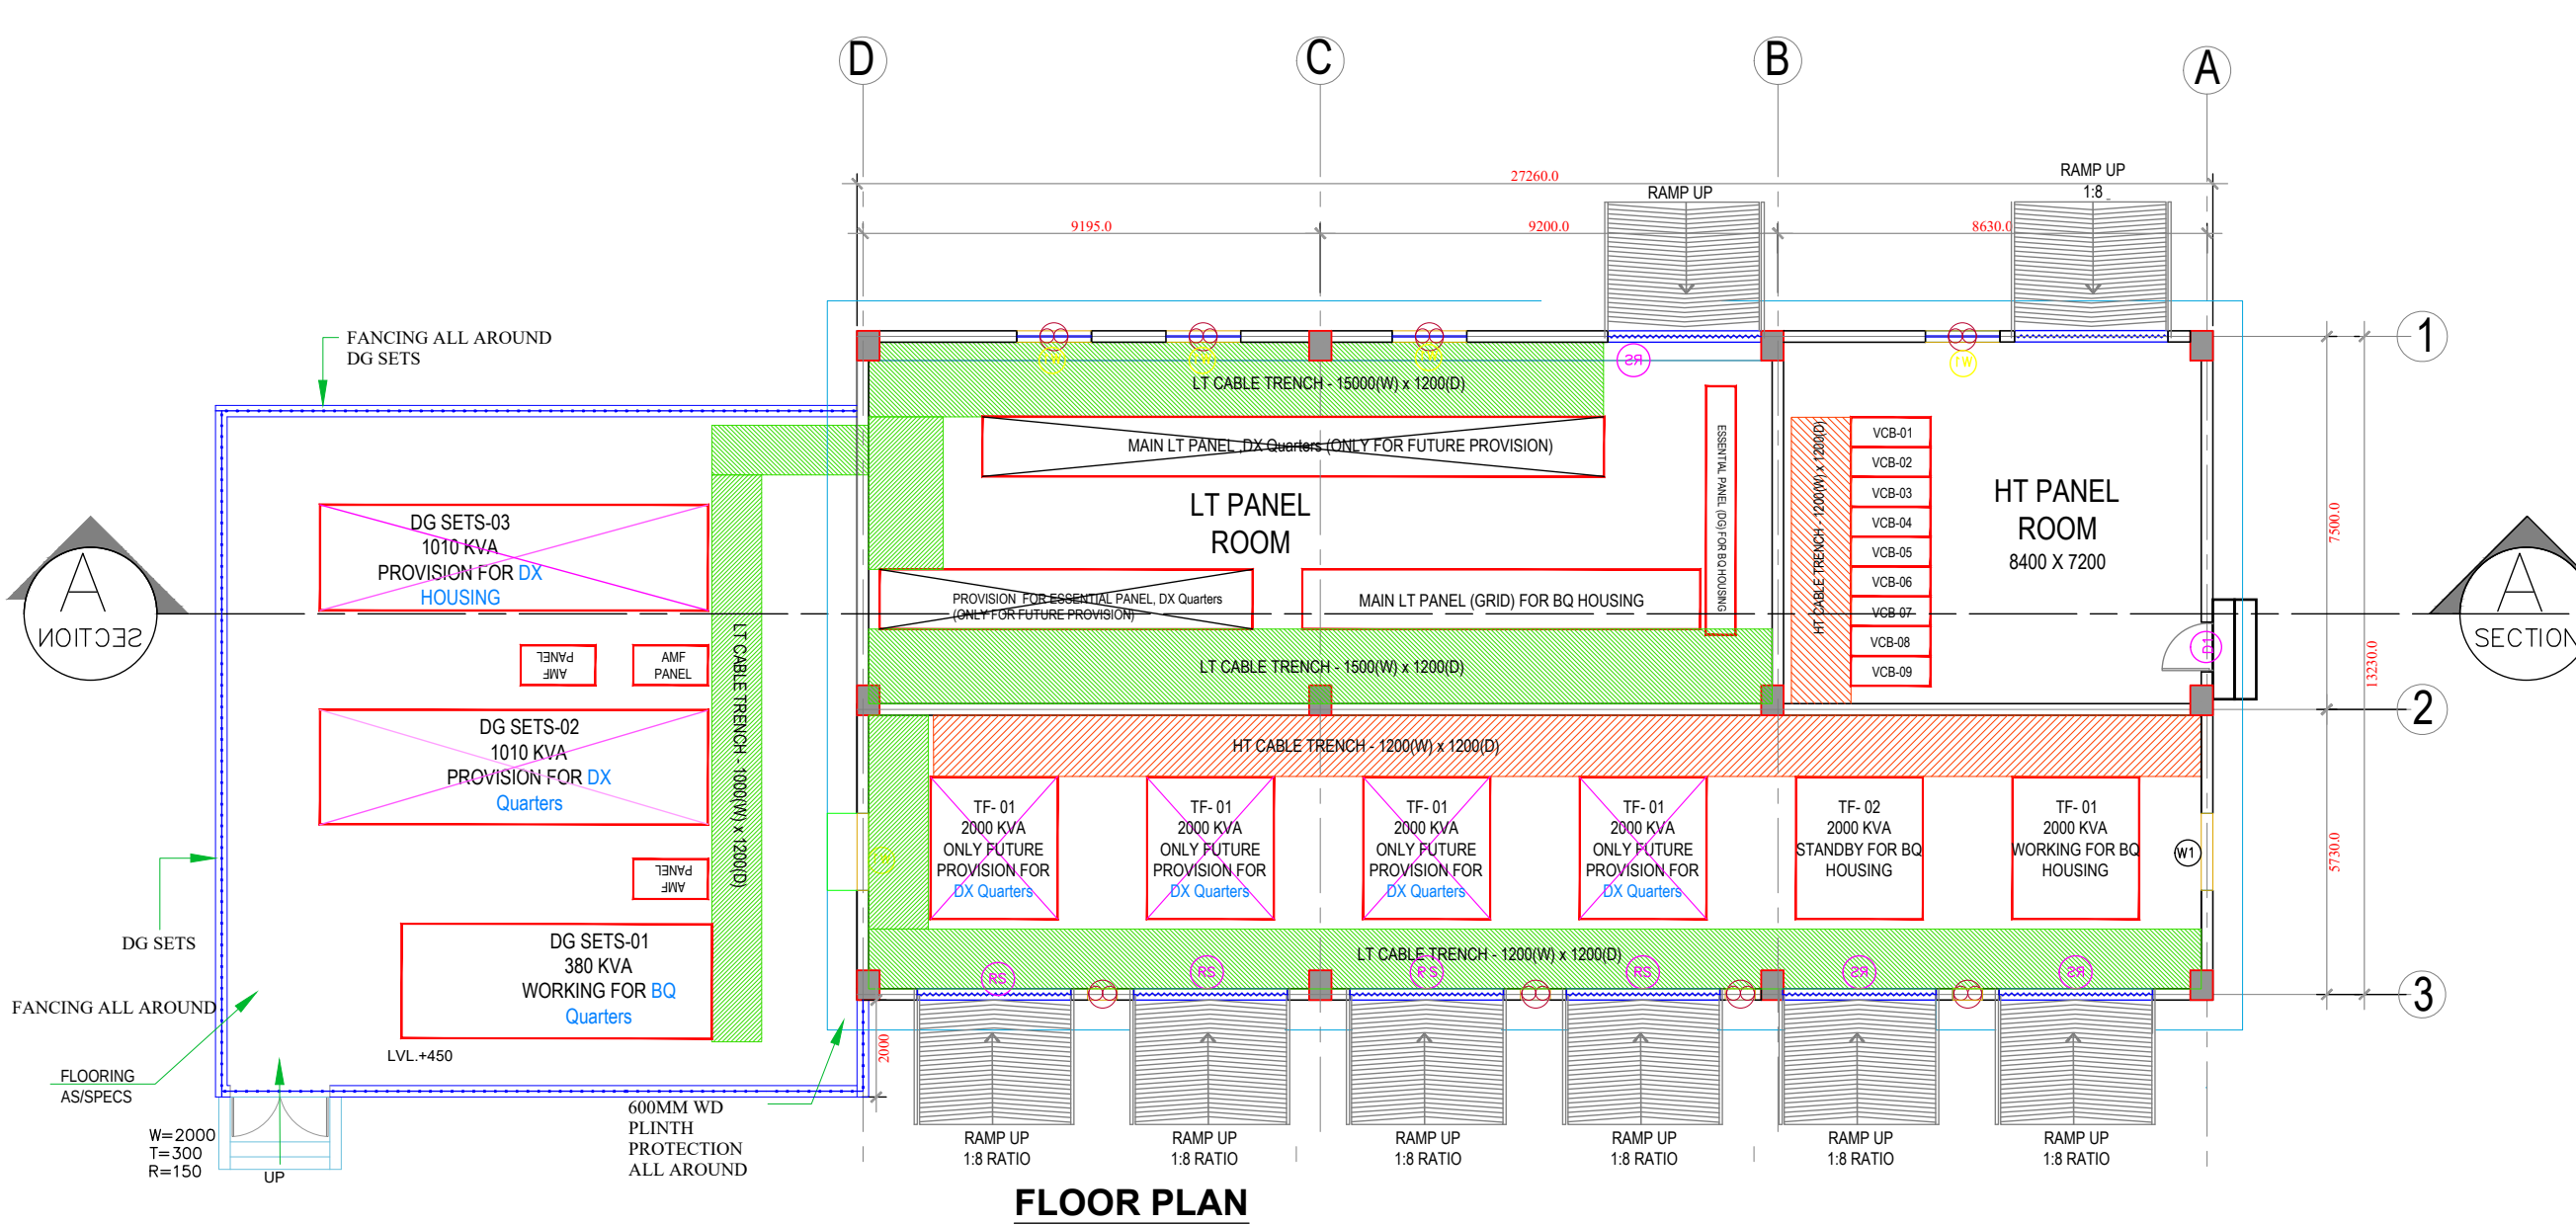

FLOOR PLAN

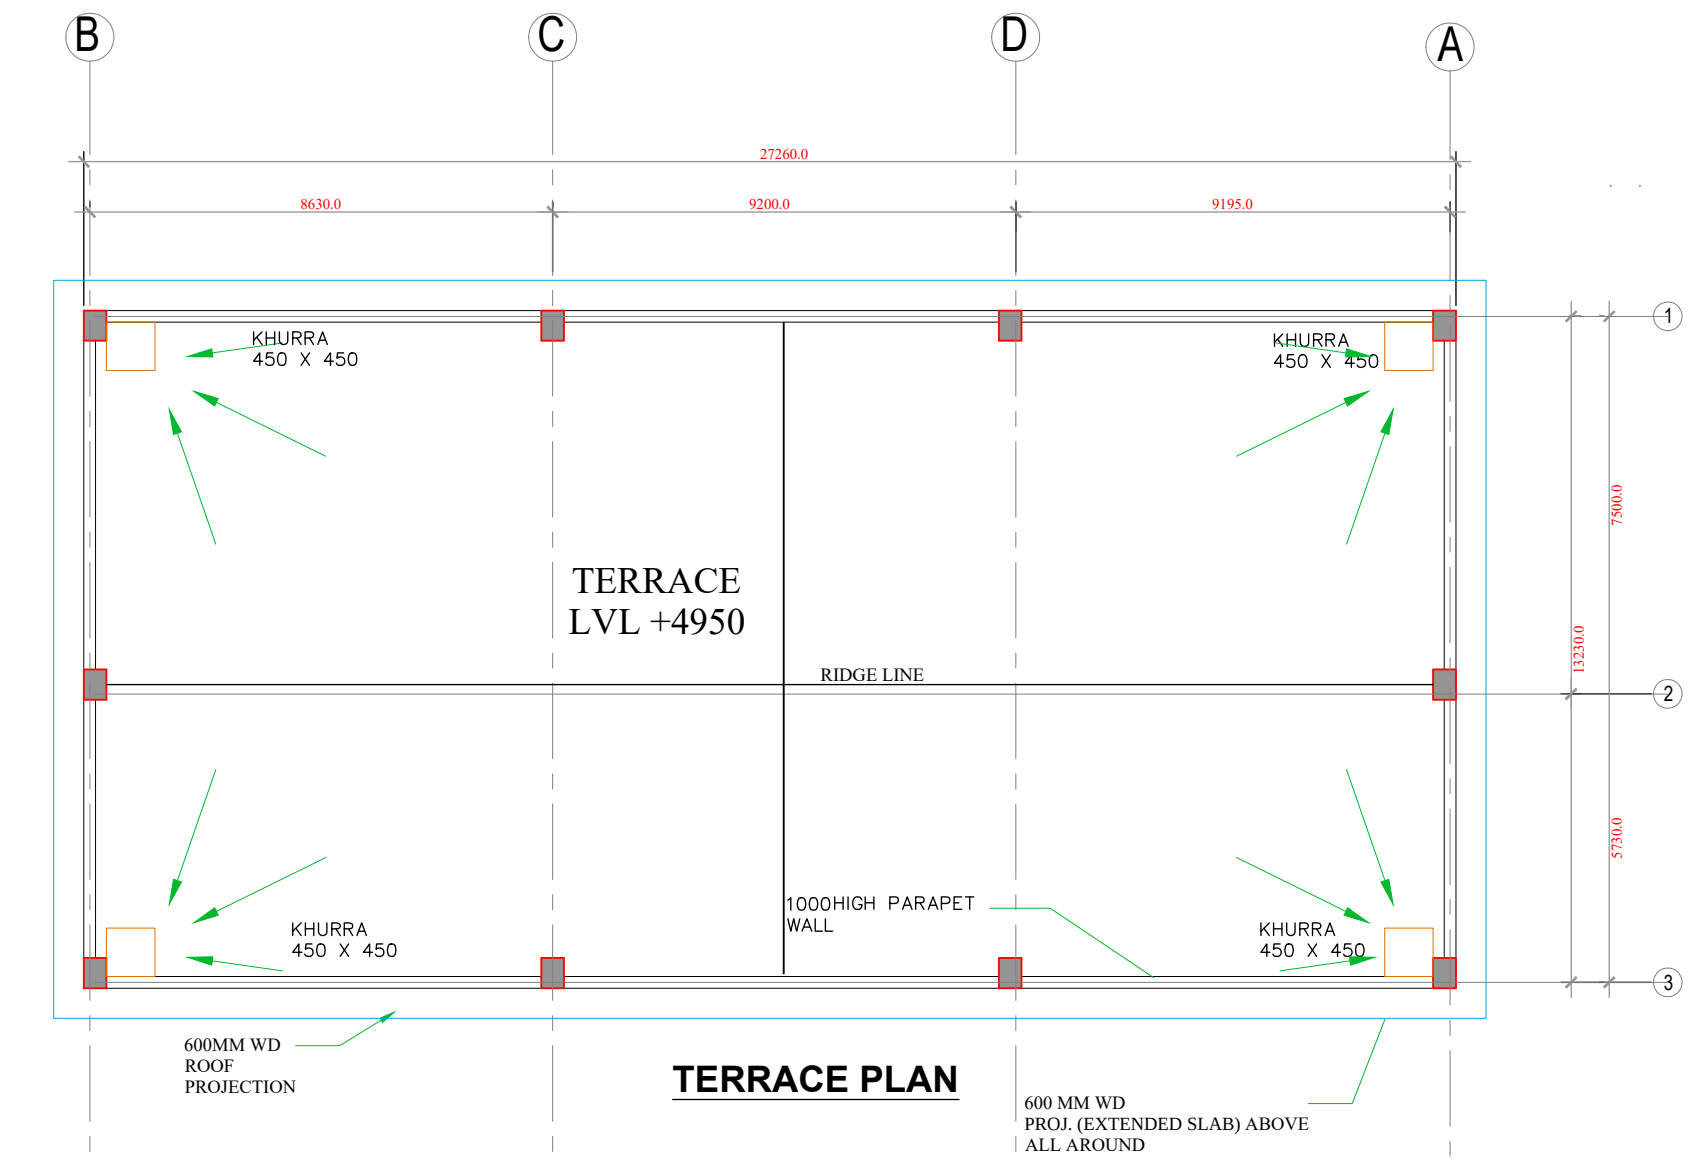


TERRACE PLAN

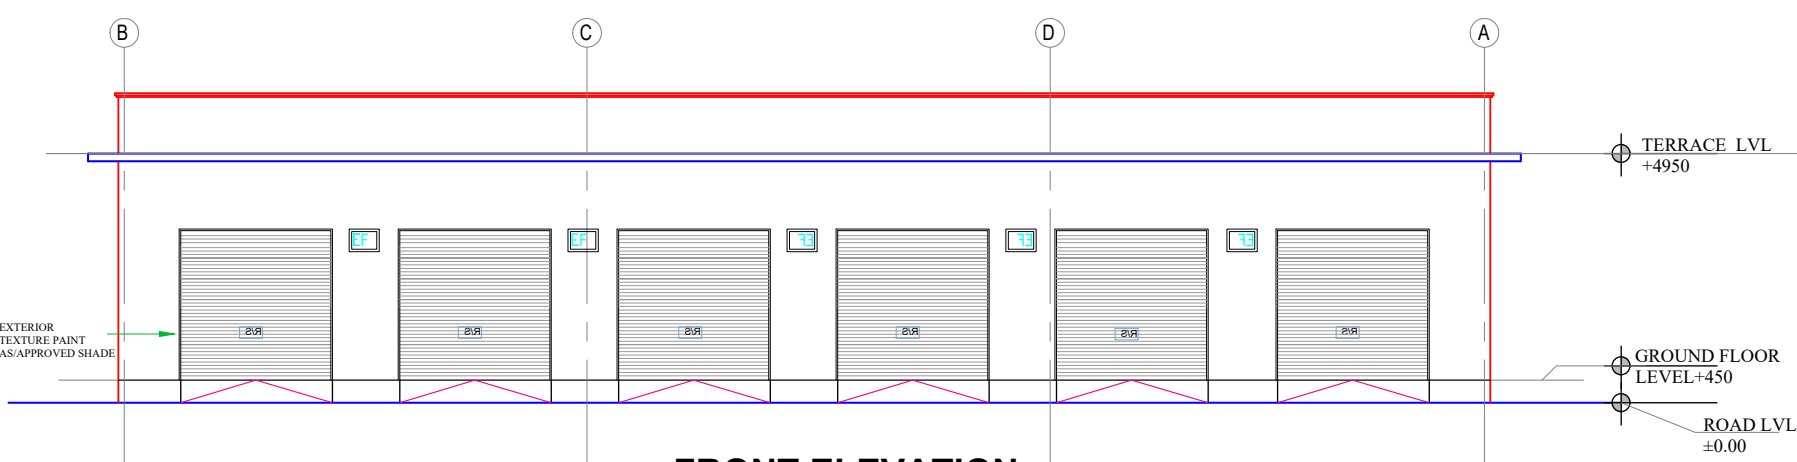


FRONT ELEVATION

DOOR/WINDOW SCHEDULE						
S.NO	TYPE	SIZE	SILL LVL.	LINTEL	REMARKS	LOCATIONS
1.	D1	1000X2100	-	2100	STEEL DOOR	ENTRY
2.	RS	3000X3500	-	3500	ROLLING SHUTTER INCLUDING 500MM HIGH GRILL IN-PLACE OF LATHS AS/SPECIFICATION	ENTRY
WINDOWS						
1.	W1	1500X1500	900	2400	ALUMINUM FRAME SLIDING TWO TRACK SYSTEM	ROOMS
2.	EF	600X450	2550	3000	EXHAUST FAN AS/DRAWING	ROOMS

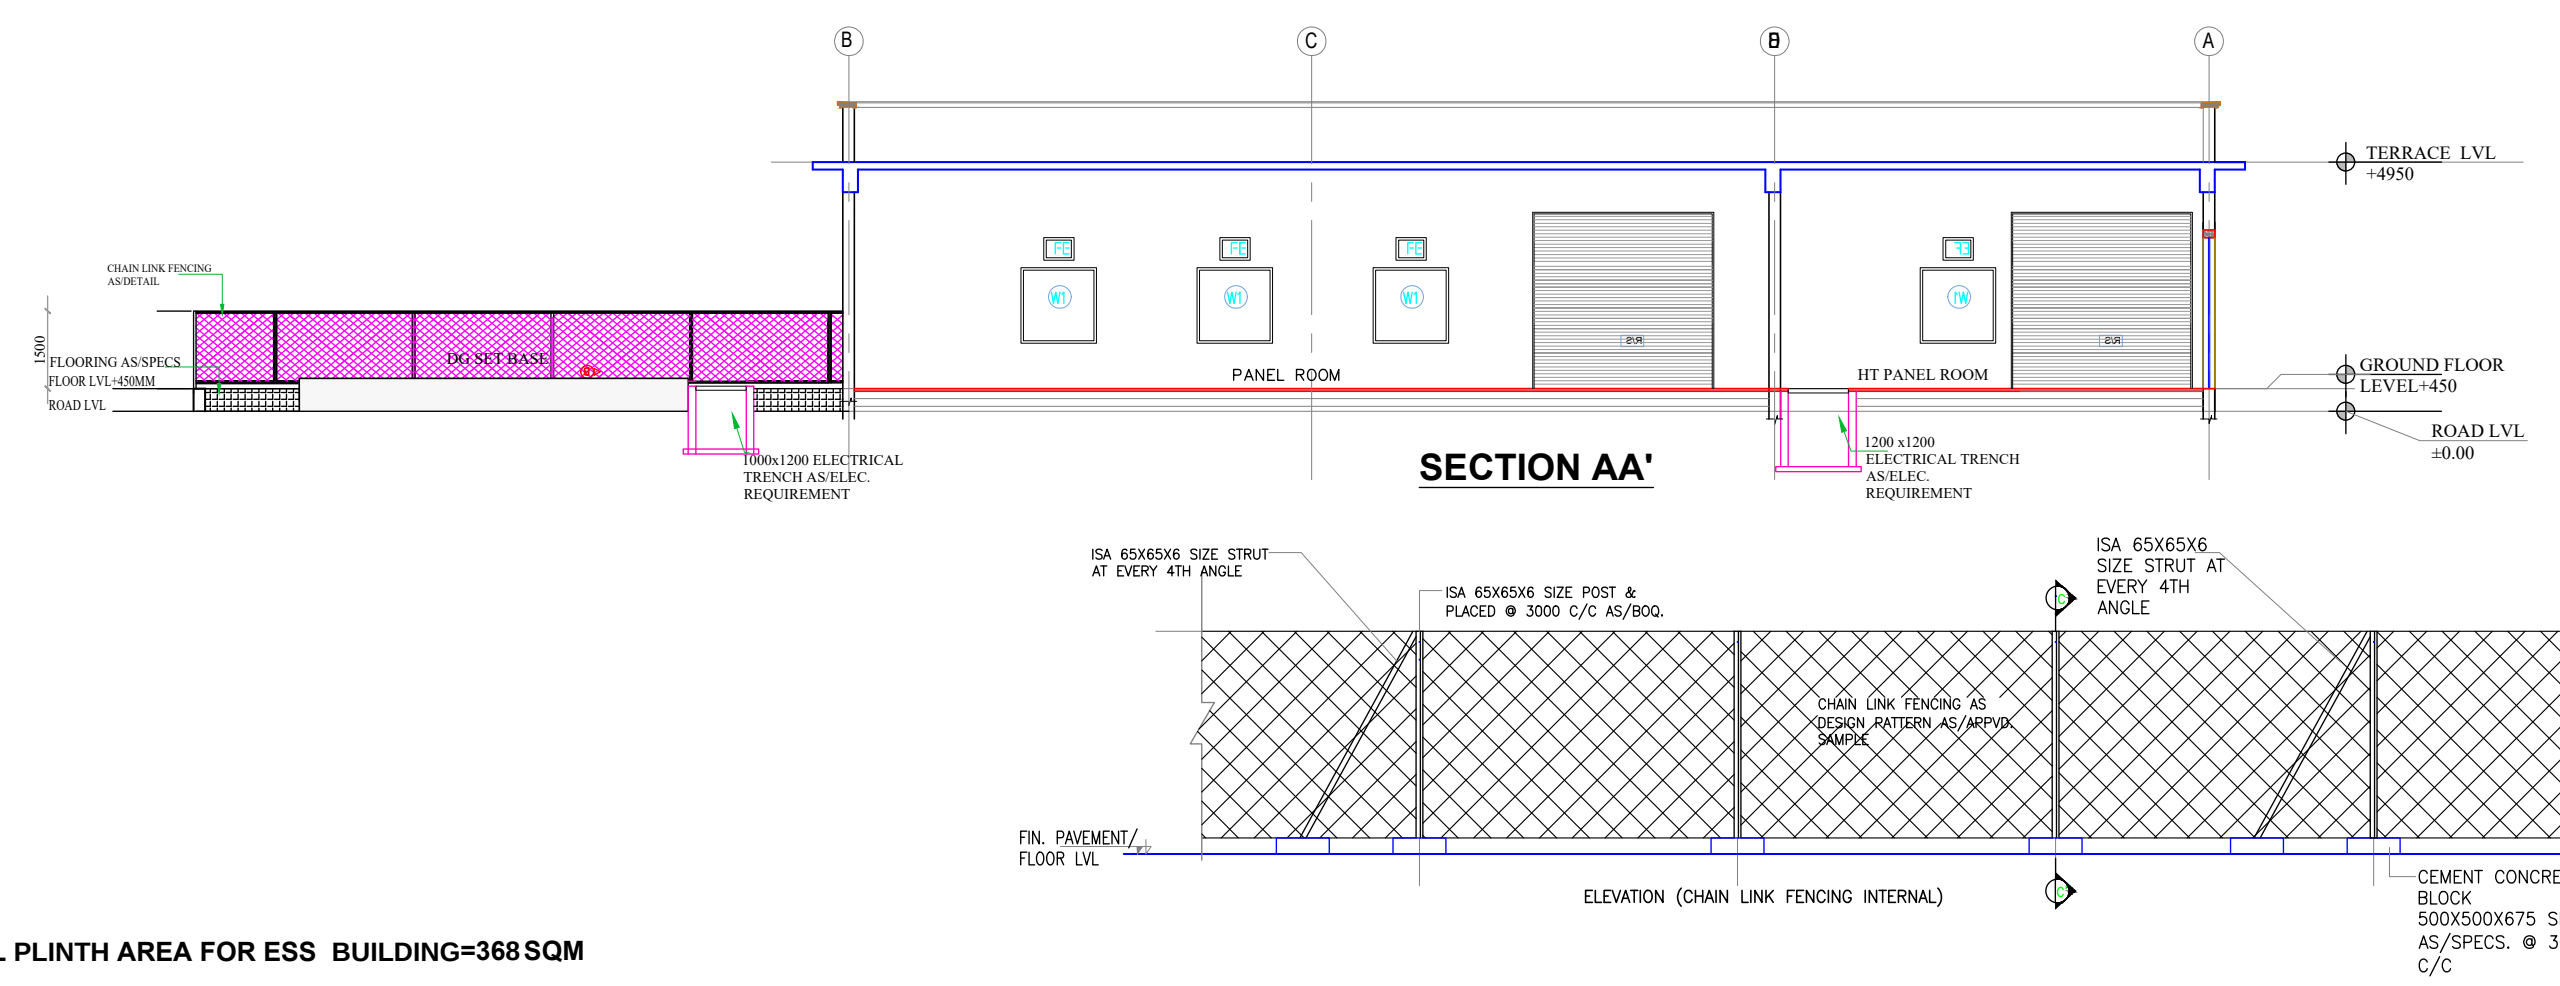

SECTION AA'

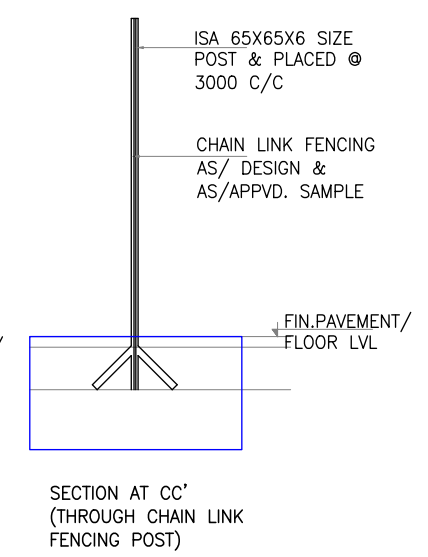



SECTION AT CC' (THROUGH CHAIN LINK FENCING POST)

TOTAL PLINTH AREA FOR ESS BUILDING=368SQM


- NOTES
- ALL DIMENSIONS ARE IN MM; UNLESS NOTED OTHERWISE.
 - WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
 - ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
 - THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.

TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	ESS BUILDING	
DRAWING TITLE	ESS BUILDING DETAILS	
DRG. NO.	MITES/BLD/AR/TD/060	
NORTH	SCALE	DATE
	NTS	JULY 2025

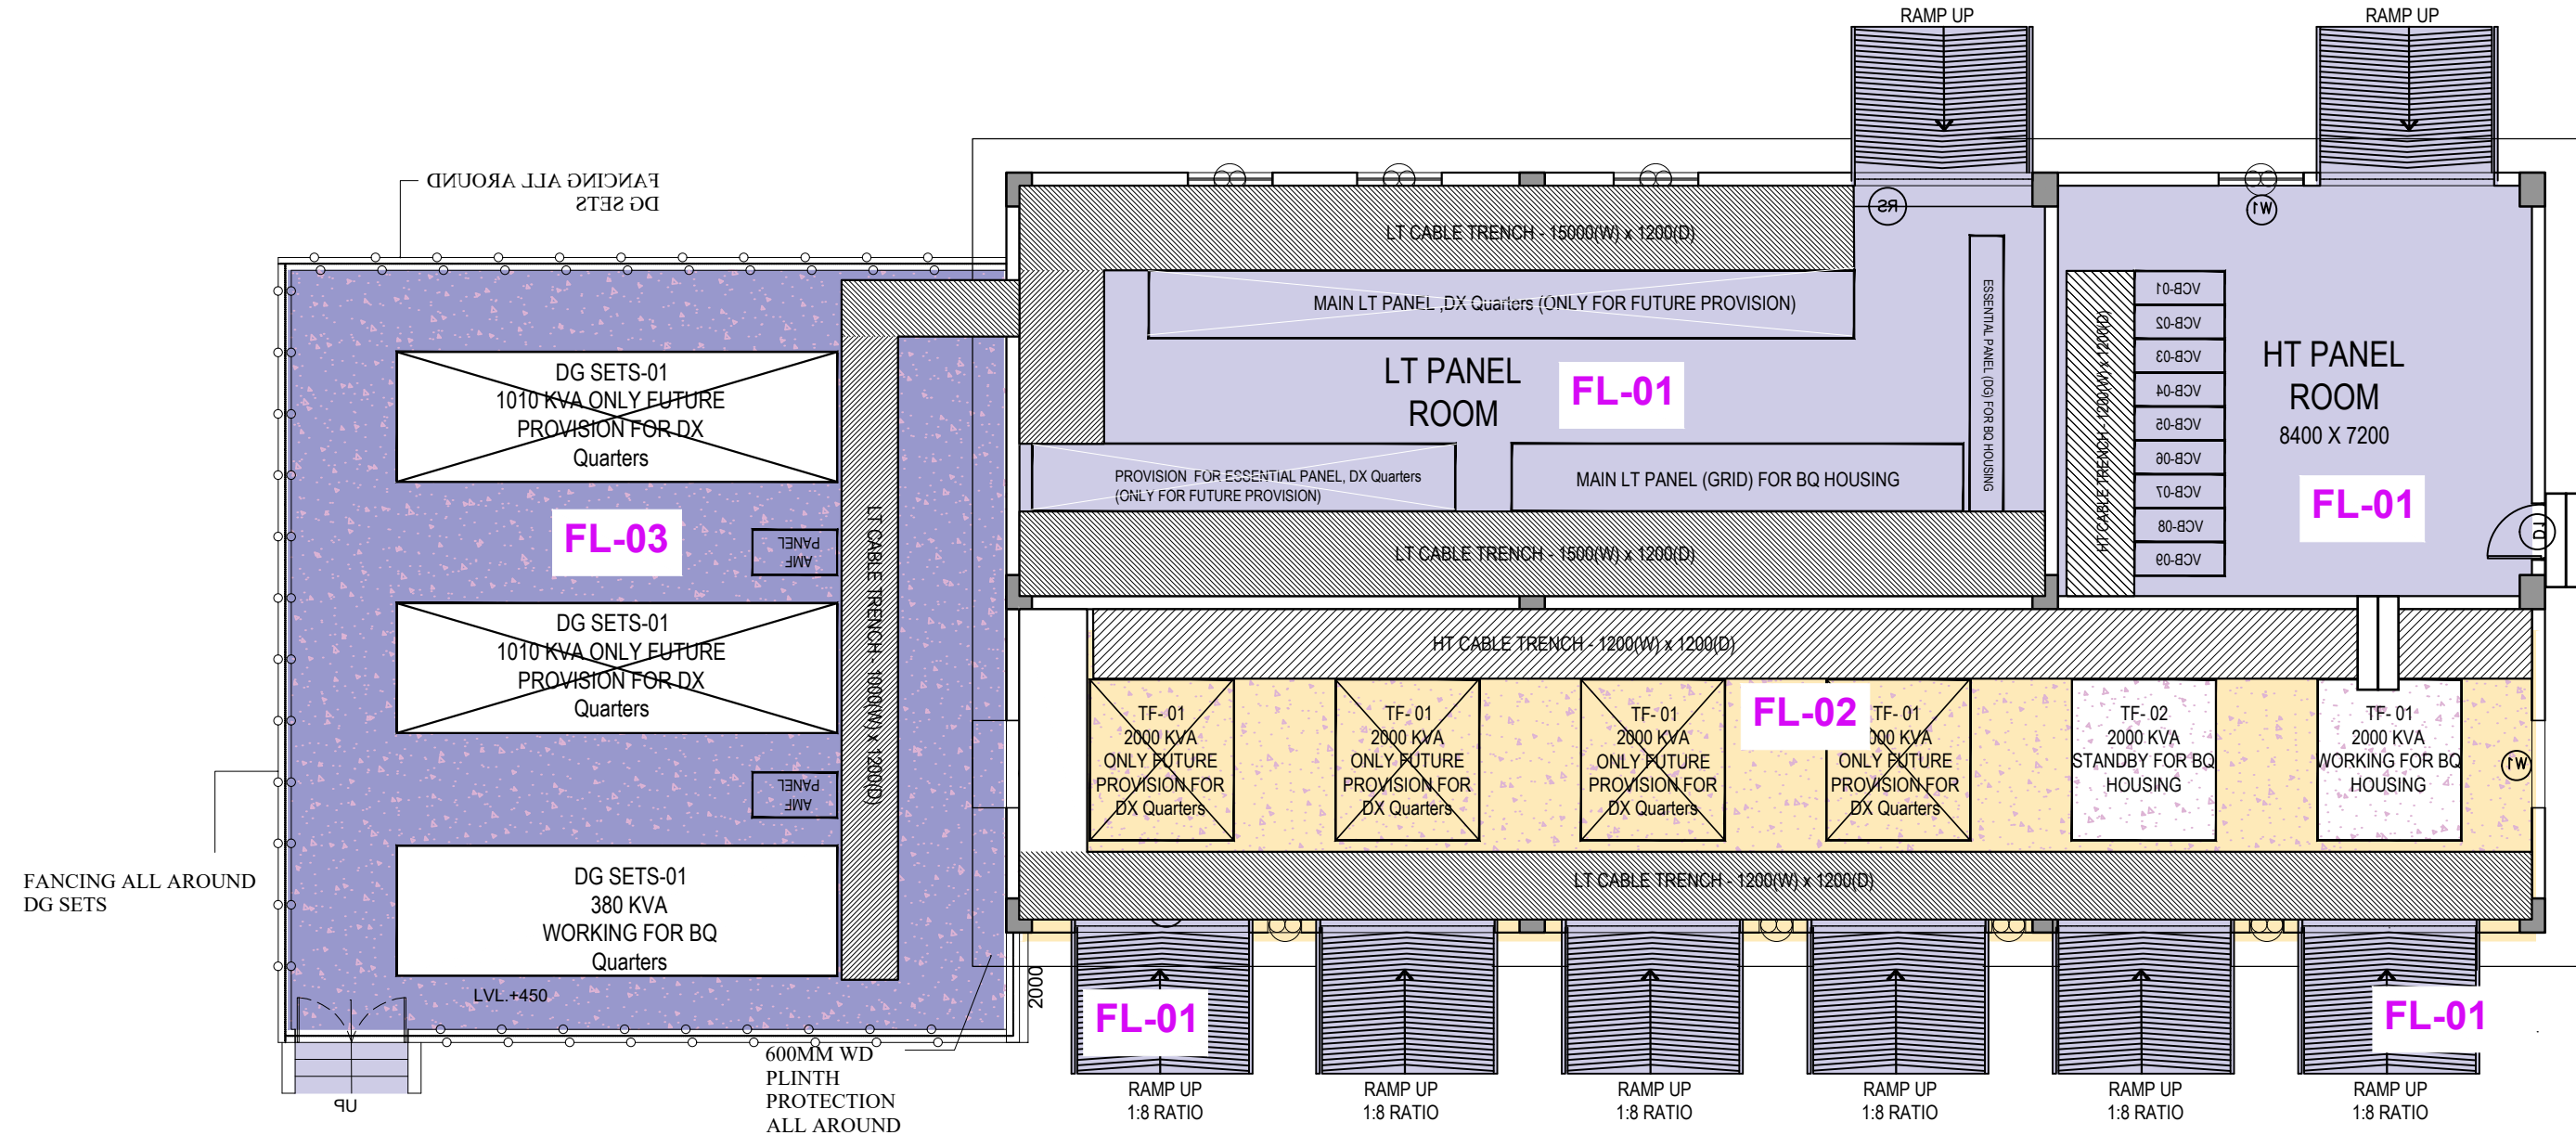


FLOOR PLAN

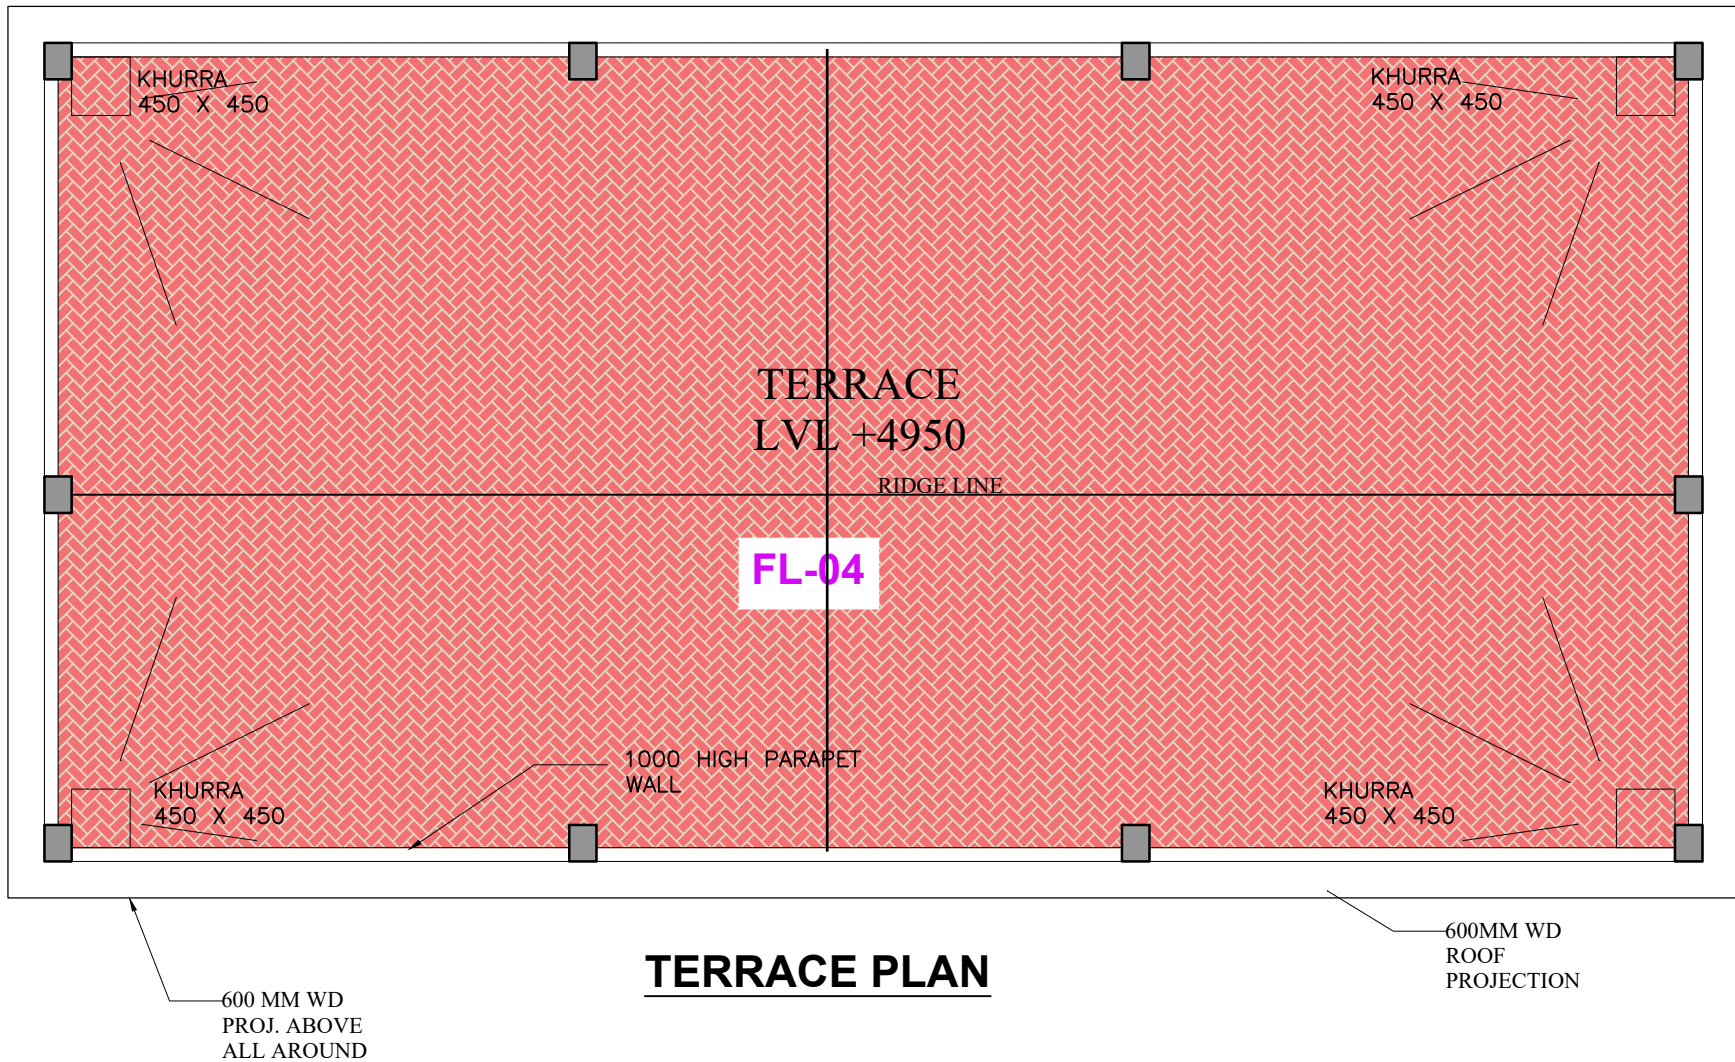

TERRACE PLAN

LEGEND FOR FLOORING				
S.NO.	HATCH SYMBOL	ICON	MATERIAL	AREA OF APPLICATION
01		FL-01	25MM THK. KOTA STONE	- HT PANEL ROOM - LT PANEL ROOM - ENTRY STEPS/RAMP
02		FL-02	62MM THICK CC FLOORING 1:2:4 WITH CONCRETE HARDENER TOPPING	TRANSFORMERS ROOM
03		FL-03	150MM THICK 1:2:4 CEMENT CONCRETE WITH FLOATING COAT OF NEAT CEMENT	AROUND DG SET AREA
04		FL-04	LIQUID RUBBER WATER PROOFING, LAYING CC 1:2:4 CONCRETE FOR ROOF GRADING, HEAT RESISTANT SRI TILES AS PER SPECIFICATIONS.	TERRACE
05	SKIRTING 100MM HIGH MATCHING THE FLOOR MATERIAL			

KEY PLAN

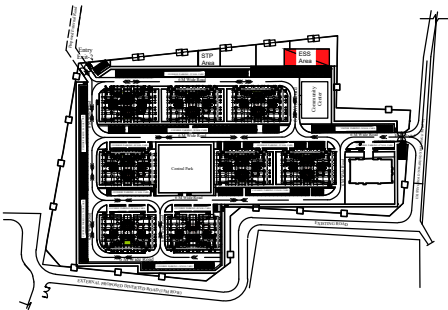


NOTES


- ALL DIMENSIONS ARE IN MM; UNLESS NOTED OTHERWISE.
- WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
- ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
- THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.
- THE FINISHED FLOOR LEVEL (FFL) SHALL BE MAINTAINED MINIMUM 50MM OR AS PER APPLICABLE CODES/SPECIFICATIONS/ SITE REQUIREMENTS ABOVE THE STRUCTURAL SLAB LEVEL OF ALL BUILDINGS. REFER TENDER DOCUMENT FOR DETAILS.

TENDER DRAWING


CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	ELECTRIC SUB-STATION BUILDING	
DRAWING TITLE	FLOORING DETAIL	
DRG. NO.	RITES/BLD/AR/TD/061	
NORTH	SCALE	DATE
	NTS	JULY 2025

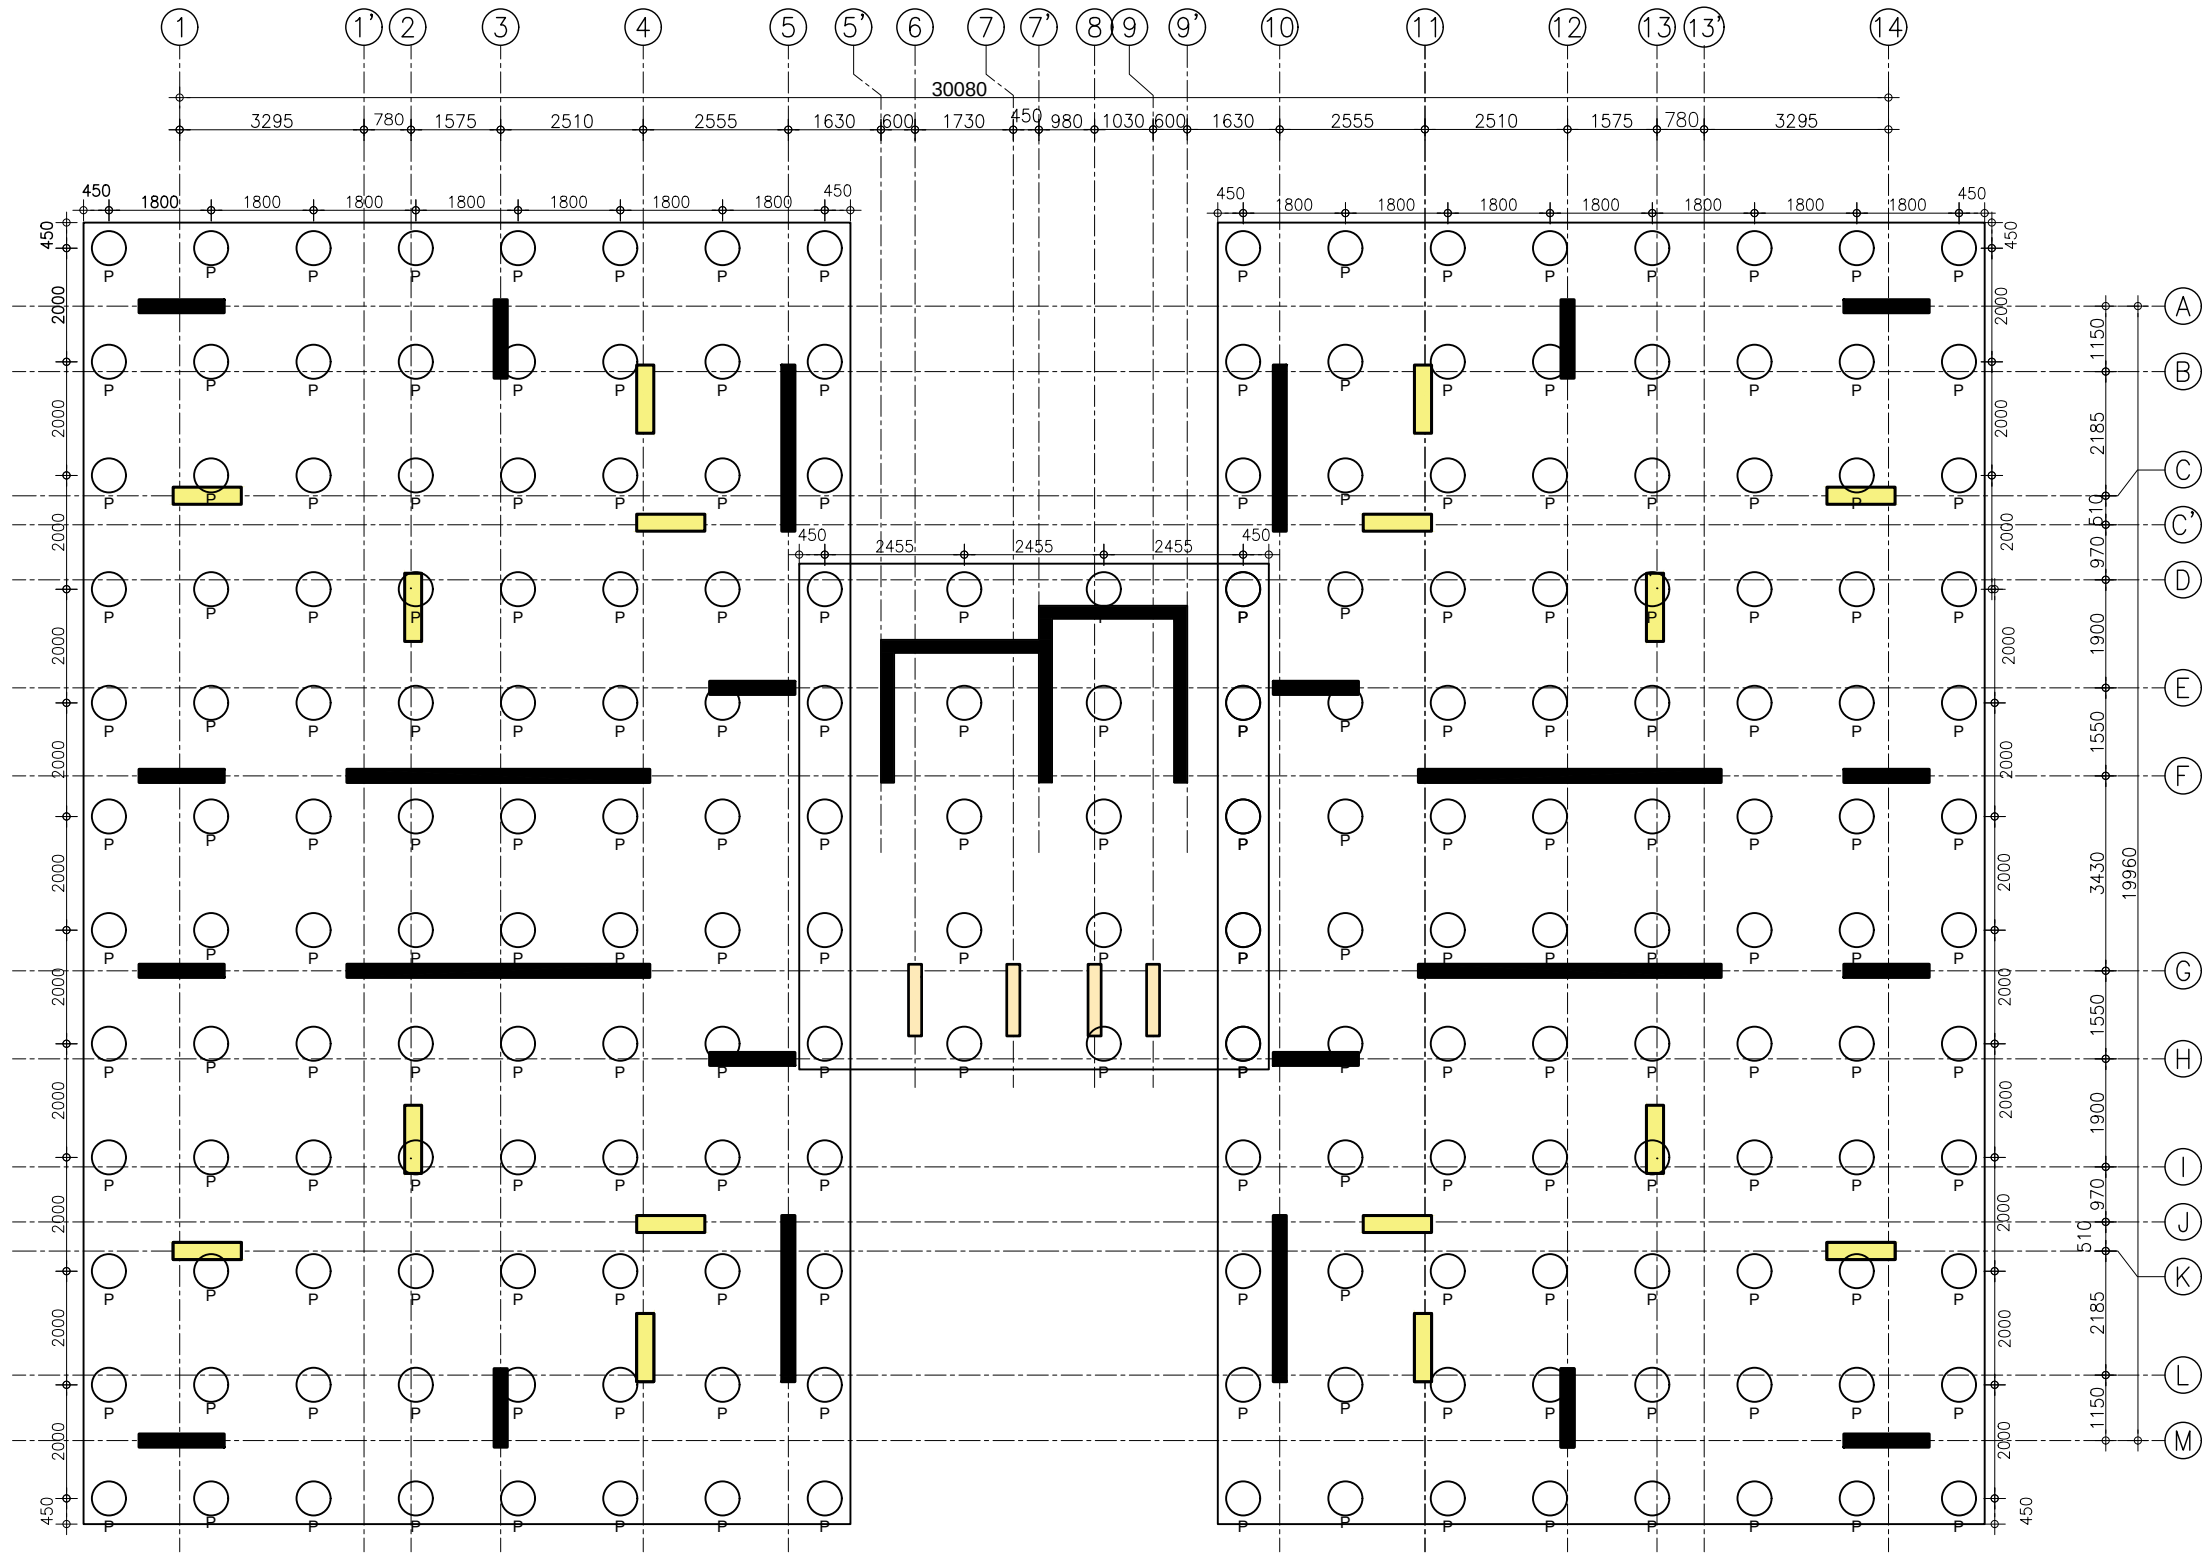

*P: PILE

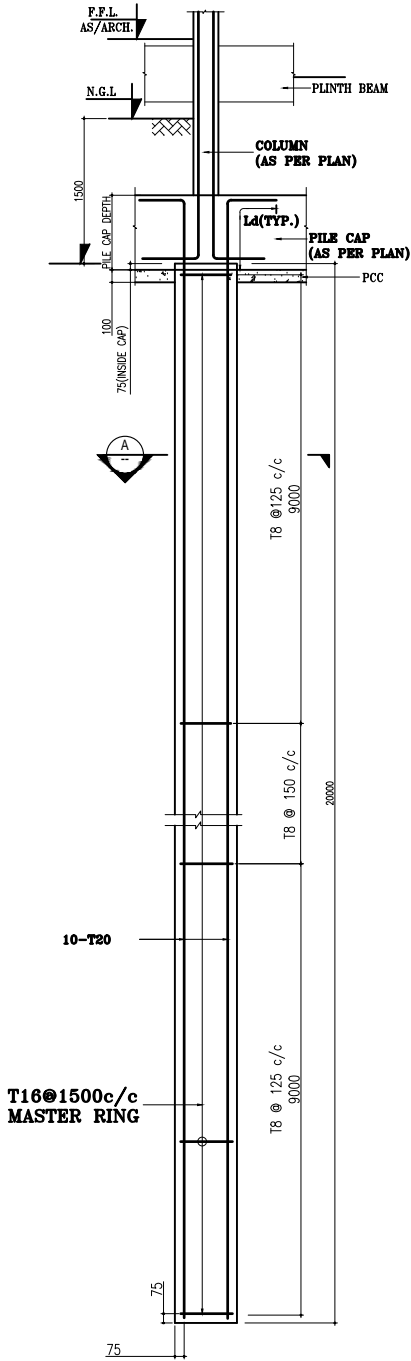


TYPICAL ELEVATION OF PILE (600MM DIA)



- NOTES:-**
1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
 2. THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
 3. DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
 4. WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
 5. REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
 6. REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
 7. ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
 8. LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d_{dia} OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
 9. CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
 10. ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
 11. CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
 12. THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
 13. PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
 14. CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
 15. THE BUILDING HAS BEEN DESIGNED FOR G+6. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
 16. FOR 600# RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY 68T/PILE, HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT. SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.

TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	HOUSING BUILDING (G+6)	
DRAWING TITLE	PILE LAYOUT PLAN	
DRG. NO.	MITES/BLD/STR/TD/HOUSING(G+6)/100	
NORTH	SCALE	DATE
	NTS	JULY 2025

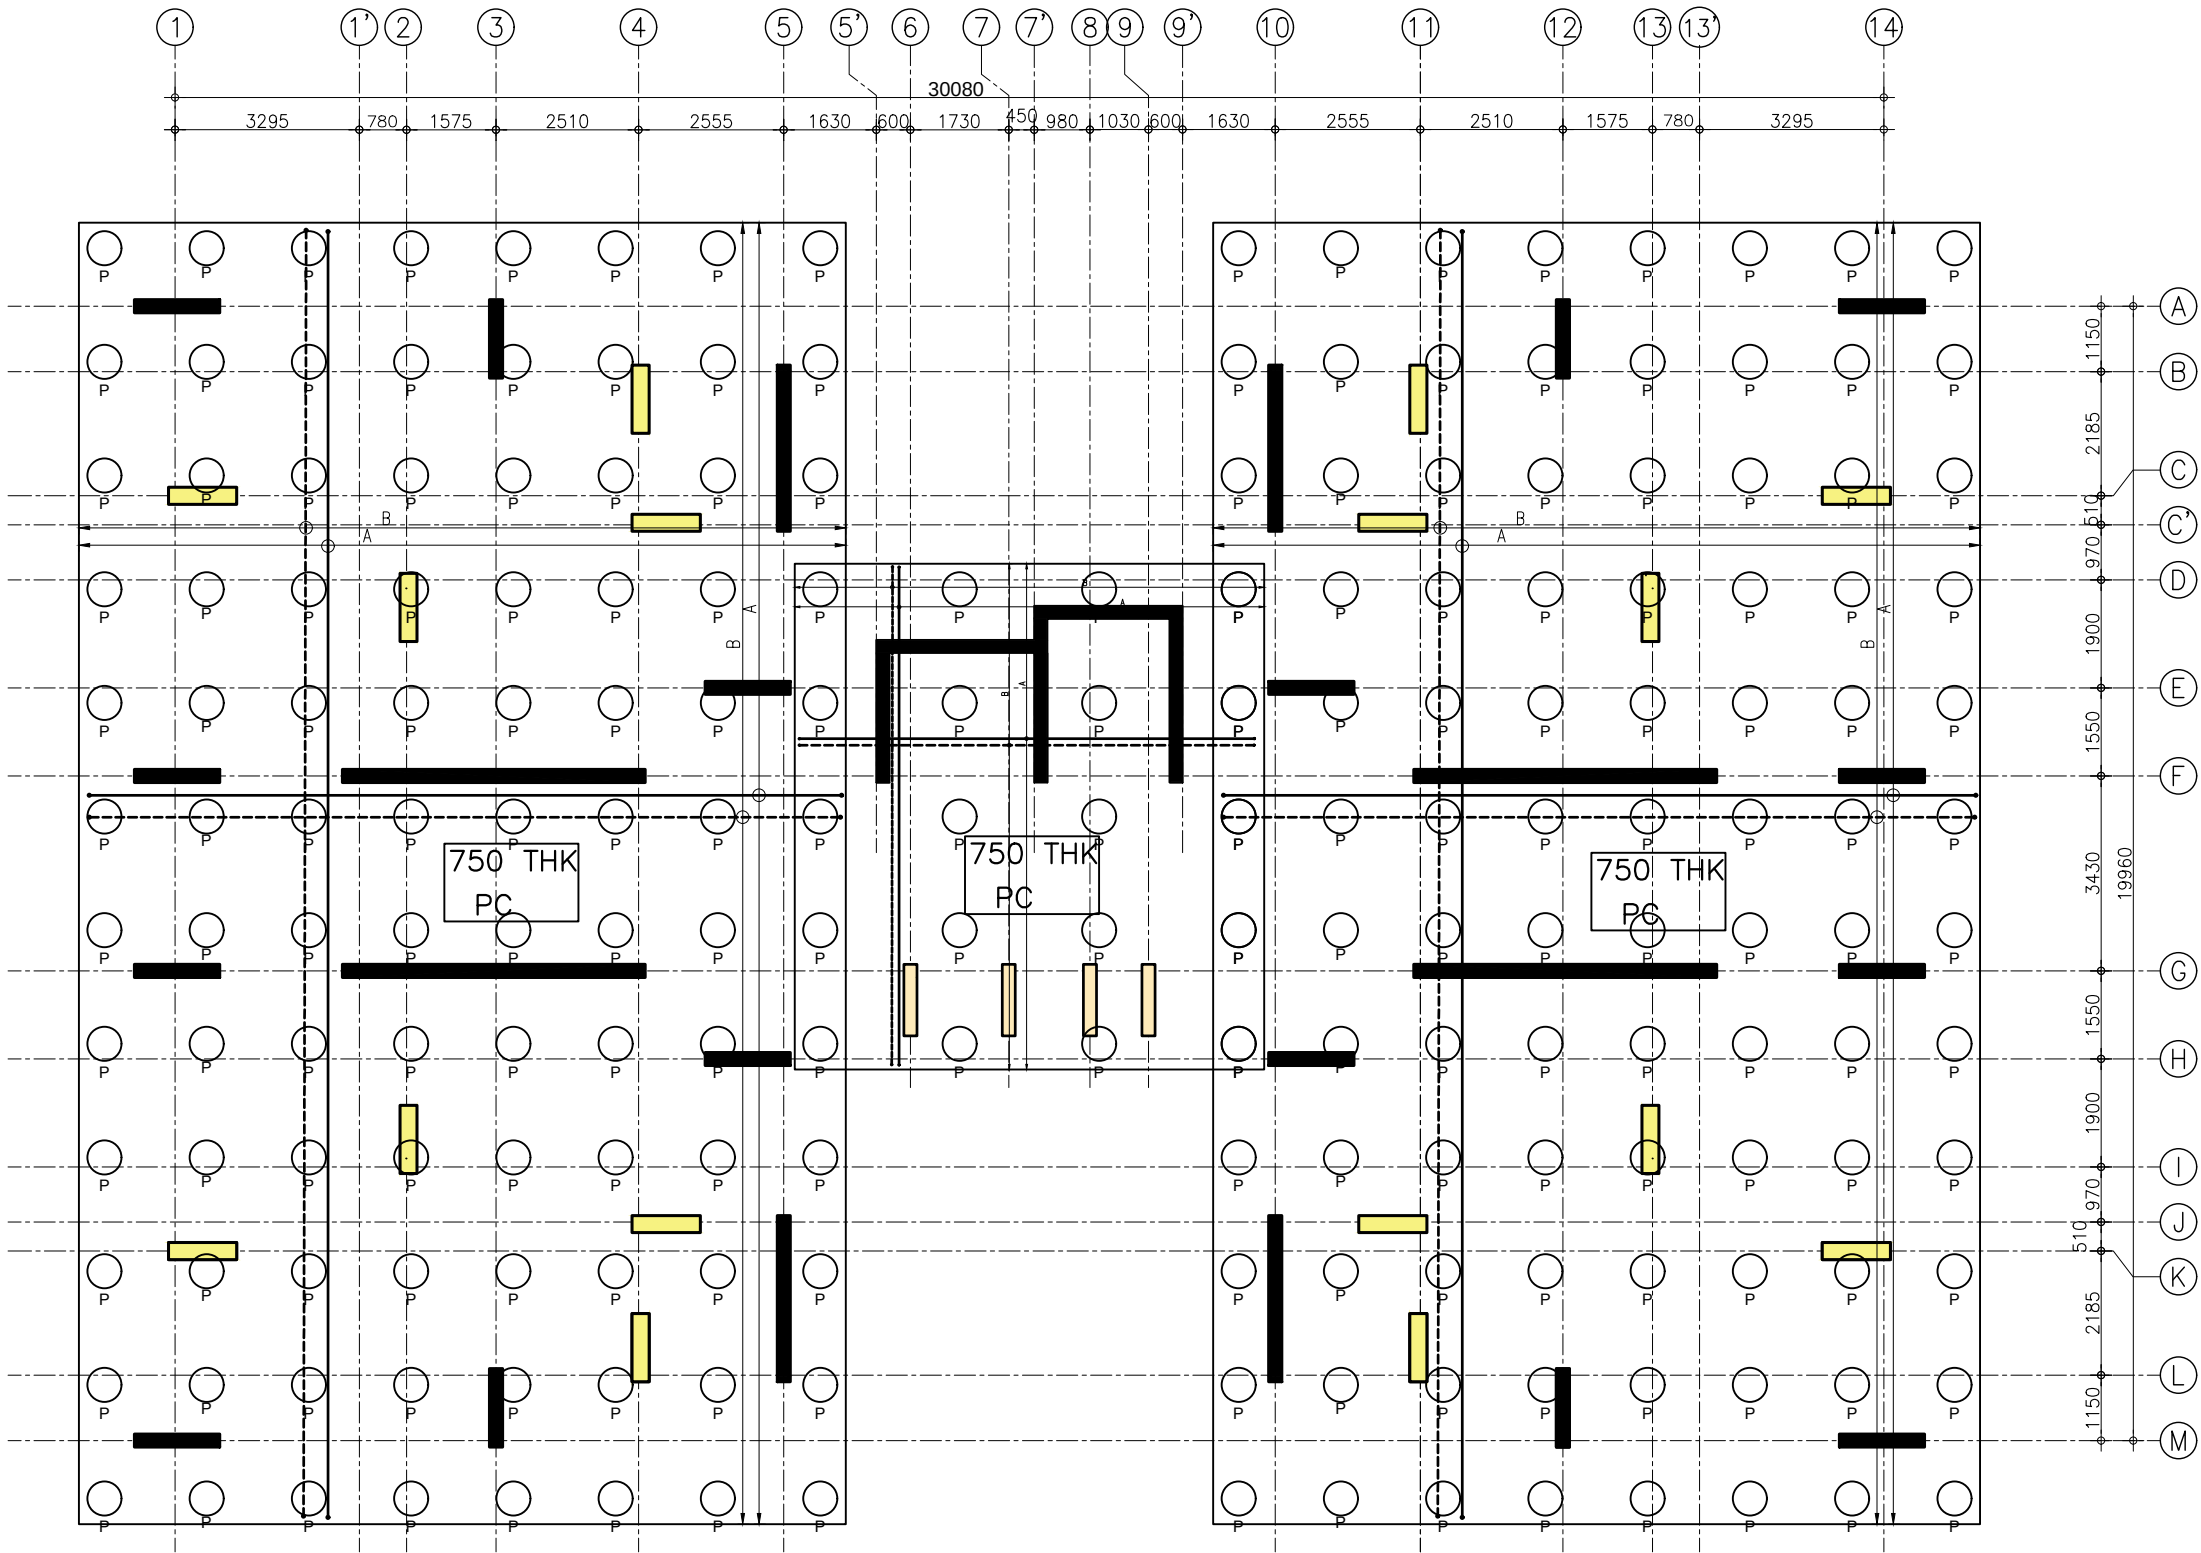

*P: PILE

PILE CAP LAYOUT PLAN

TOP BARS SHOWN AS
BOTTOM BARS SHOWN AS
ALL DISTRIBUTION STEEL SHALL BE T16 @100c/c
WHEREVER REQUIRED

PILECAP BOTTOM REINFORCEMENT SCHEDULE

BAR MARKED	DIA & SPACING
A	T25@100c/c(THROUGH)


PILECAP TOP REINFORCEMENT SCHEDULE

BAR MARKED	DIA & SPACING
B	T25@150c/c(THROUGH)

- NOTES:-
- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
 - THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
 - DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
 - WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
 - REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
 - REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
 - ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
 - LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47Xdia OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
 - CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
 - ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
 - CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
 - THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
 - PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
 - CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
 - THE BUILDING HAS BEEN DESIGNED FOR G+6. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
 - FOR 600# RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY 68T/PILE, HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT. SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.


TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)
PROJECT	BQ WORKMEN HOUSING
BUILDING	HOUSING BUILDING (G+6)
DRAWING TITLE	PILE CAP LAYOUT PLAN AND REINFORCEMENT DETAILS
DRG. NO.	BITES/BLD/STR/TD/HOUSING(G+6)/101
NORTH	
SCALE	NTS
DATE	JULY 2025

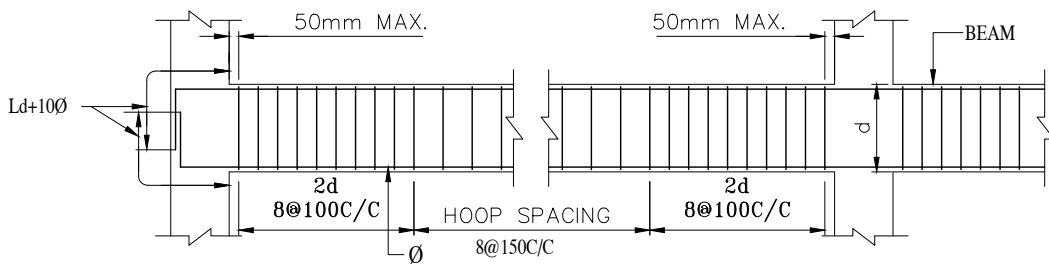


Ld=DEVELOPMENT LENGTH
d= DEPTH OF BEAM
Ø= DIAMETER OF BAR

TYPICAL BEAM SHEAR R/F DETAIL

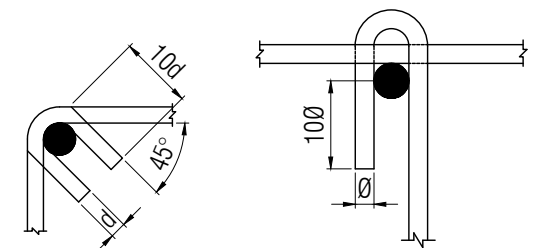


FOR 135° HOOK FOR 180° HOOK

TYPICAL HOOK DETAIL

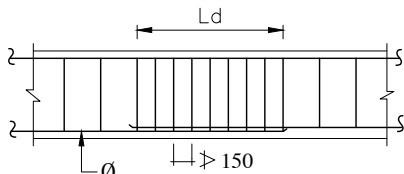


Ld = DEVELOPMENT
LENGTH IN TENSION
Ø = BAR DIAMETER

LAP DETAIL IN BEAM

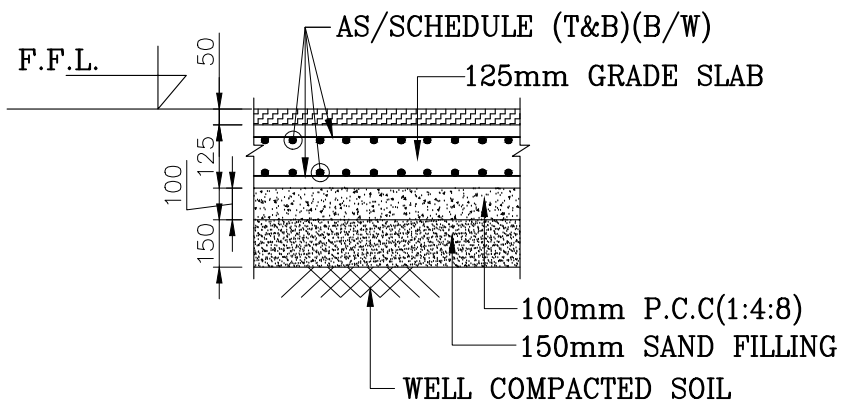

TYPICAL GRADE SLAB DETAIL

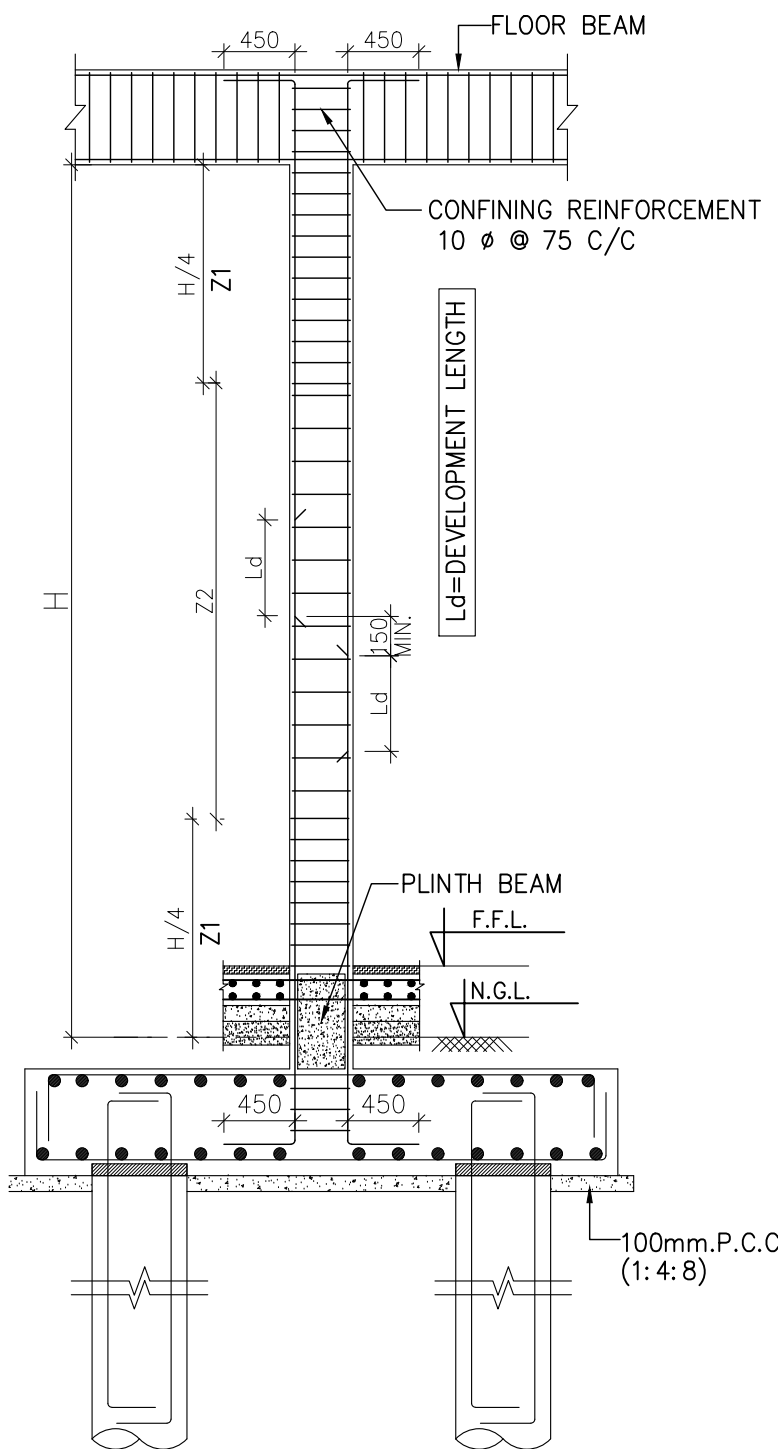






TYPICAL DETAILS FOR LAP
& RING SPACING IN COLUMN
DETAIL-A





IMPORTANT NOTE:-
1. SOIL SHOULD BE TESTED AT SITE FOR SBC/PILE LOAD CARRYING CAPACITY BEFORE THE COMMENCEMENT OF THE WORK.







- NOTES:-**
1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
 2. THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
 3. DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
 4. WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
 5. REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
 6. REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
 7. ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
 8. LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47Xdia OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
 9. CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM
RCC WALL - 30MM.
 10. ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
 11. CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
 12. THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
 13. PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
 14. CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONARY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
 15. THE BUILDING HAS BEEN DESIGNED FOR G+6. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
 16. FOR 600# RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY 68T, HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT.
 17. SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.

TENDER DRAWING		
CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	HOUSING BUILDING (G+6)	
DRAWING TITLE	TYPICAL DETAILS FOR PILE , COLUMN AND BEAM	
DRG. NO.	RITES/BLD/STR/TD/HOUSING(G+6)/102	
NORTH	SCALE	DATE
	NTS	JULY 2025

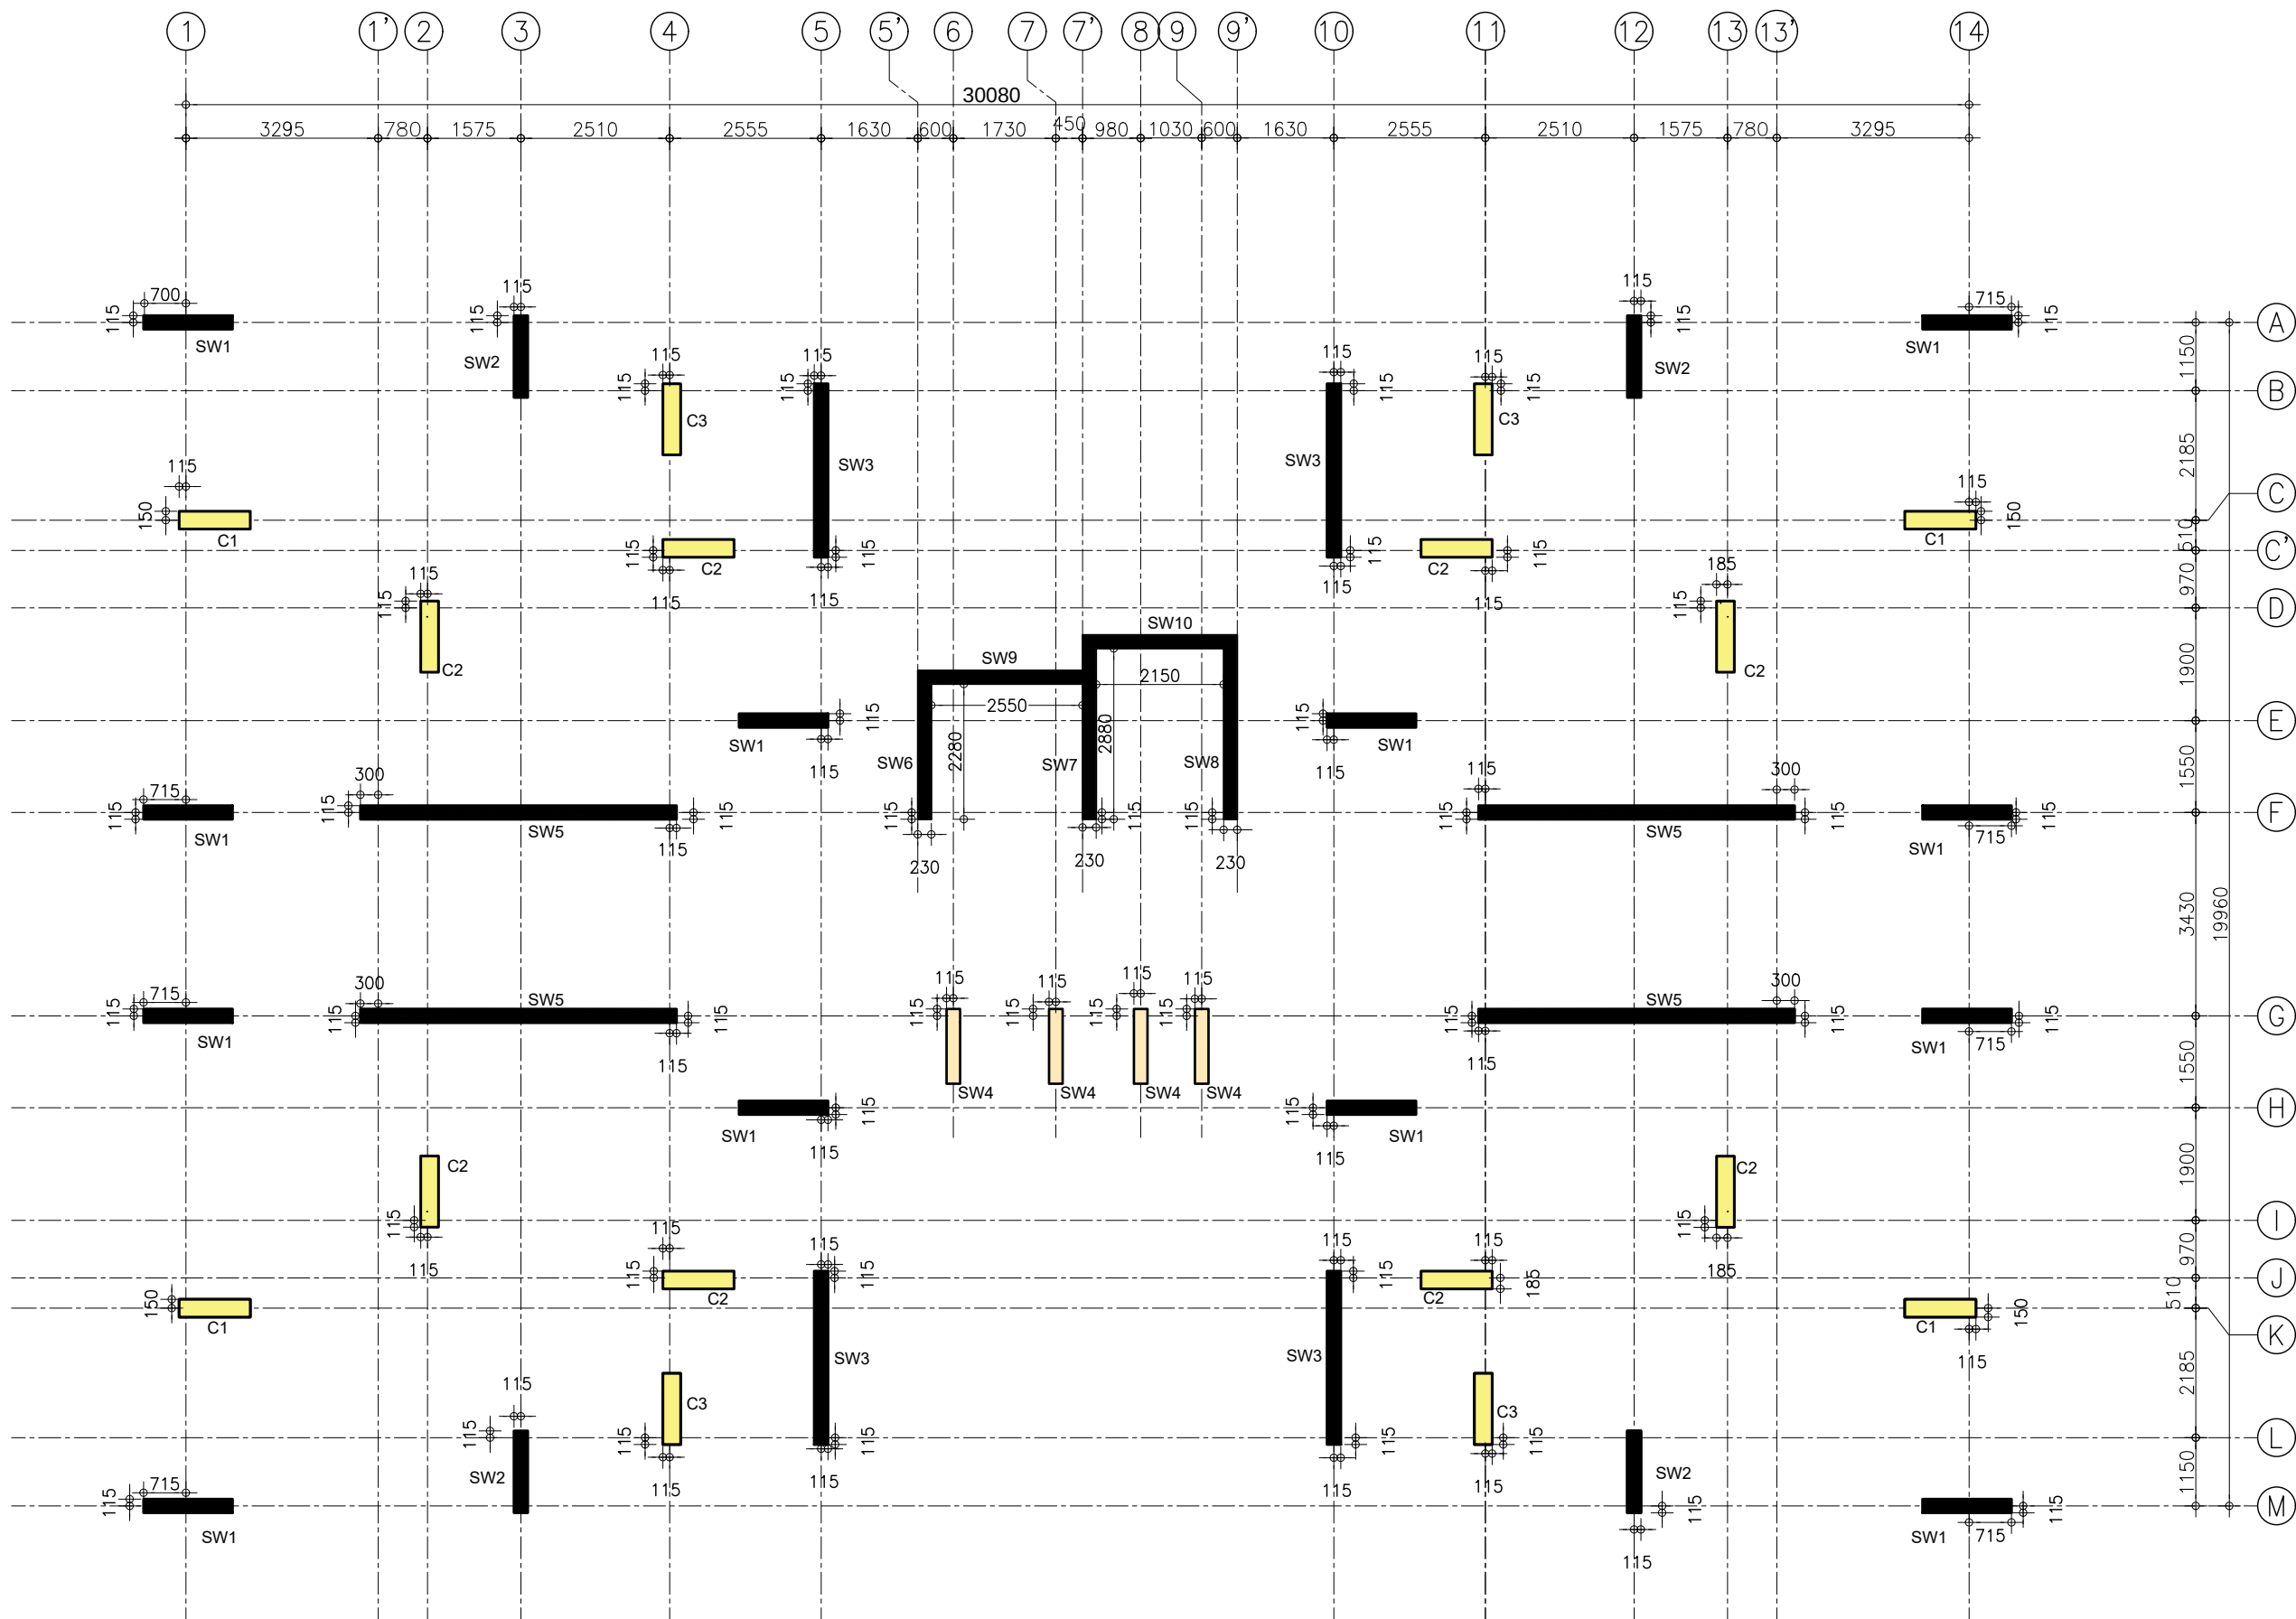

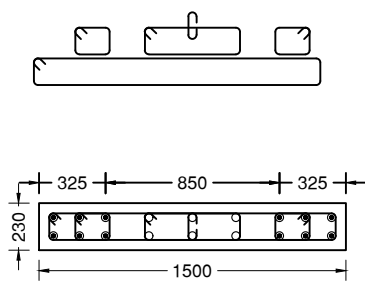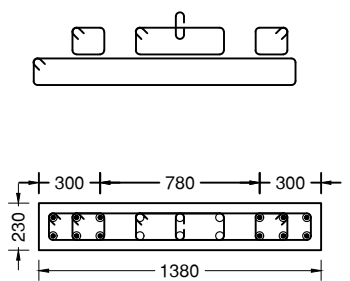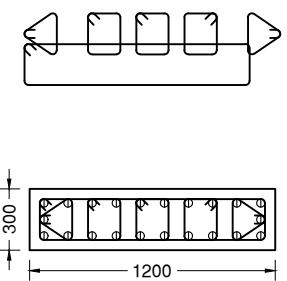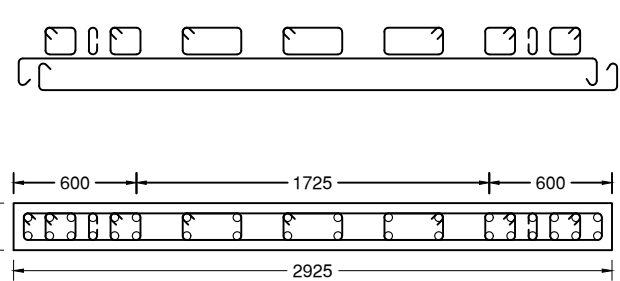FOUNDATION TO TERRACE				
	12-T16 + 6-T12	12-T16 + 6-T12	22-T20	24-T12 + 12-T12
COLUMN MARKED	SW1	SW2	C3	SW3

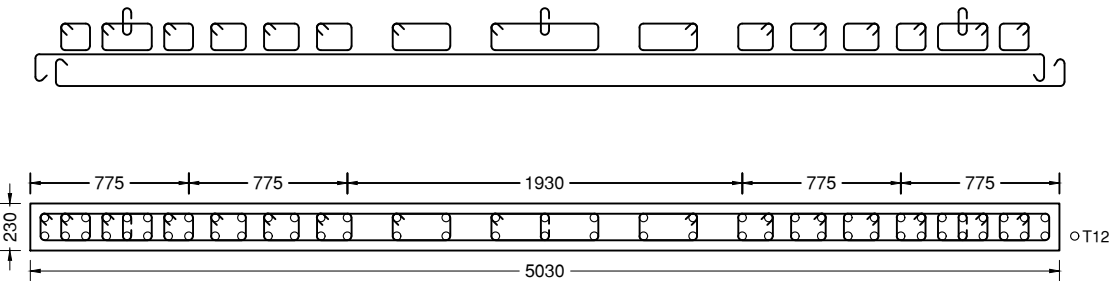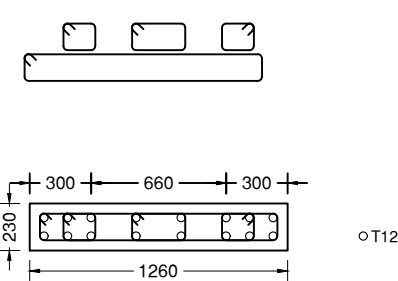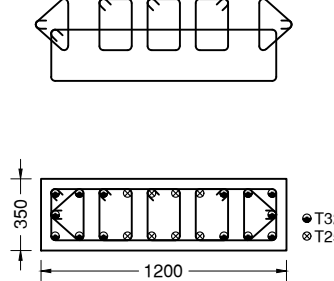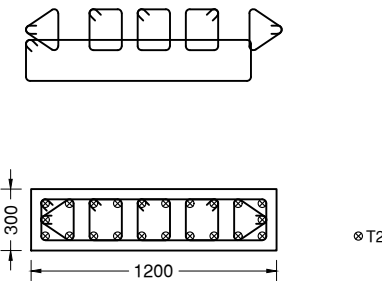			
32-T12 + 24-T12 + 14-T12	12-T12 + 4-T12	14-T32 + 8-T25	22-T25
SW5	SW4	C1	C2

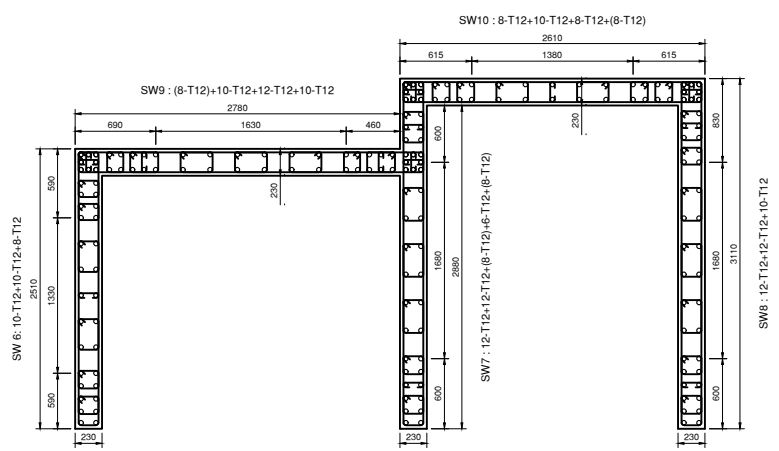FOUNDATION TO TERRACE			SW6
			SW8
			SW7
			SW9
			SW10
COMBINED WALL	CW1		

LATERAL TIES


ZONE	TIES SPECIFICATION
Z1	T10@75c/c
Z2	T10@150c/c

NOTES:-

- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
- THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
- DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
- WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
- REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
- REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
- ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
- LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47Xdia OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
- CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
- ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
- CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
- THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
- PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
- CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONARY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
- THE BUILDING HAS BEEN DESIGNED FOR G+6. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.

TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	HOUSING BUILDING (G+6)	
DRAWING TITLE	COLUMN REINFORCEMENT DETAILS	
DRG. NO.	RITES/BLD/STR/TD/HOUSING(G+6)/104	
NORTH	SCALE	DATE
	NTS	JULY 2025

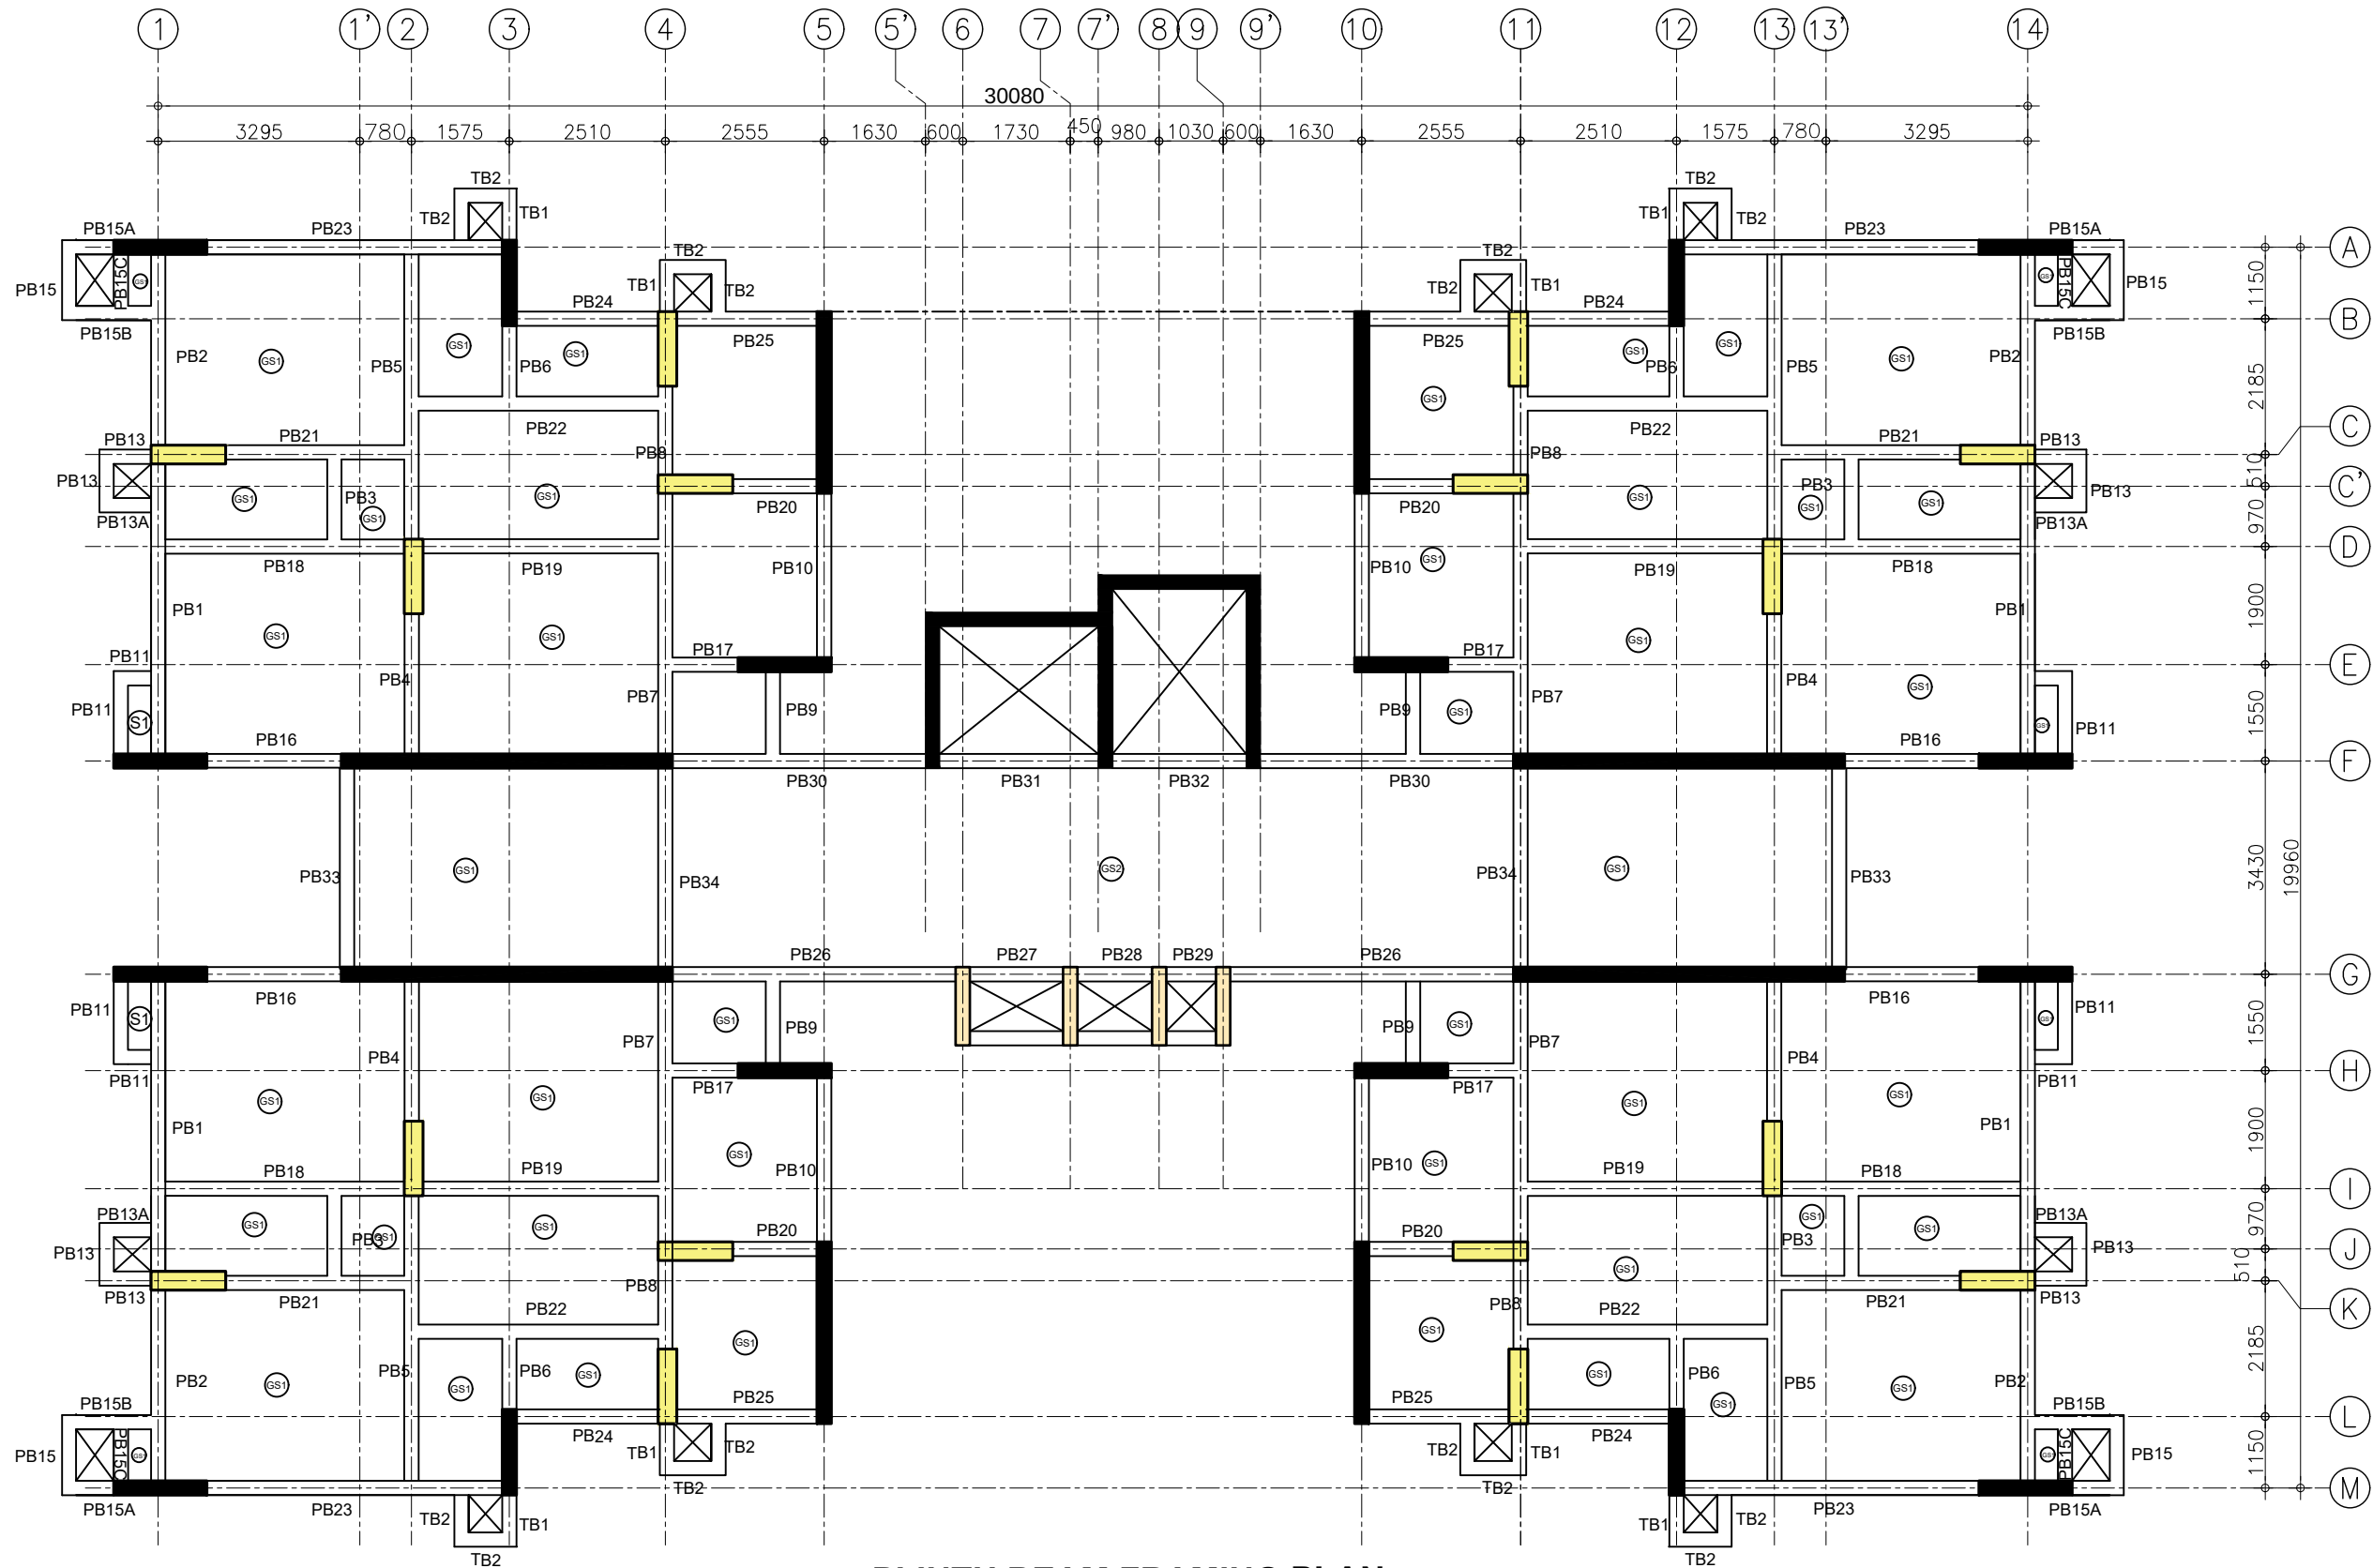

PLINTH BEAM FRAMING PLAN
(ALL BEAMS AT LVL. +300MM)


ROOF LVL. SLABS SCHEDULE DETAILS

S.NO	SLAB MARK	SLAB THICK	REINFORCEMENT			
			BOTTOM THRU BARS		TOP BARS	
			ALONG SHORT SPAN	ALONG LONG SPAN	ALONG SHORT SPAN	ALONG LONG SPAN
1.	GS1	125	8@125C/C	8@150C/C	8@125C/C	8@150C/C
2.	GS2	125	10@125C/C	10@150C/C	10@125C/C	10@150C/C

- NOTES:-
- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
 - THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
 - DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
 - WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
 - REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
 - REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
 - ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
 - LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d_{dia} OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
 - CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
 - ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
 - CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
 - THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
 - PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
 - CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
 - THE BUILDING HAS BEEN DESIGNED FOR G+6. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.

TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	HOUSING BUILDING (G+6)	
DRAWING TITLE	PLINTH BEAM LAYOUT PLAN	
DRG. NO.	RITES/BLD/STR/TD/HOUSING(G+6)/105	
NORTH	SCALE	DATE
	NTS	JULY 2025

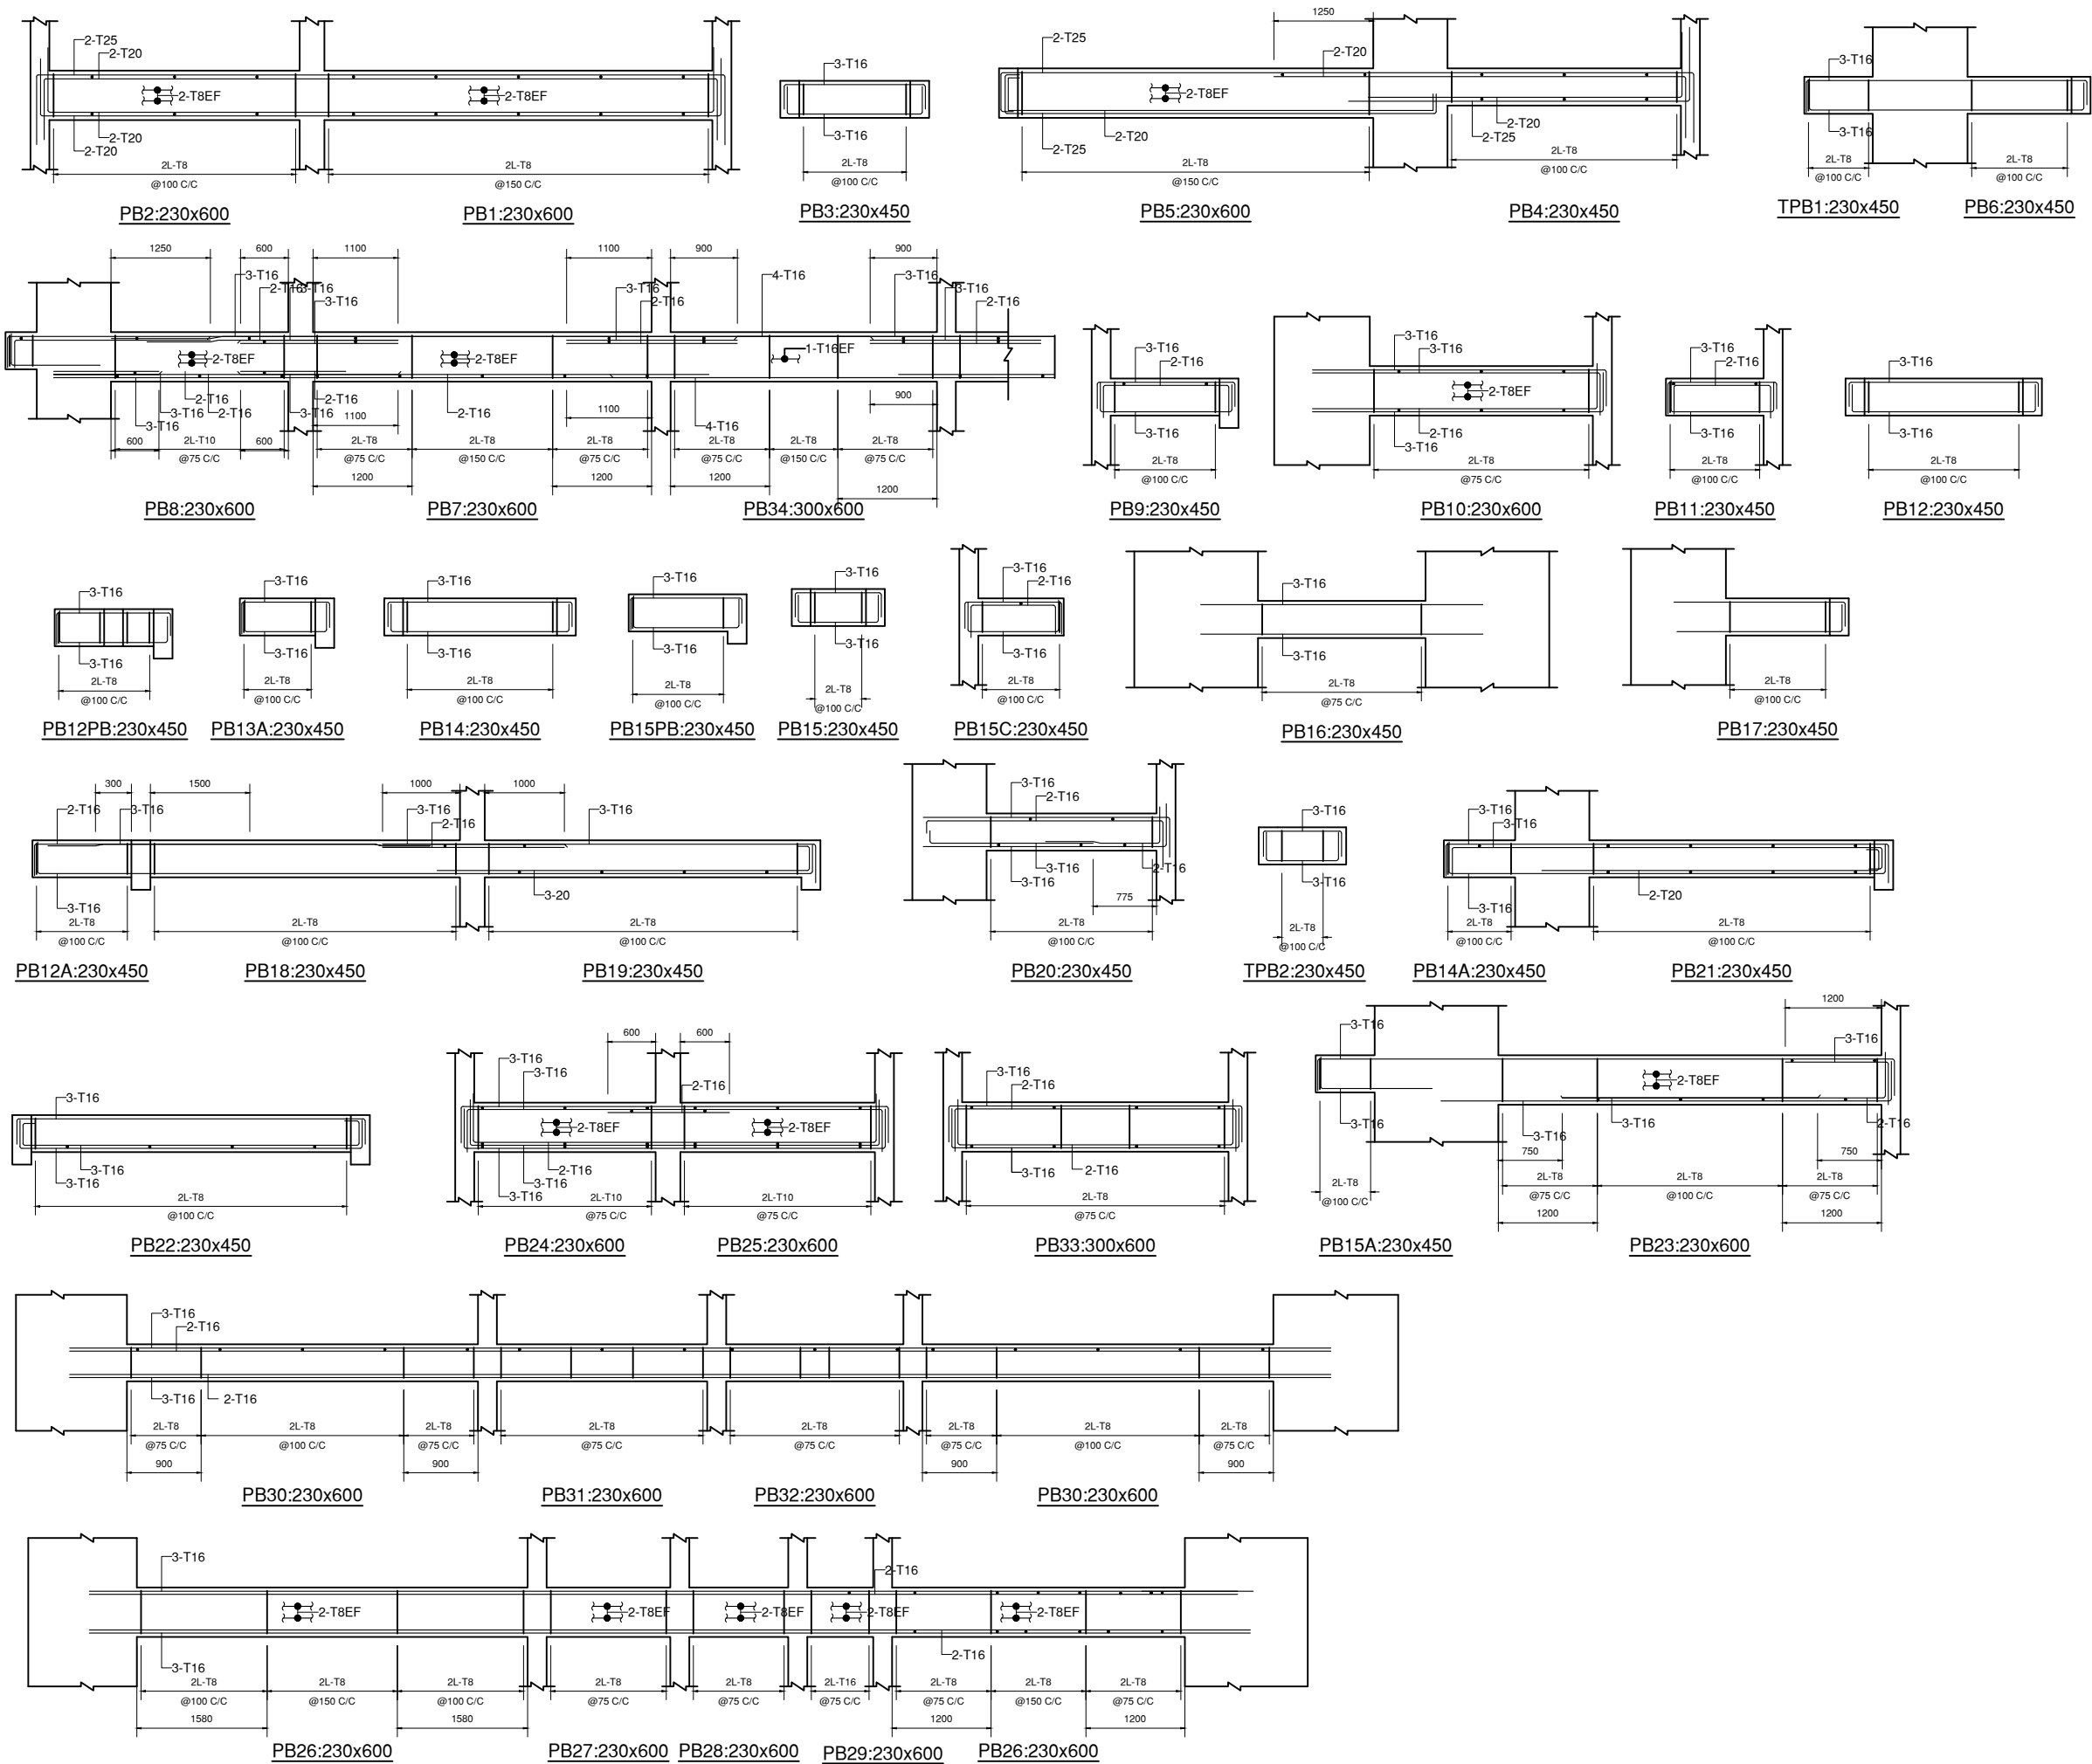


NOTES:-


1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
2. THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
3. DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
4. WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
5. REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
6. REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
7. ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
8. LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d_{dia} OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
9. CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
10. ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
11. CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
12. THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
13. PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
14. CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13820. ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
15. THE BUILDING HAS BEEN DESIGNED FOR G+6. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.

TENDER DRAWING


CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	HOUSING BUILDING (G+6)	
DRAWING TITLE	PLINTH BEAM REINFORCEMENT DETAILS	
DRG. NO.	MITES/BLD/STR/TD/HOUSING(G+6)/106	
NORTH	SCALE	DATE
	NTS	JULY 2025

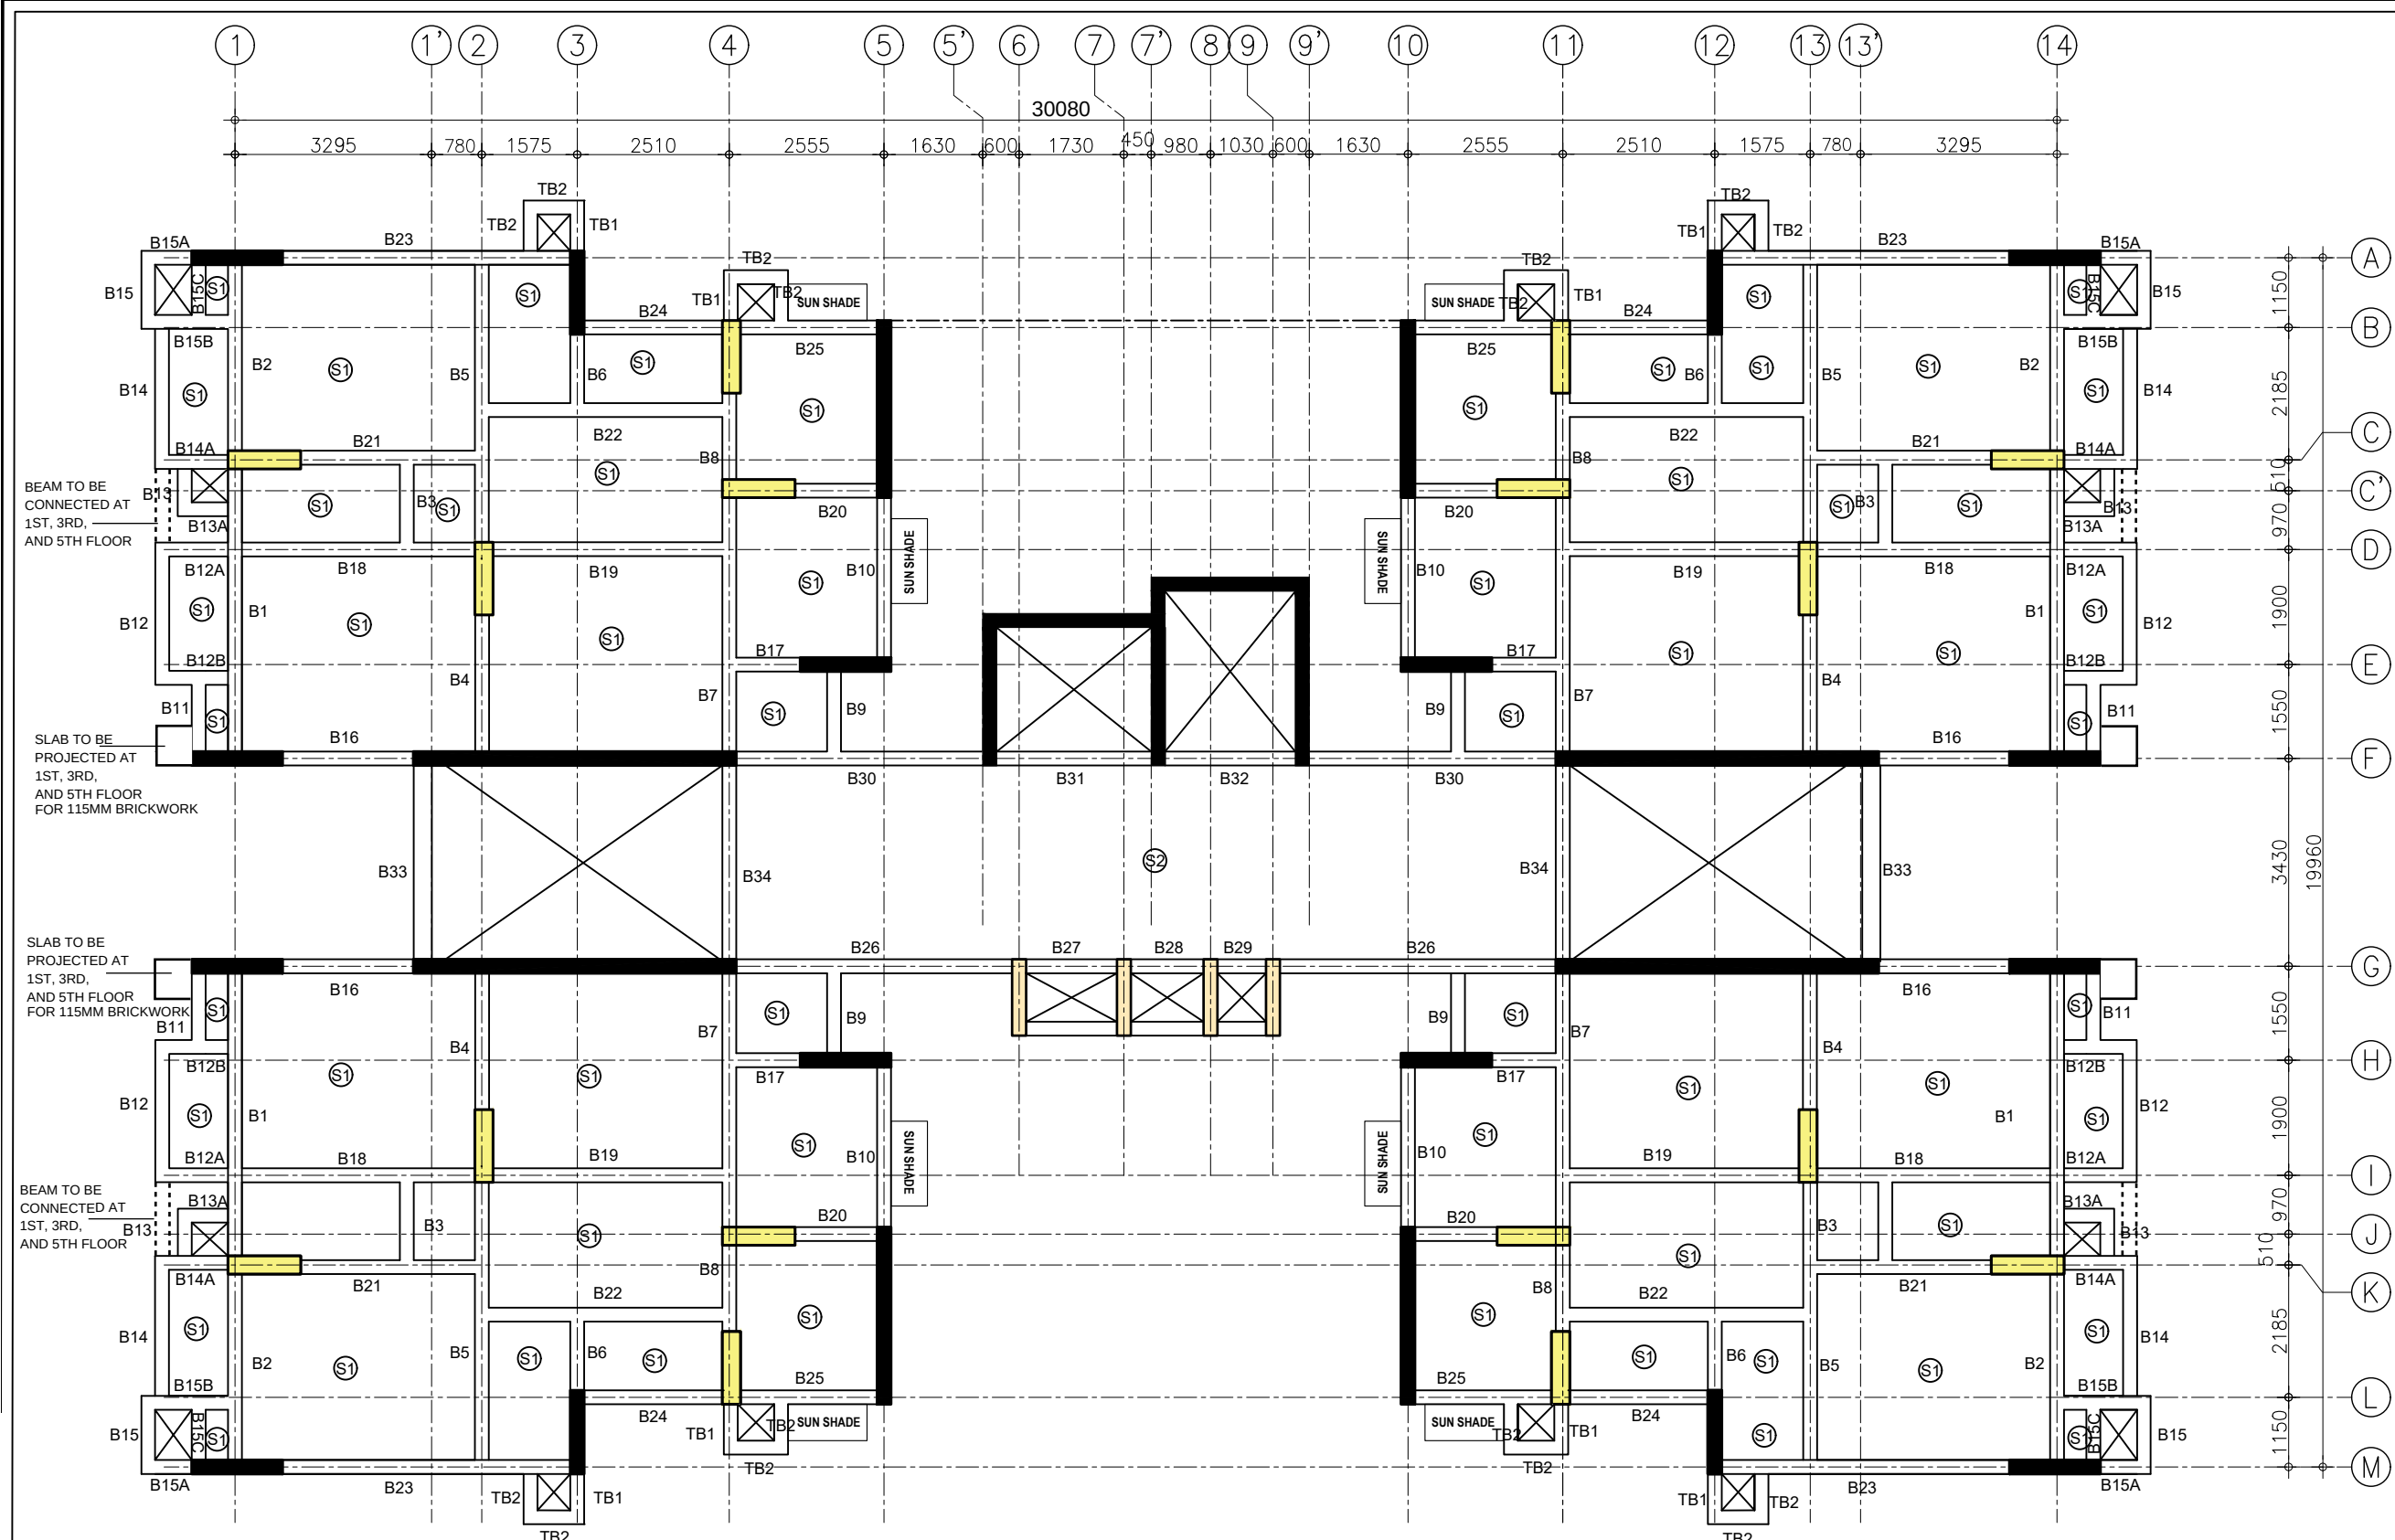

BEAM FRAMING FOR TYPICAL FLOORS

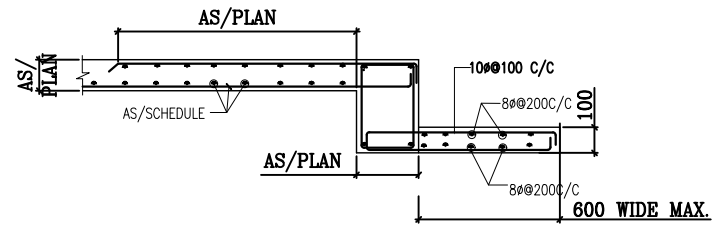

TYPICAL SUNSHADE SECTION

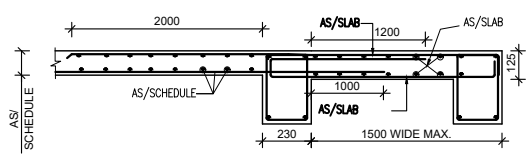

SEC-AA

SLABS SCHEDULE DETAILS

S.NO	SLAB MARK	SLAB THICK	REINFORCEMENT			
			BOTTOM THRU BARS		TOP BARS	
			ALONG SHORT SPAN	ALONG LONG SPAN	ALONG SHORT SPAN	ALONG LONG SPAN
1.	S1	125	8@125C/C	8@150C/C	8@125C/C	8@150C/C
2.	S2	125	10@125C/C	10@150C/C	10@125C/C	10@150C/C

- NOTES:-
- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
 - THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
 - DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
 - WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
 - REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
 - REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
 - ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
 - LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47xdia OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
 - CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
 - ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
 - CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
 - THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
 - PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
 - CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
 - THE BUILDING HAS BEEN DESIGNED FOR G+6. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.

TENDER DRAWING

CLIENT

**OIL INDIA LIMITED**
(A Govt. of India Enterprise)

CONSULTANT

**RITES**
THE INFRASTRUCTURE PEOPLE
(A Govt. of India Enterprise)

PROJECT

BQ WORKMEN HOUSING

BUILDING

HOUSING BUILDING (G+6)

DRAWING TITLE

BEAM LAYOUT PLAN FOR TYPICAL FLOORS

DRG. NO.

MITES/BLD/STR/TD/HOUSING(G+6)/107

NORTH






SCALE

NTS



DATE

JULY 2025

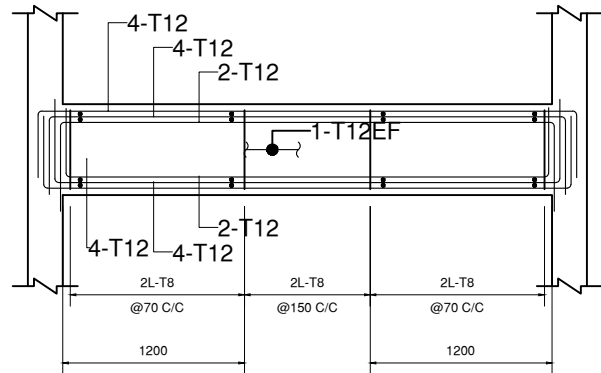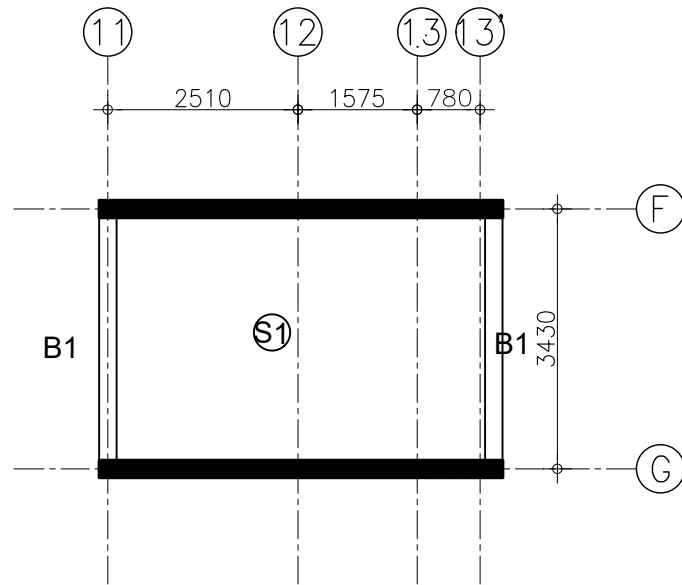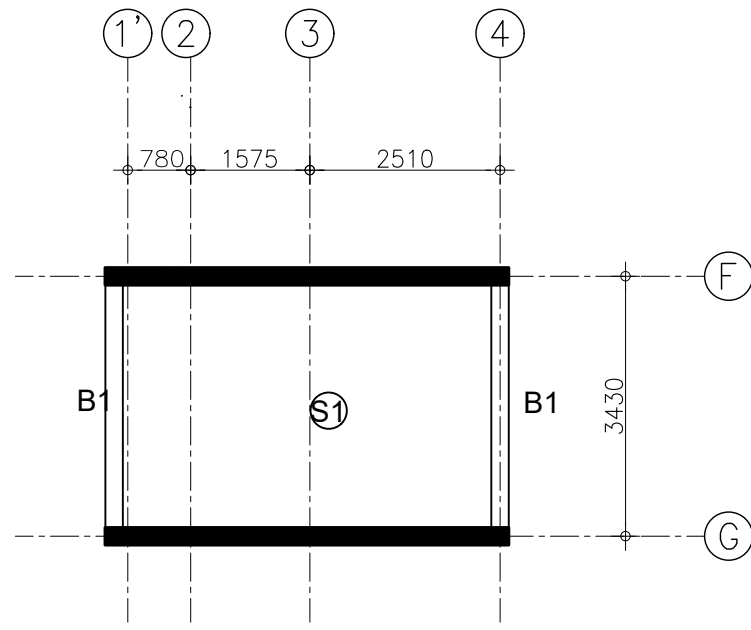

B1:300x600

MUMTY LEVEL AND WATER TANK BOTTOM LEVEL PLAN

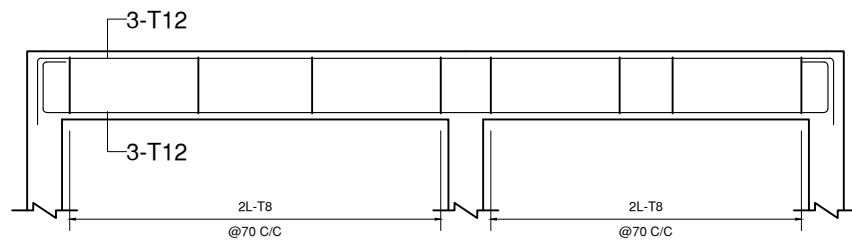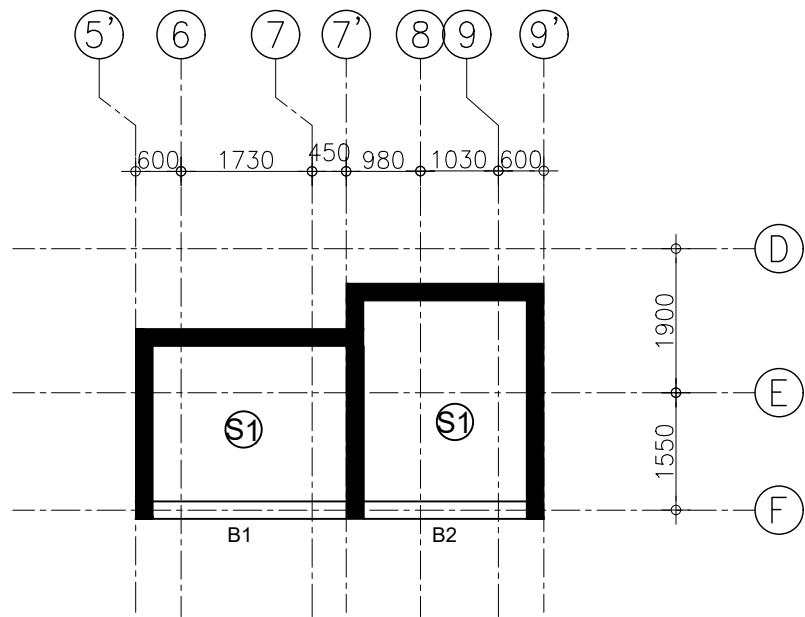

B1:230x450

B2:230x450

LIFT OVERHEAD LVL. SLABS SCHEDULE DETAILS

S.NO	SLAB MARK	SLAB THICK	R E I N F O R C E M E N T			
			BOTTOM THRU BARS		TOP BARS	
			ALONG SHORT SPAN	ALONG LONG SPAN.	ALONG SHORT SPAN	ALONG LONG SPAN.
1.	S1	125	8@200C/C	8@200C/C	8@200C/C	8@200C/C

MUMTY LVL. SLABS SCHEDULE DETAILS

S.NO	SLAB MARK	SLAB THICK	R E I N F O R C E M E N T			
			BOTTOM THRU BARS		TOP BARS	
			ALONG SHORT SPAN	ALONG LONG SPAN.	ALONG SHORT SPAN	ALONG LONG SPAN.
1.	S1	125	8@150C/C	8@150C/C	8@150C/C	8@150C/C

WATER TANK BOTTOM SLABS SCHEDULE DETAILS







S.NO	SLAB MARK	SLAB THICK	R E I N F O R C E M E N T			
			BOTTOM THRU BARS		TOP BARS	
			ALONG SHORT SPAN	ALONG LONG SPAN.	ALONG SHORT SPAN	ALONG LONG SPAN.
1.	S1	150	10@125C/C	10@150C/C	8@125C/C	8@150C/C

NOTES:-

- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
- THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
- DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
- WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
- REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
- REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
- ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
- LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47Xdia OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
- CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
- ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
- CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
- THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
- PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
- CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONARY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
- THE BUILDING HAS BEEN DESIGNED FOR G+6. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.

TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	HOUSING BUILDING (G+6)	
DRAWING TITLE	MUMTY , WATER TANK BOTTOM AND LIFT OVERHEAD DETAILS	
DRG. NO.	MITES/BLD/STR/TD/HOUSING(G+6)/109	
NORTH	SCALE	DATE
	NTS	JULY 2025

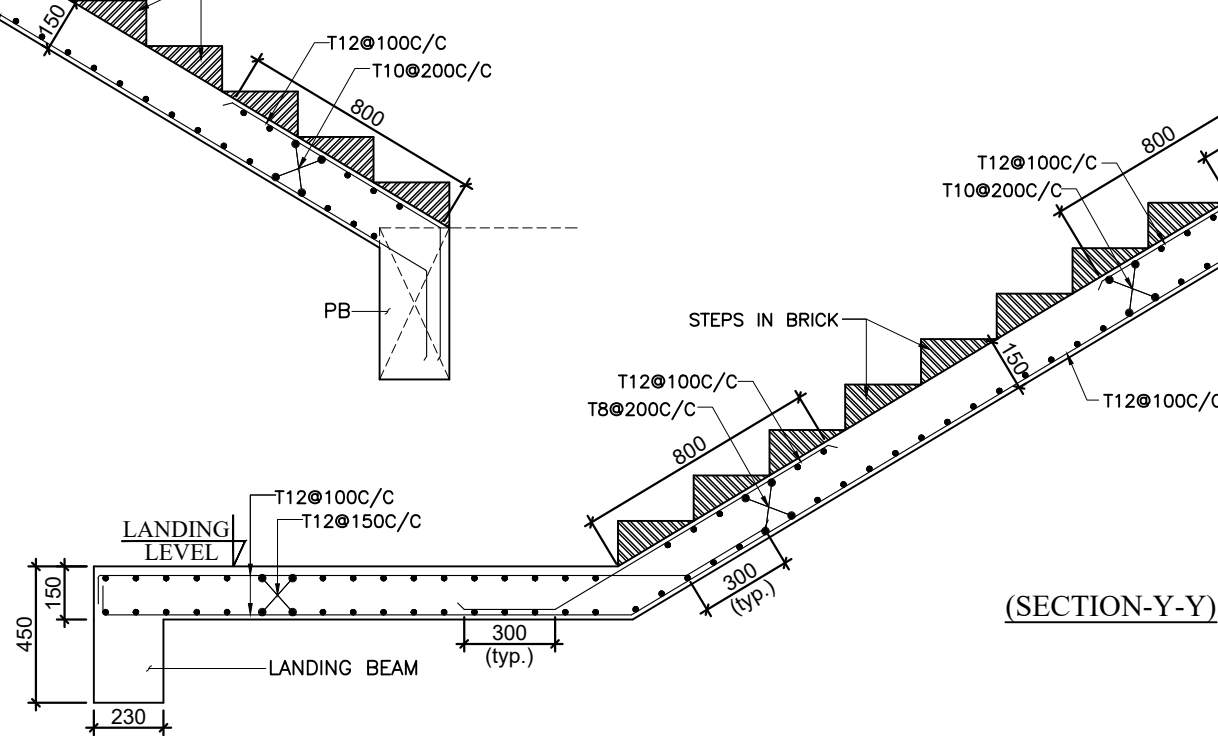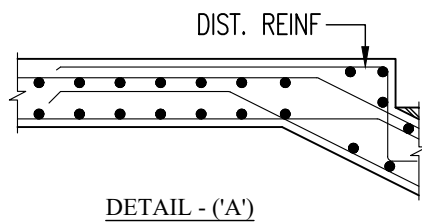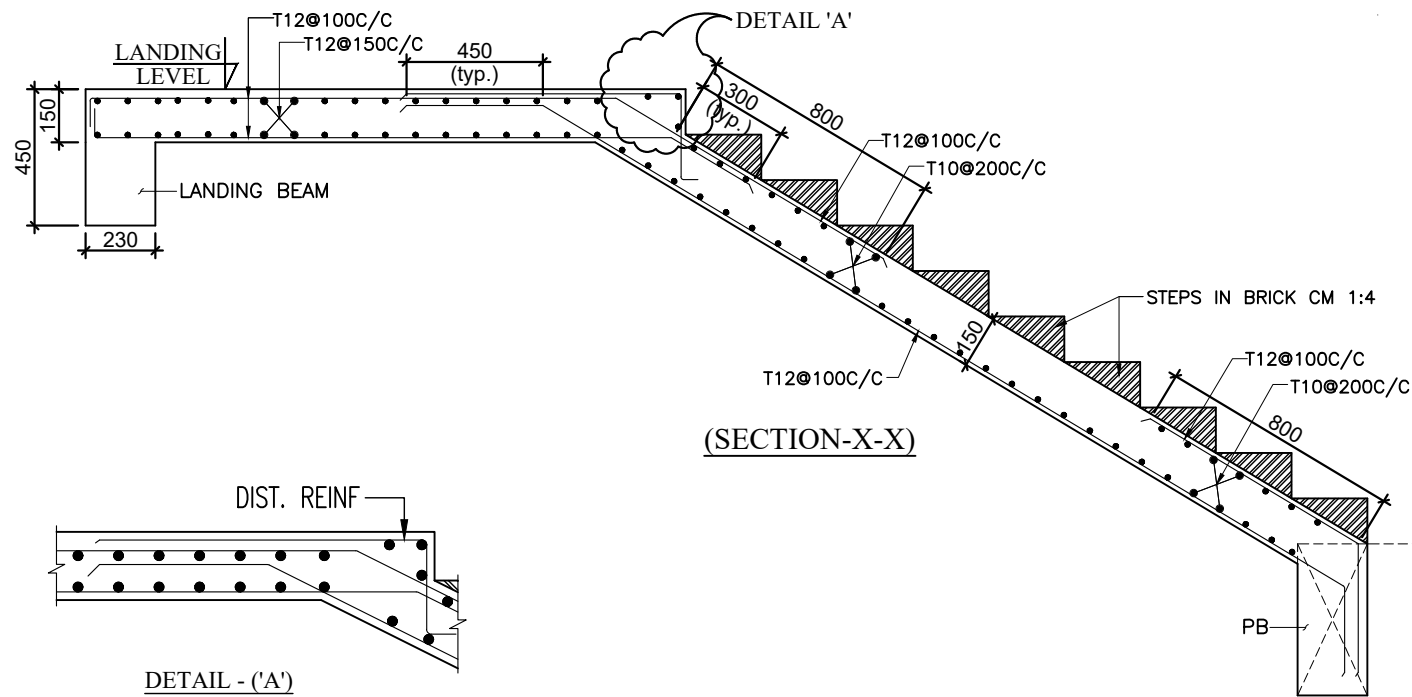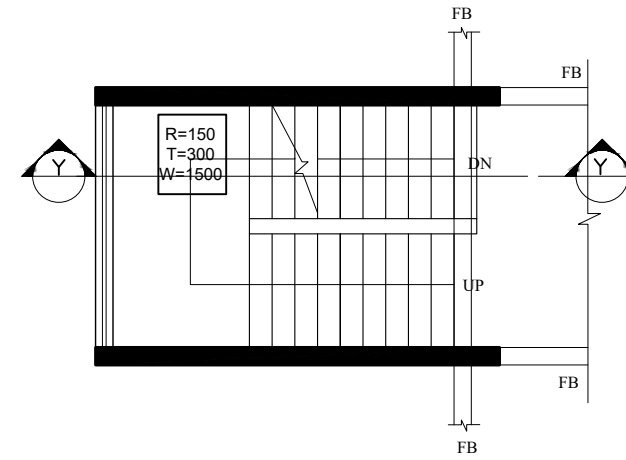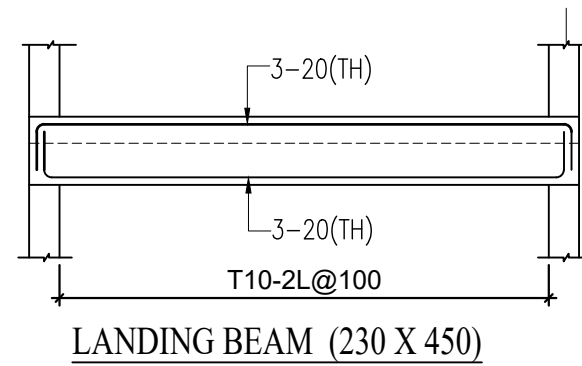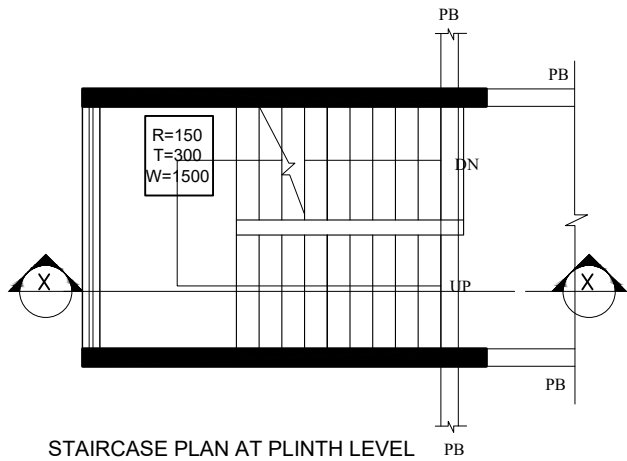


NOTE:-
NUMBER OF STEPS TO BE AS PER ARCHITECTURAL DRAWINGS


- NOTES:-**
- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
 - THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
 - DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
 - WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
 - REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED FOR ALL RCC WORK.
 - REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
 - ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM.
 - LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d_{dia} OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
 - CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM, RCC WALL - 30MM.
 - ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
 - CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
 - THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
 - PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
 - CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
 - THE BUILDING HAS BEEN DESIGNED FOR G+6. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.

TENDER DRAWING


CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT		
PROJECT	BQ WORKMEN HOUSING	
BUILDING	HOUSING BUILDING (G+6)	
DRAWING TITLE	STAIRCASE PLAN & DETAILS	
DRG. NO.	BITES/BLD/STR/TD/HOUSING(G+6)/110	
NORTH	SCALE	DATE
	NTS	JULY 2025

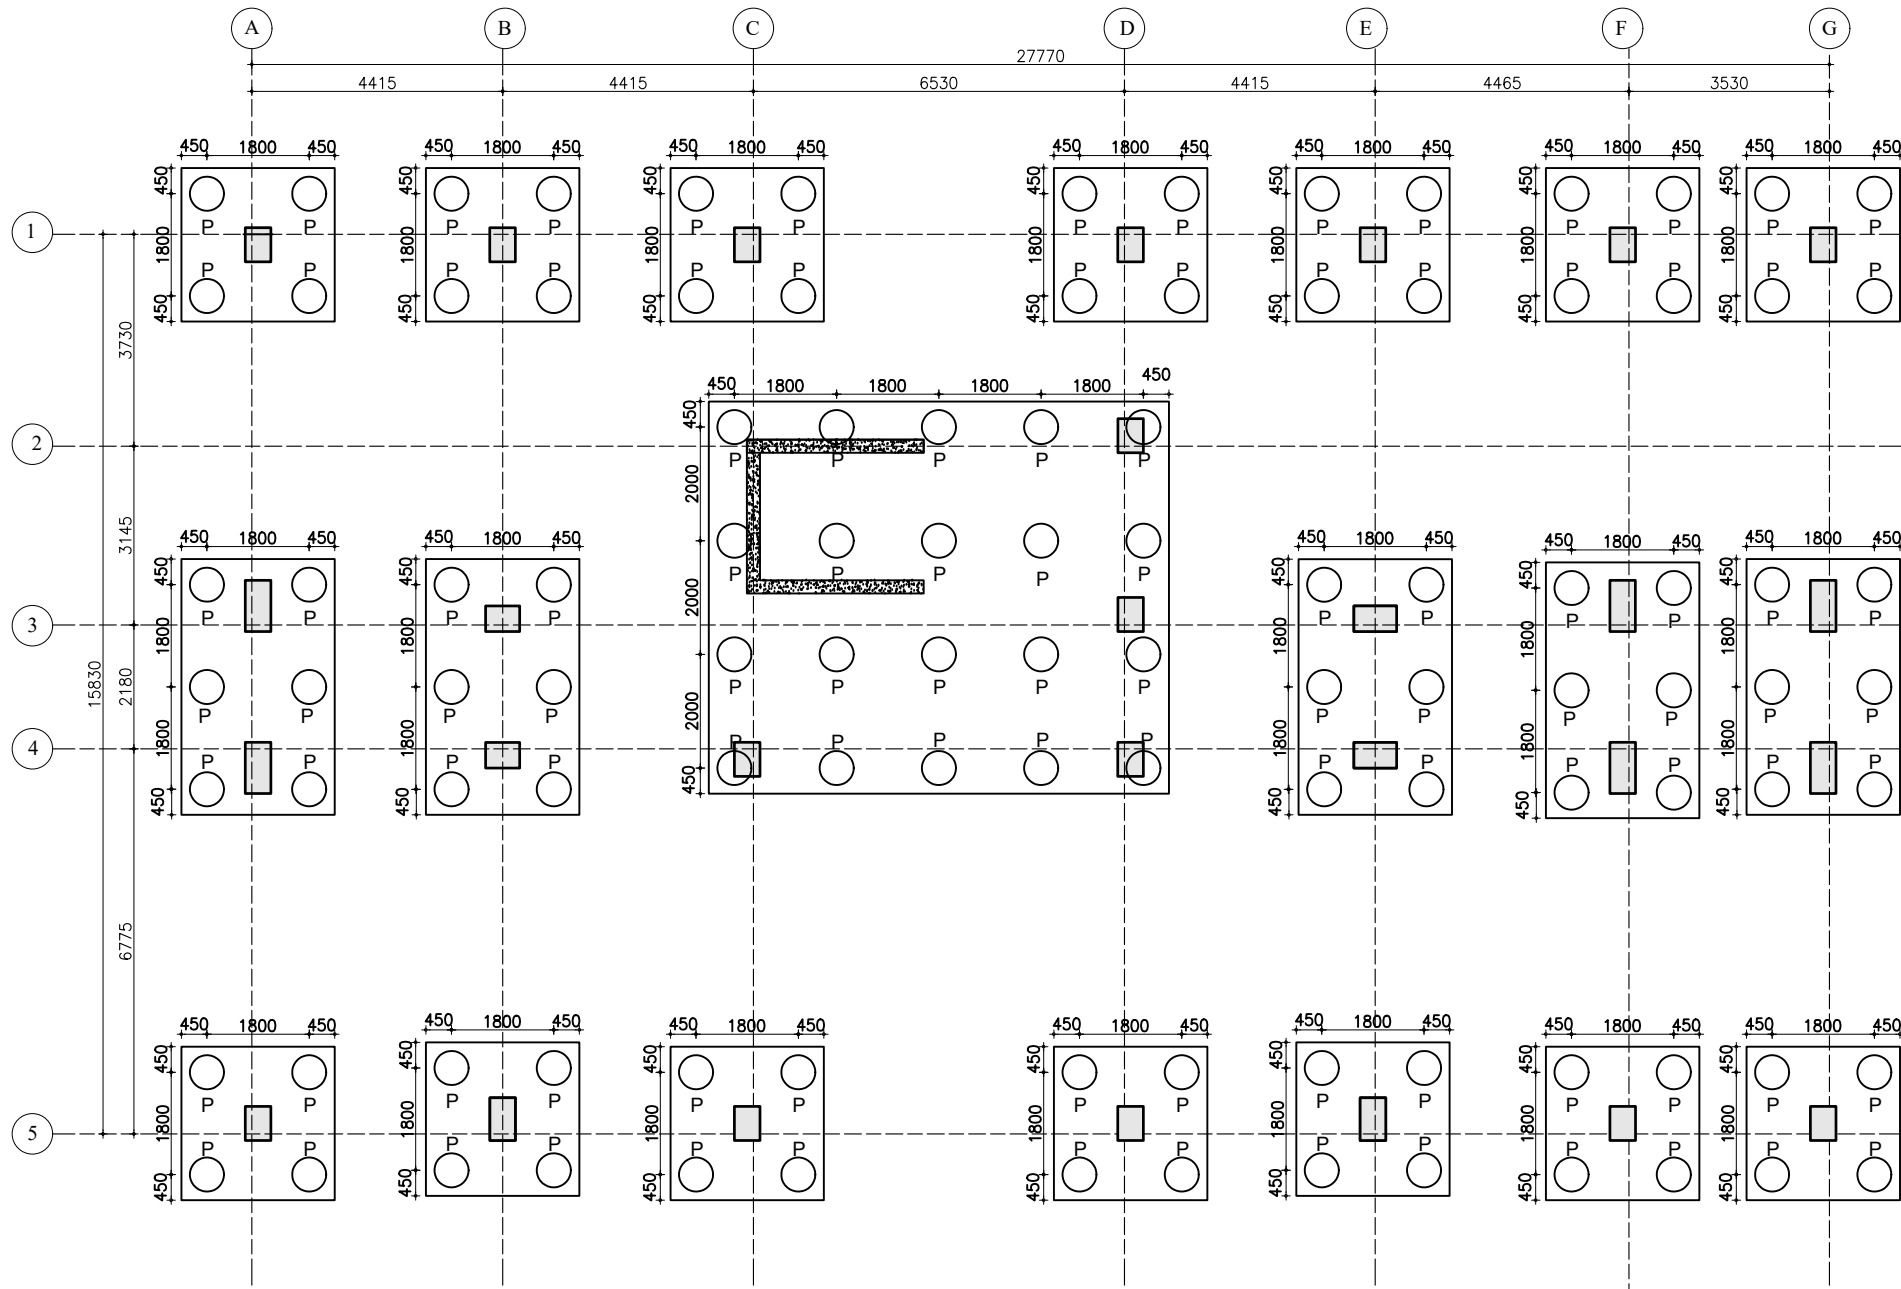

FOUNDATION LAYOUT PLAN

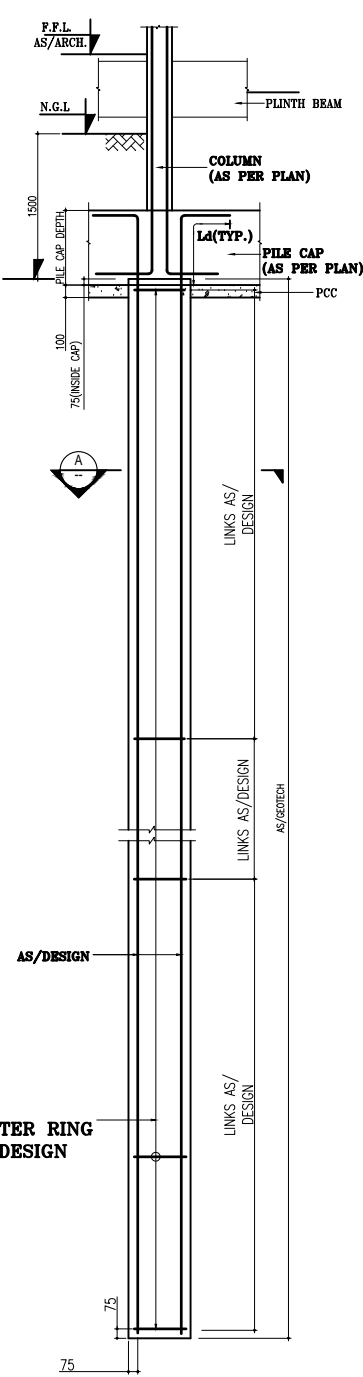

TYPICAL ELEVATION OF PILE (600MM DIA)




SECTION A-A

NOTES:-

- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
- THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
- DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
- WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
- REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED FOR ALL RCC WORK.
- REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
- ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM.
- LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d_b OF BAR FOR M30 GRADE OF CONCRETE. LAPS SHALL BE STAGGERED. NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UP TO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
- CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE: FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
- ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
- CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
- THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
- PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
- CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920.
- ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOO.
- THE BUILDING HAS BEEN DESIGNED FOR G+3. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
- FOR 6000 RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT. SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.
- THE STRUCTURAL MEMBER SIZES AND REINFORCEMENT DETAILS SHOWN IN THESE DRAWINGS ARE TENTATIVE AND INTENDED FOR GENERAL GUIDANCE ONLY. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO CARRY OUT THE FINAL DESIGN, DETAILING, AND STABILITY VERIFICATION IN ACCORDANCE WITH APPLICABLE CODES AND ACTUAL SITE CONDITIONS. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ENSURING THE SAFETY, SERVICEABILITY, AND DURABILITY OF THE STRUCTURE DURING CONSTRUCTION AND THROUGHOUT ITS SERVICE LIFE. ANY DISCREPANCY OR DEVIATION SHALL BE REPORTED TO THE ENGINEER FOR REVIEW PRIOR TO EXECUTION.


TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	GUEST HOUSE BUILDING (G+3)	
DRAWING TITLE	FOUNDATION LAYOUT PLAN	
DRG. NO.	MITES/BLD/STR/TD/GH(G+3)/111	
NORTH	SCALE	DATE
	NTS	AUGUST 2025

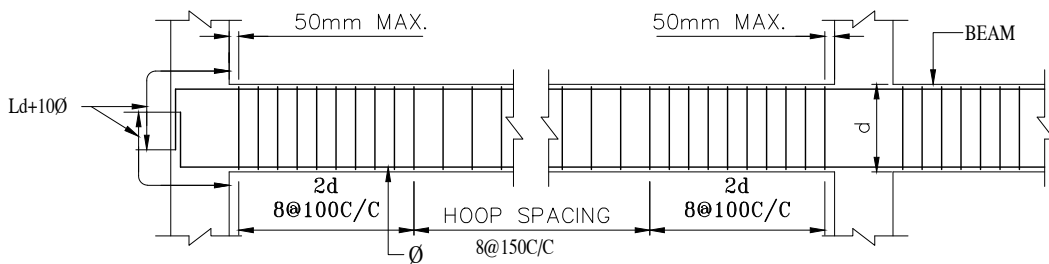


Ld=DEVELOPMENT LENGTH
d= DEPTH OF BEAM
Ø= DIAMETER OF BAR

TYPICAL BEAM SHEAR R/F DETAIL

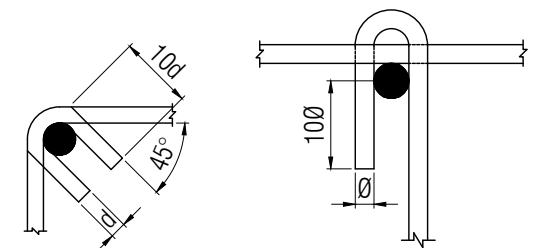


FOR 135° HOOK FOR 180° HOOK

TYPICAL HOOK DETAIL

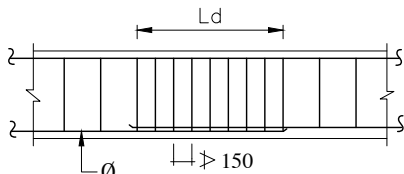


Ld = DEVELOPMENT
LENGTH IN TENSION
Ø = BAR DIAMETER

LAP DETAIL IN BEAM

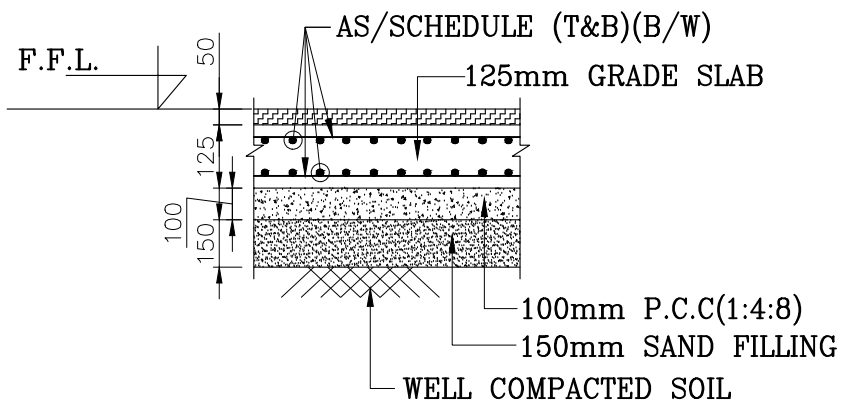

TYPICAL GRADE SLAB DETAIL

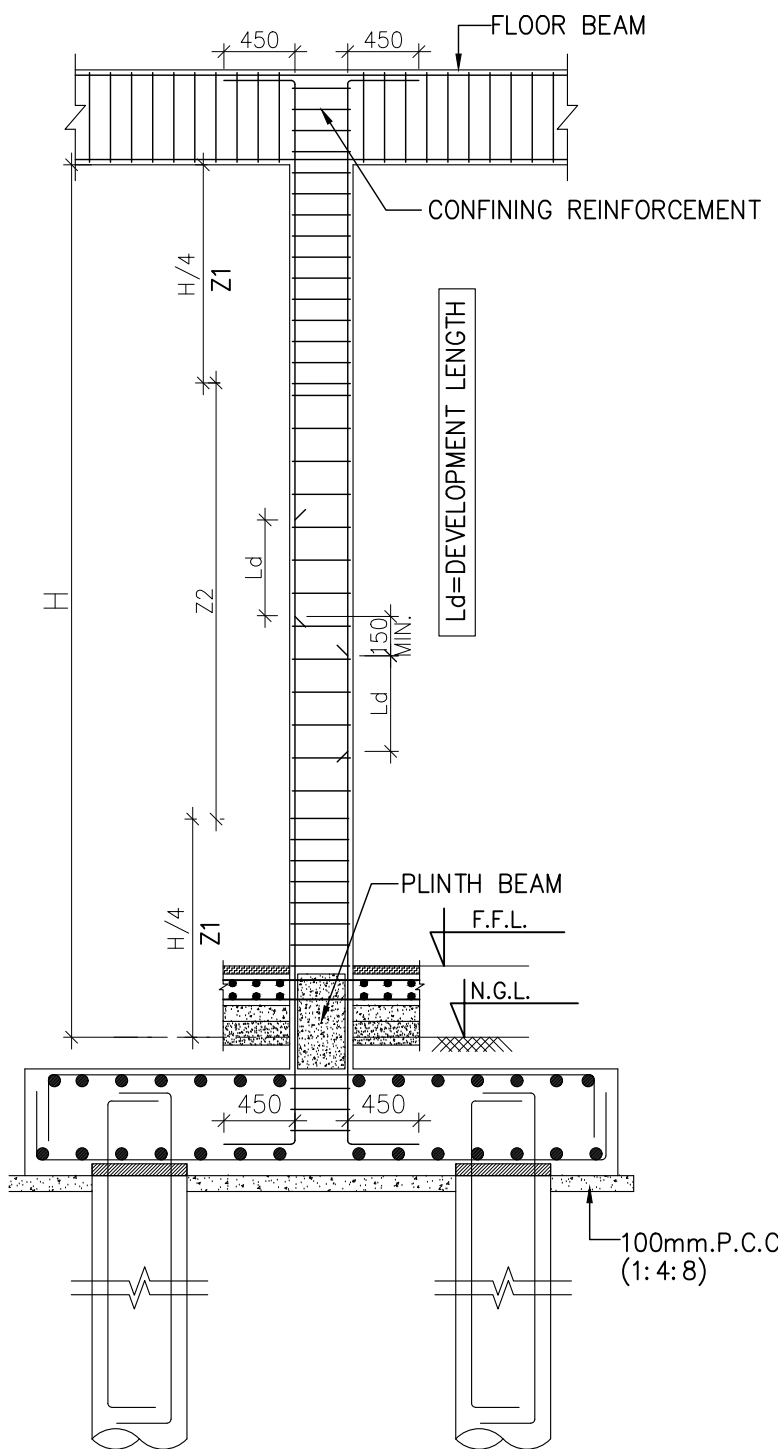


TYPICAL DETAILS FOR LAP
& RING SPACING IN COLUMN
DETAIL-A


IMPORTANT NOTE:-
1. SOIL SHOULD BE TESTED AT SITE FOR SBC/PILE LOAD CARRYING CAPACITY BEFORE THE COMMENCEMENT OF THE WORK.

NOTES:-	
1.	ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
2.	THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
3.	DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
4.	WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
5.	REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED FOR ALL RCC WORK.
6.	REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
7.	ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
8.	LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d_{ia} OF BAR FOR M30 GRADE OF CONCRETE. LAPS SHALL BE STAGGERED. NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
9.	CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM. COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
10.	ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
11.	CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
12.	THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
13.	PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
14.	CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONARY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
15.	THE BUILDING HAS BEEN DESIGNED FOR G+3. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
16.	FOR 6000 RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT.
	SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.

TENDER DRAWING		
CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	GUEST HOUSE BUILDING (G+3)	
DRAWING TITLE	TYPICAL DETAILS FOR PILE , COLUMN AND BEAM	
DRG. NO.	RITES/BLD/STR/TD/GH(G+3)/112	
NORTH	SCALE	DATE
	NTS	AUGUST 2025





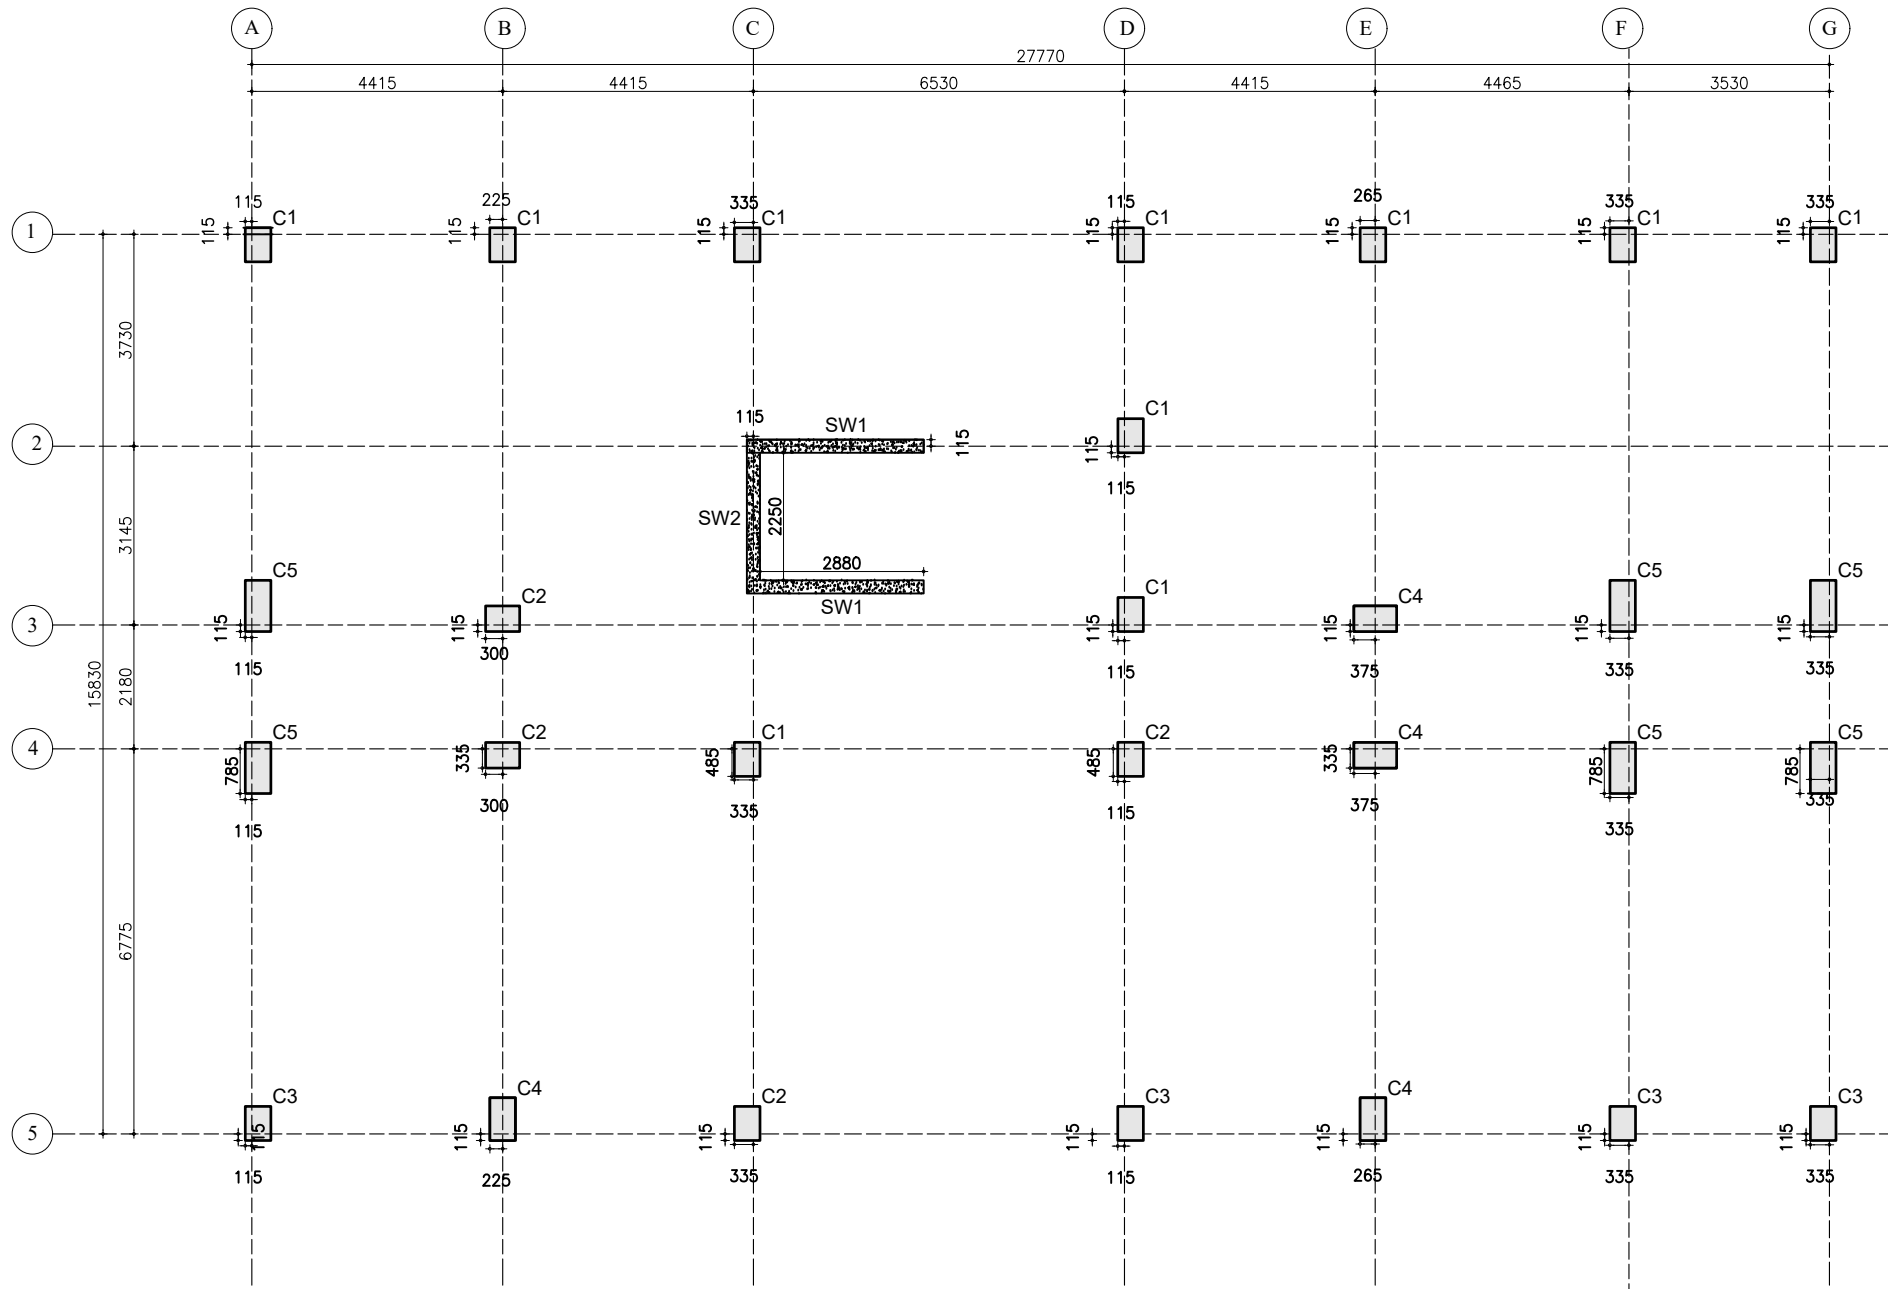





COLUMN LAYOUT PLAN

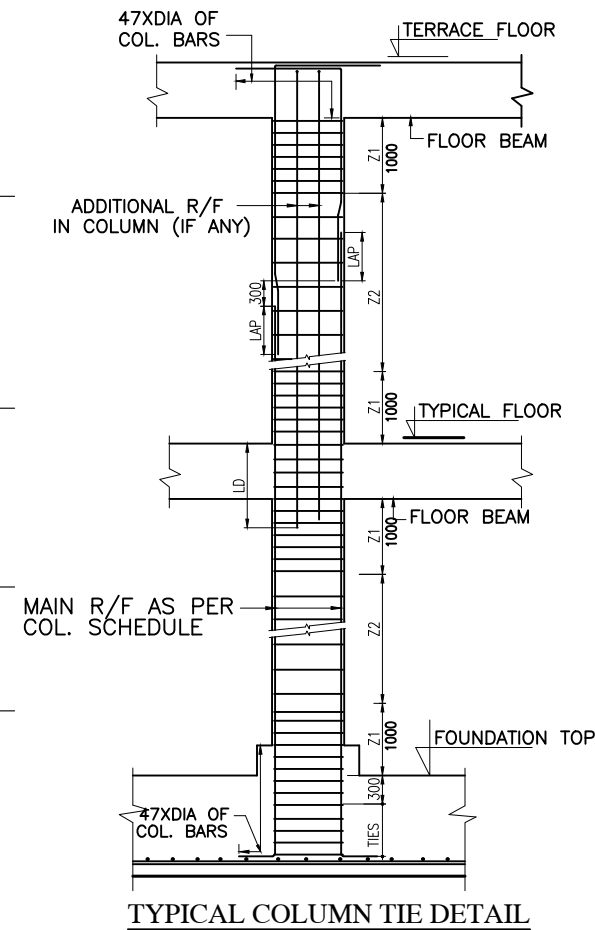

- NOTES:-
- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
 - THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
 - DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
 - WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
 - REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED FOR ALL RCC WORK.
 - REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
 - ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
 - LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47XDIA OF BAR FOR M30 GRADE OF CONCRETE. LAPS SHALL BE STAGGERED. NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
 - CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
 - ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
 - CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
 - THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
 - PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
 - CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920.
 - ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOO.
 - THE BUILDING HAS BEEN DESIGNED FOR G+3. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
 - FOR 6000 RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT.
 - SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.

TENDER DRAWING		
CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	GUEST HOUSE BUILDING (G+3)	
DRAWING TITLE	COLUMN LAYOUT PLAN	
DRG. NO.	RITES/BLD/STR/TD/GH(G+3)/113	
NORTH	SCALE	DATE
	NTS	AUGUST 2025

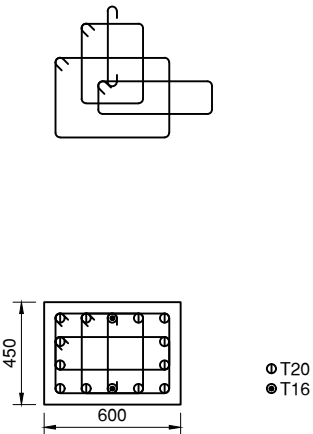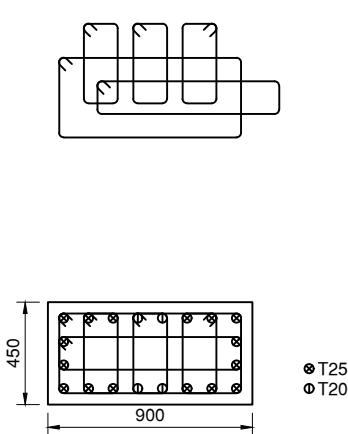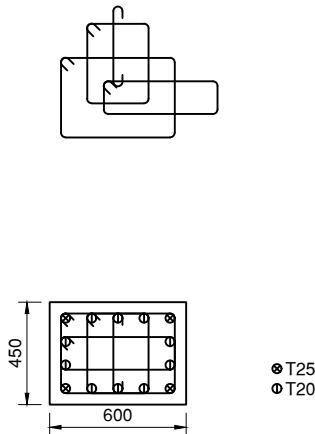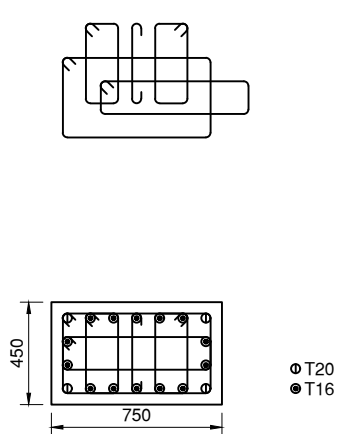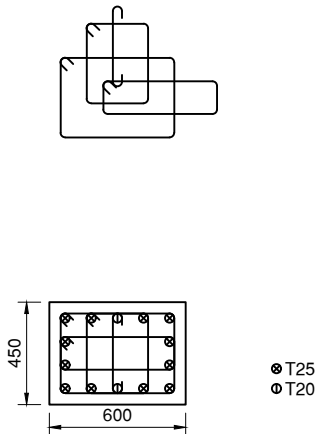FOUNDATION TO TERRACE	 ○ T20 ● T16 12-T20 + 2-T16	 ○ T25 ● T20 16-T25 + 4-T20	 ○ T25 ● T20 4-T25 + 10-T20	 ○ T20 ● T16 4-T20 + 14-T16	 ○ T25 ● T20 12-T25 + 2-T20
	C1	C5	C2	C4	C3
COLUMN MARKED					

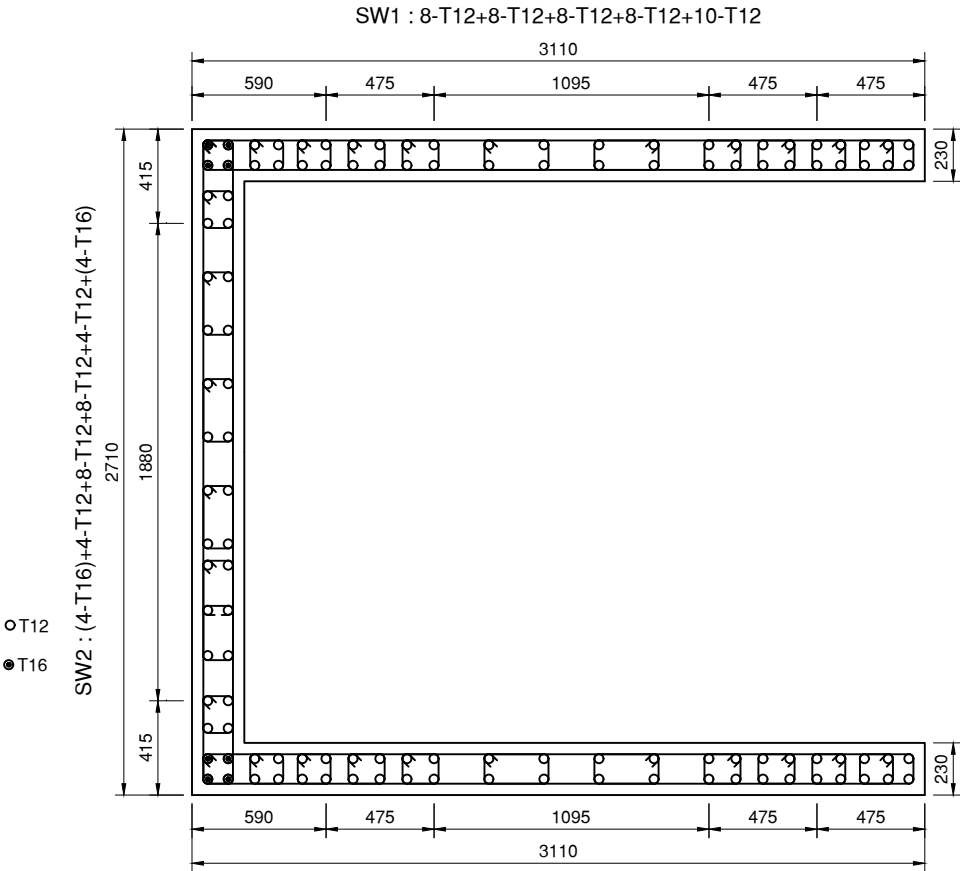FOUNDATION TO TERRACE	 ○ T12 ● T16 SW2 : (4-T16)+4-T12+8-T12+8-T12+4-T12+(4-T16) SW1 : 8-T12+8-T12+8-T12+8-T12+10-T12	SW1  SW2 
COMBINED WALL		

LATERAL TIES


ZONE	TIES SPECIFICATION
Z1	T8@75c/c
Z2	T8@150c/c

NOTES:-

- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
- THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
- DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
- WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
- REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
- REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
- ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
- LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d_{la} OF BAR FOR M30 GRADE OF CONCRETE. LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
- CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM. COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
- ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
- CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
- THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
- PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
- CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONARY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOO.
- THE BUILDING HAS BEEN DESIGNED FOR G+3. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
- FOR 600Ø RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT.
- SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.

TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	GUEST HOUSE BUILDING (G+3)	
DRAWING TITLE	COLUMN REINFORCEMENT DETAILS	
DRG. NO.	MITES/BLD/STR/TD/GH(G+3)/114	
NORTH	SCALE	DATE
	NTS	AUGUST 2025

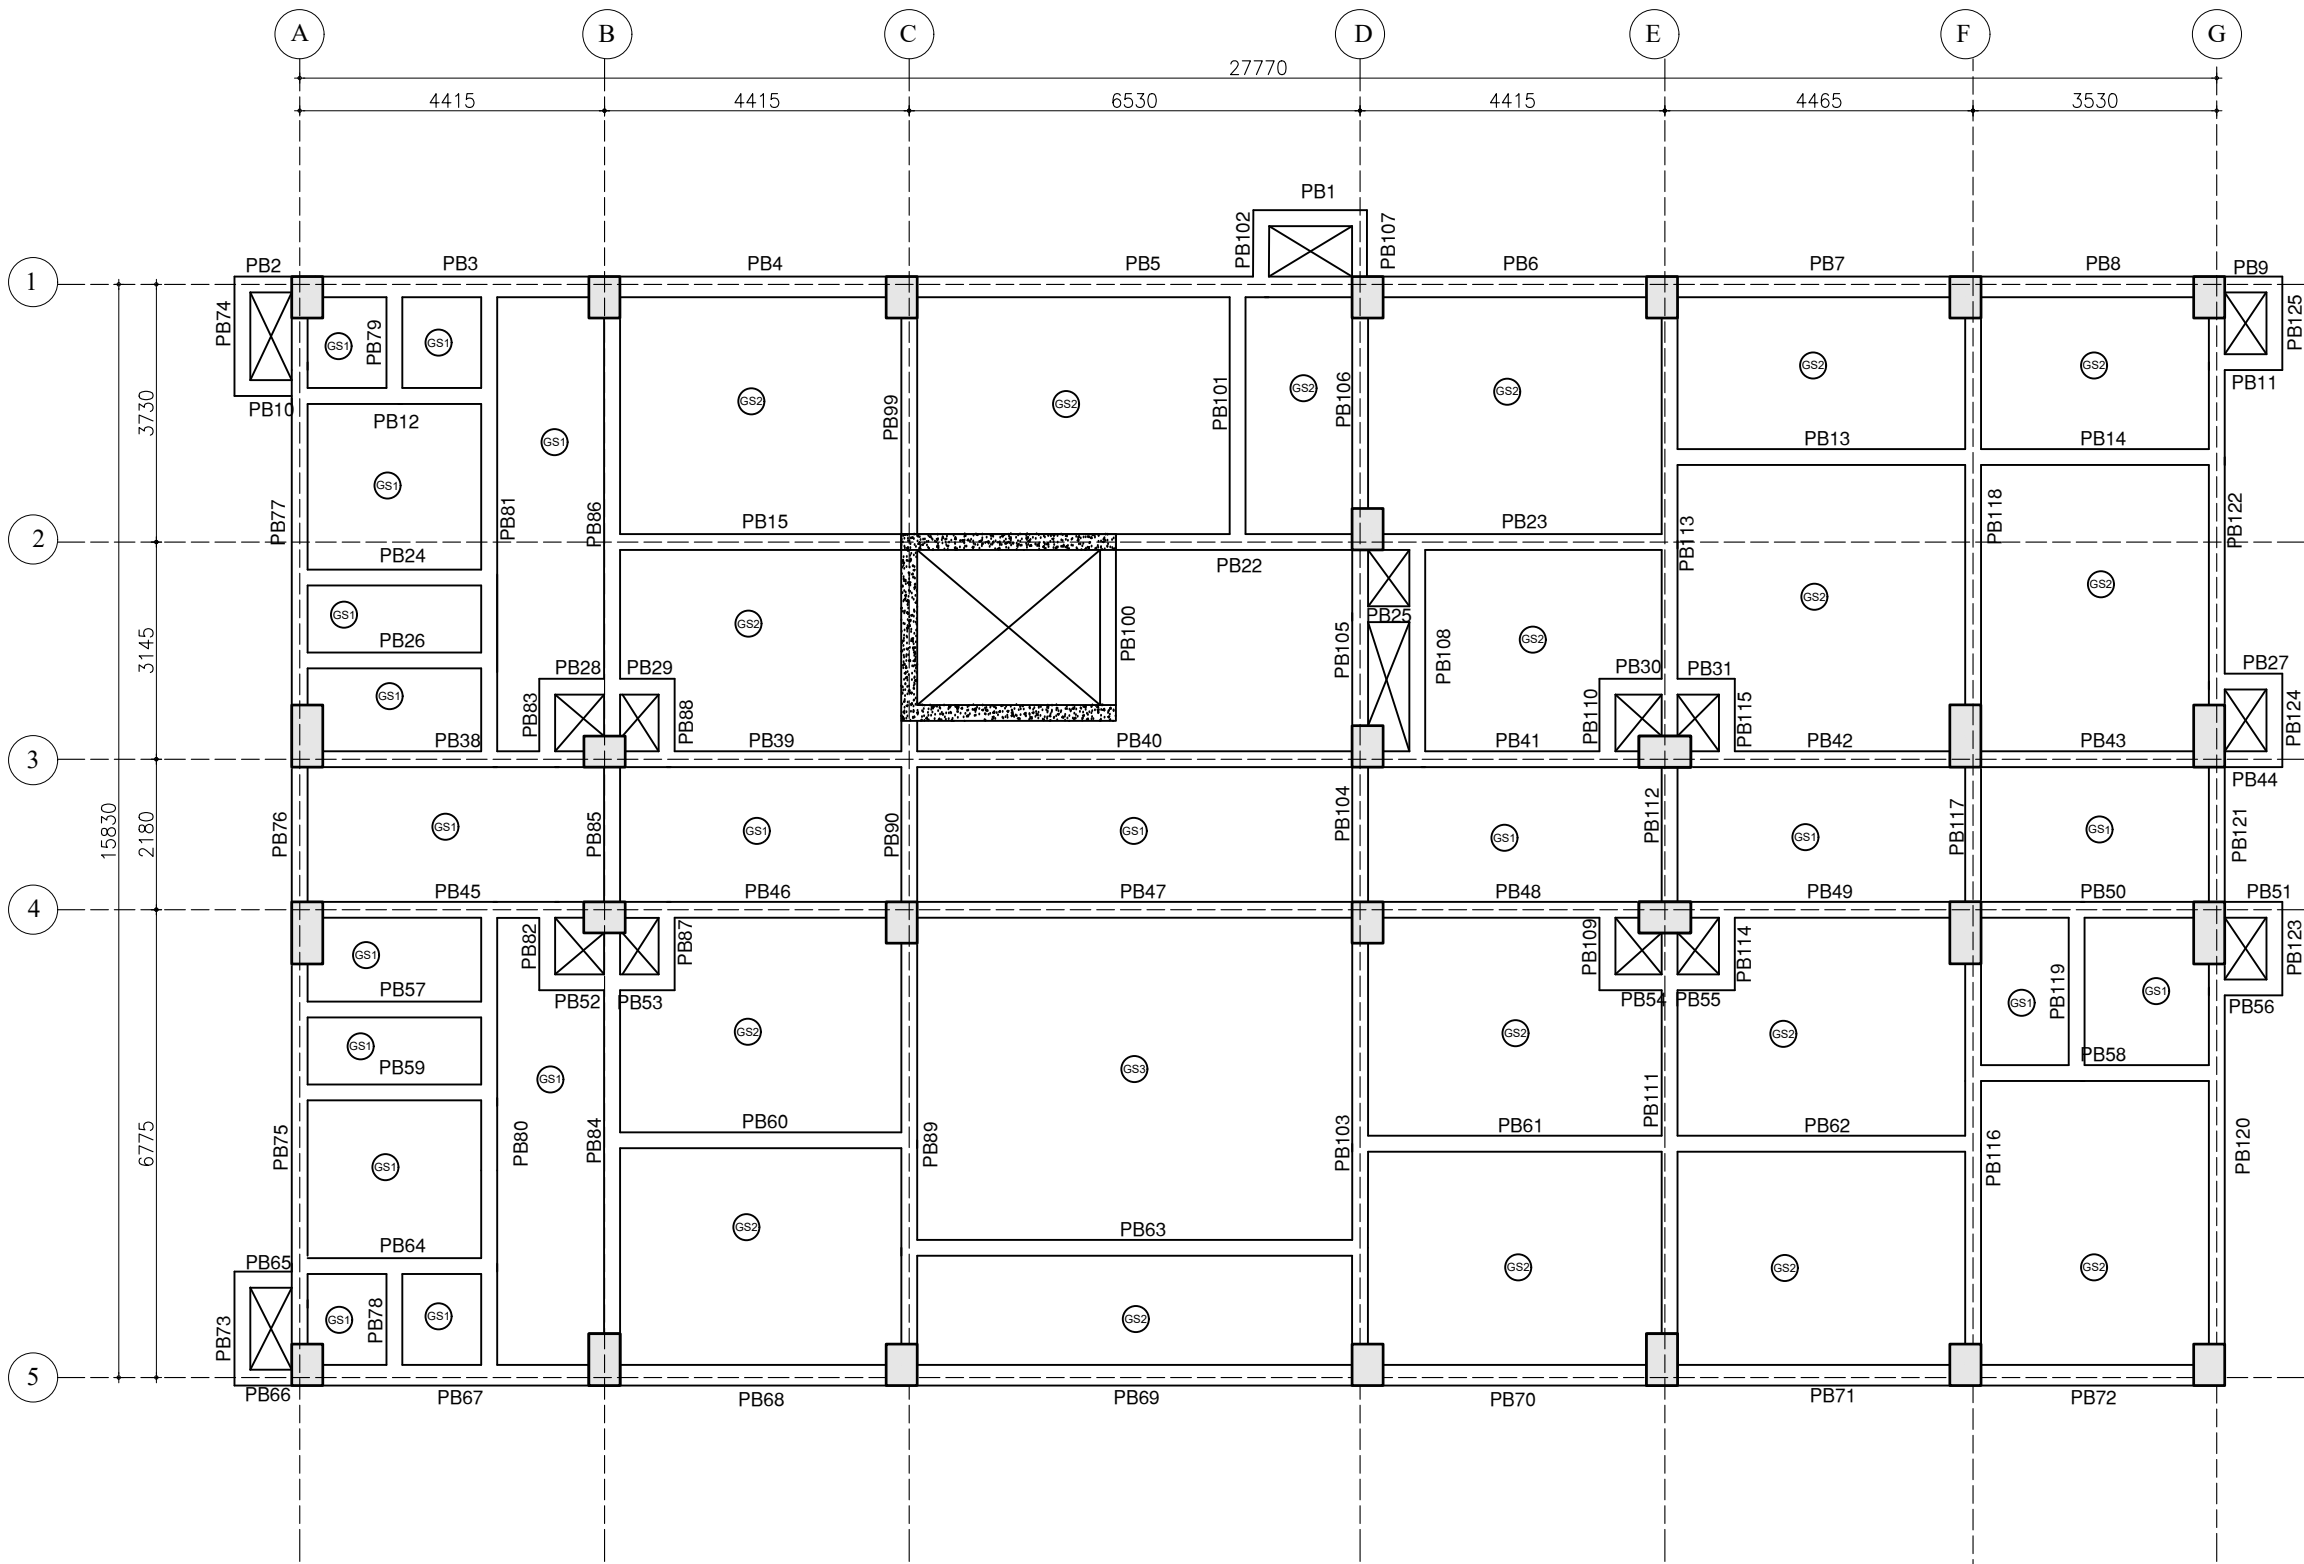

PLINTH BEAM LAYOUT PLAN

GRADE SLABS SCHEDULE DETAILS

S.NO	SLAB MARK	SLAB THICK	REINFORCEMENT			
			BOTTOM THRU BARS		TOP BARS	
			ALONG SHORT SPAN	ALONG LONG SPAN	ALONG SHORT SPAN	ALONG LONG SPAN
1.	GS1	150	8@175C/C	8@200C/C	8@175C/C	8@200C/C
2.	GS2	150	8@150C/C	8@200C/C	8@150C/C	8@200C/C
3.	GS3	150	8@100C/C	8@125C/C	8@100C/C	8@125C/C



NOTES:-

- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
- THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
- DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
- WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
- REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED FOR ALL RCC WORK.
- REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
- ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
- LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d_{ba} OF BAR FOR M30 GRADE OF CONCRETE. LAPS SHALL BE STAGGERED. NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
- CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
- ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
- CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
- THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
- PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
- CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920.
- ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOO.
- THE BUILDING HAS BEEN DESIGNED FOR G+3. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
- FOR 6000 RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT.
- SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.

TENDER DRAWING


CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)
PROJECT	BQ WORKMEN HOUSING
BUILDING	GUEST HOUSE BUILDING (G+3)
DRAWING TITLE	BEAM LAYOUT PLAN AT PLINTH LEVEL
DRG. NO.	MITES/BLD/STR/TD/GH(G+3)/115
NORTH	SCALE NTS
	DATE AUGUST 2025

The image displays 20 structural drawings of reinforced concrete beams, labeled B66 through B122. Each drawing includes a cross-section and a longitudinal section. The cross-sections show the beam's width, height, and reinforcement layout, including top and bottom bars, stirrups, and cross-sections of the reinforcement bars. The longitudinal sections show the beam's length, span, and reinforcement layout, including top and bottom bars, stirrups, and cross-sections of the reinforcement bars. The drawings are arranged in a grid, with the beam labels (B66 to B122) positioned below each drawing. The reinforcement details and dimensions are provided for each beam, including bar sizes, spacing, and lengths. The drawings are oriented horizontally, with the beam's length running from left to right. The cross-sections are shown at the ends of the beam, and the longitudinal sections are shown along the length of the beam. The drawings are detailed and precise, showing all necessary information for the construction of the beams.

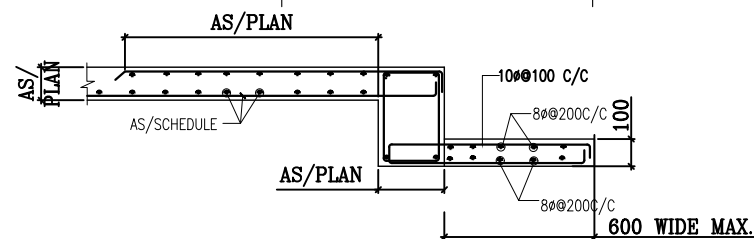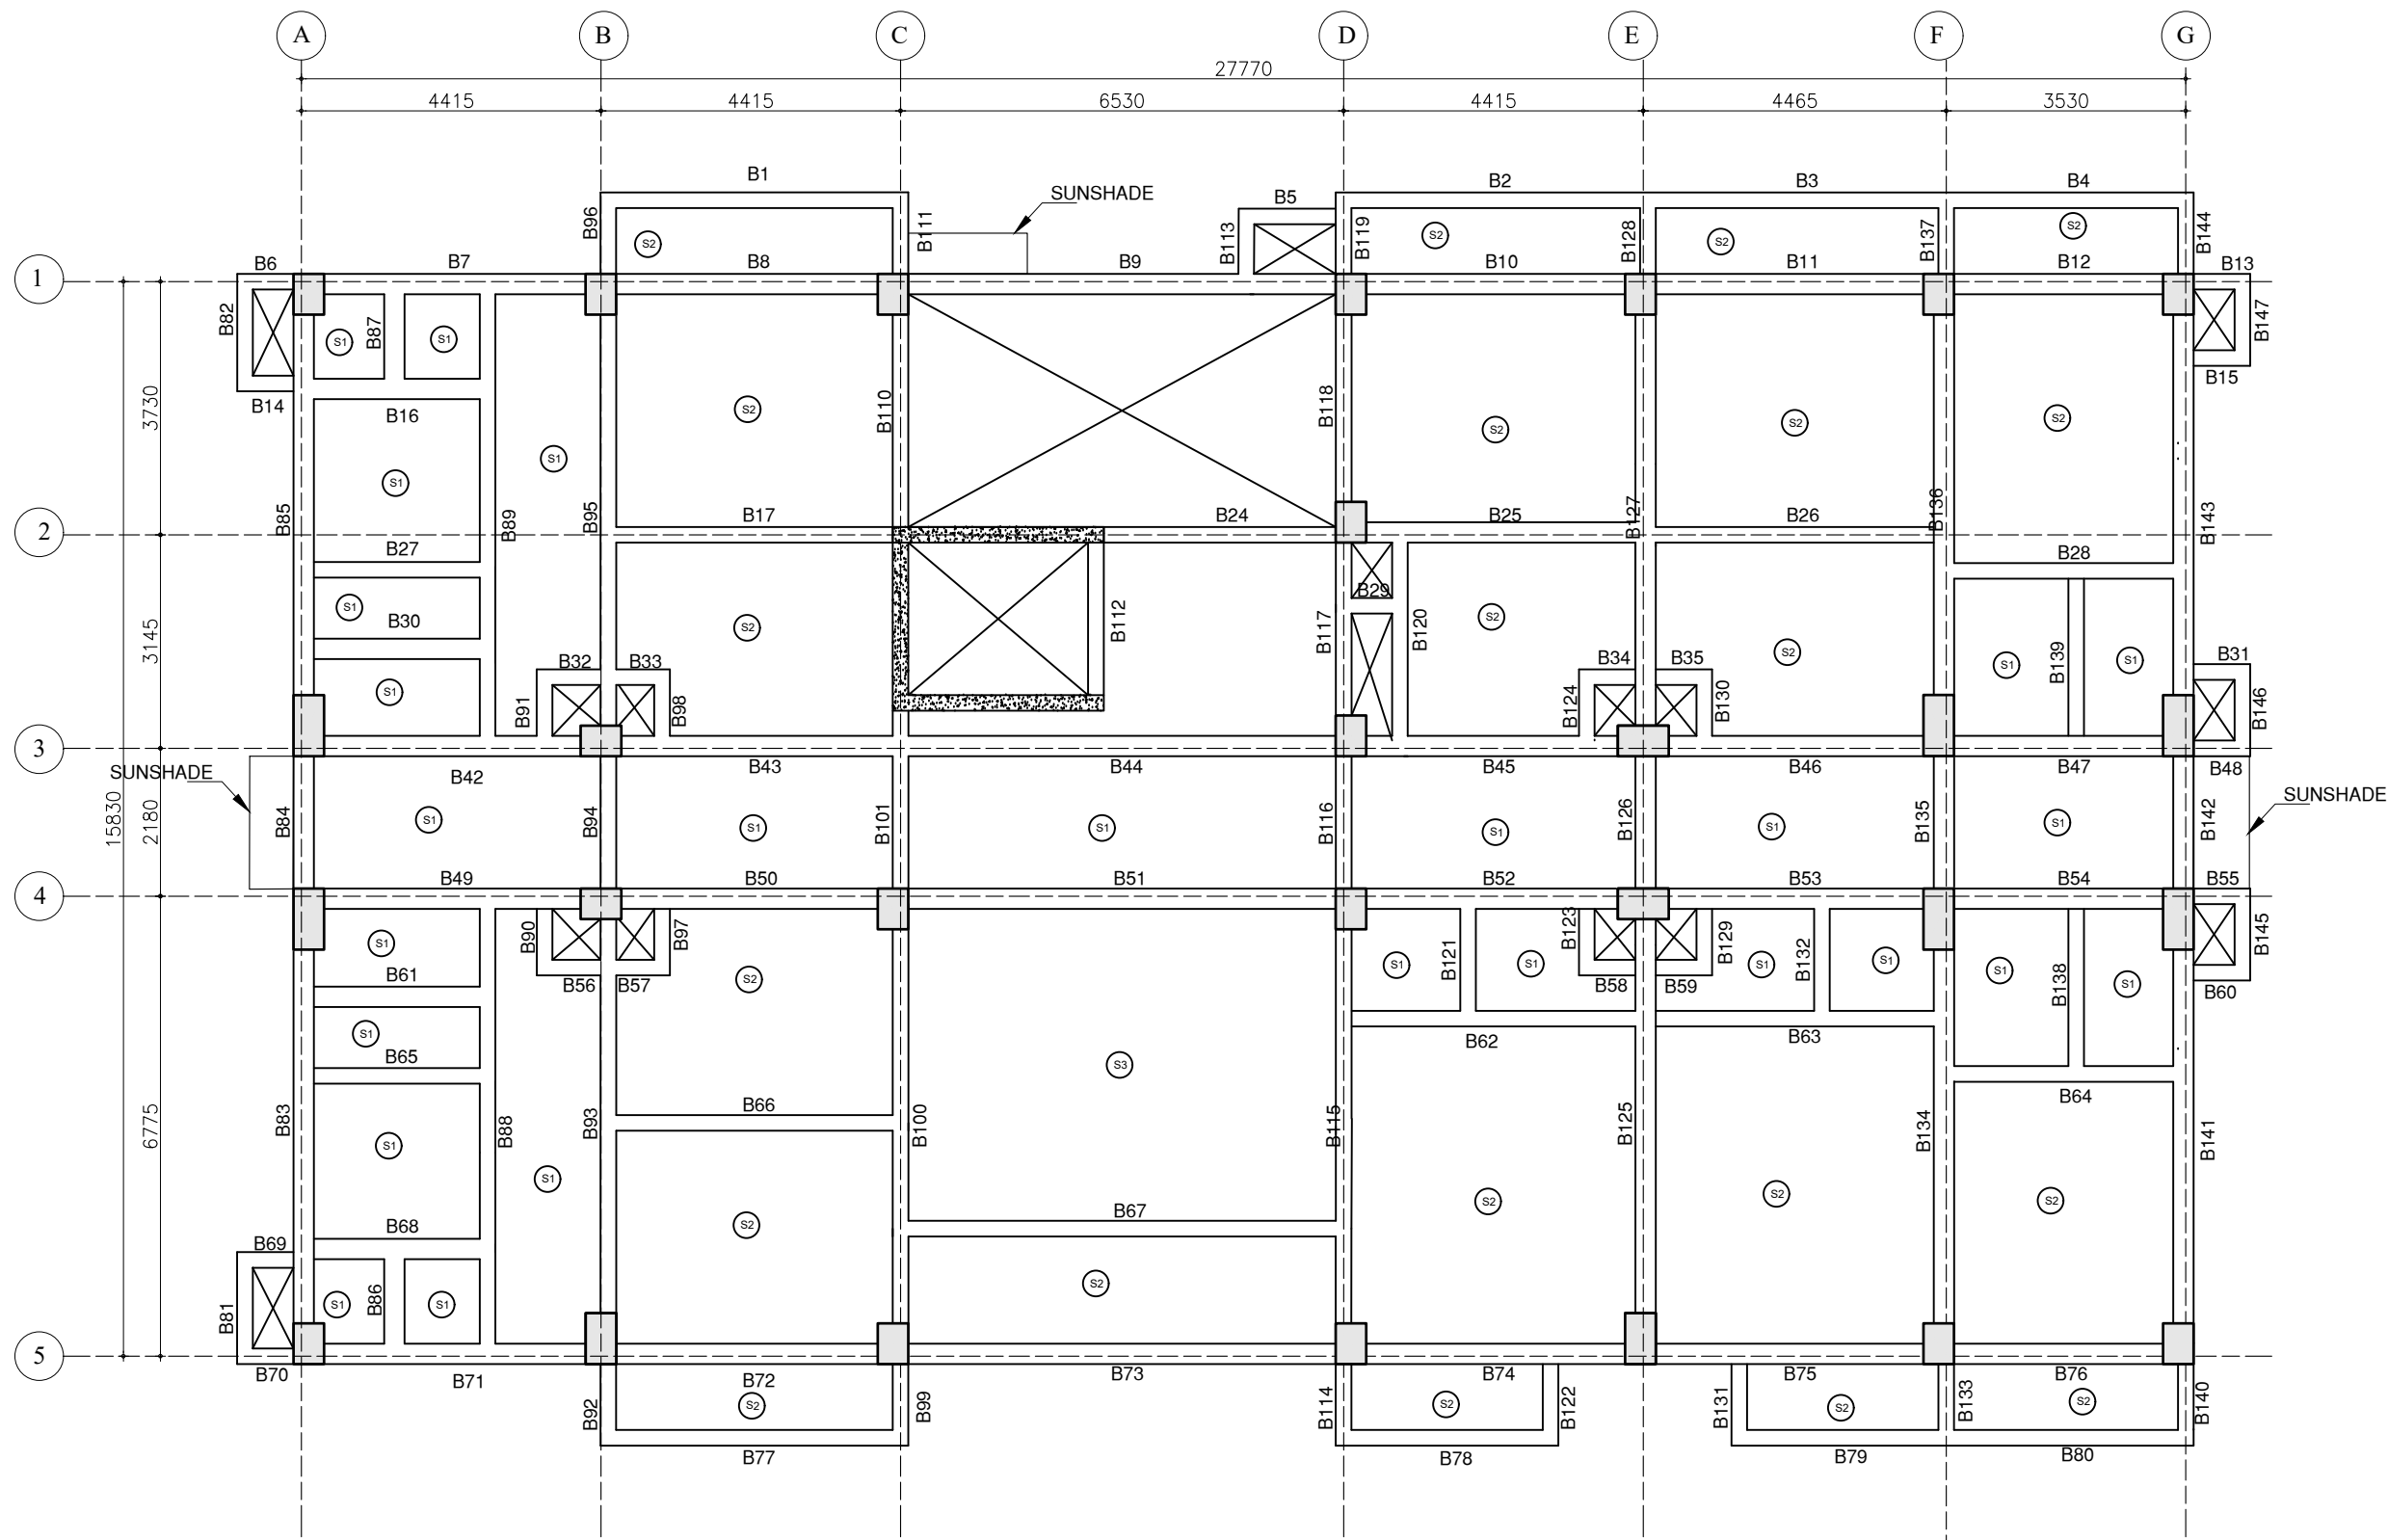

TYPICAL SUNSHADE SECTION

FIRST FLOOR BEAM LAYOUT PLAN

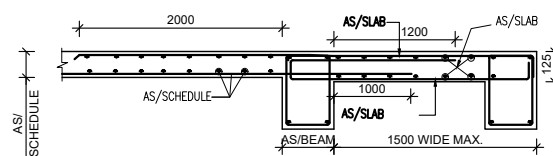

TYPICAL DETAIL FOR BALCONY

SLABS SCHEDULE DETAILS

S.NO	SLAB MARK	SLAB THICK	REINFORCEMENT			
			BOTTOM THRU BARS		TOP BARS	
			ALONG SHORT SPAN	ALONG LONG SPAN.	ALONG SHORT SPAN	ALONG LONG SPAN.
1.	S1	125	8@150C/C	8@150C/C	8@150C/C	8@150C/C
2.	S2	125	8@125C/C	8@125C/C	8@125C/C	8@125C/C
3.	S3	150	8@100C/C	8@100C/C	8@100C/C	8@100C/C

NOTES:-

- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
- THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
- DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
- WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
- REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED FOR ALL RCC WORK.
- REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
- ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
- LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d_b OF BAR FOR M30 GRADE OF CONCRETE. LAPS SHALL BE STAGGERED. NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
- CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM. COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
- ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
- CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
- THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
- PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
- CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPCS/BOO.
- THE BUILDING HAS BEEN DESIGNED FOR G+3. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
- FOR 600C RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT. SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.

TENDER DRAWING

CLIENT  **OIL INDIA LIMITED**
(A Govt. of India Enterprise)

CONSULTANT  **RITES**
THE INFRASTRUCTURE PEOPLE
(A Govt. of India Enterprise)


PROJECT **BQ WORKMEN HOUSING**

BUILDING **GUEST HOUSE BUILDING (G+3)**

DRAWING TITLE **BEAM LAYOUT PLAN AT FIRST FLOOR LEVEL**

DRG. NO. **BITES/BLD/STR/TD/GH(G+3)/118**

NORTH  SCALE **NTS** DATE **AUGUST 2025**

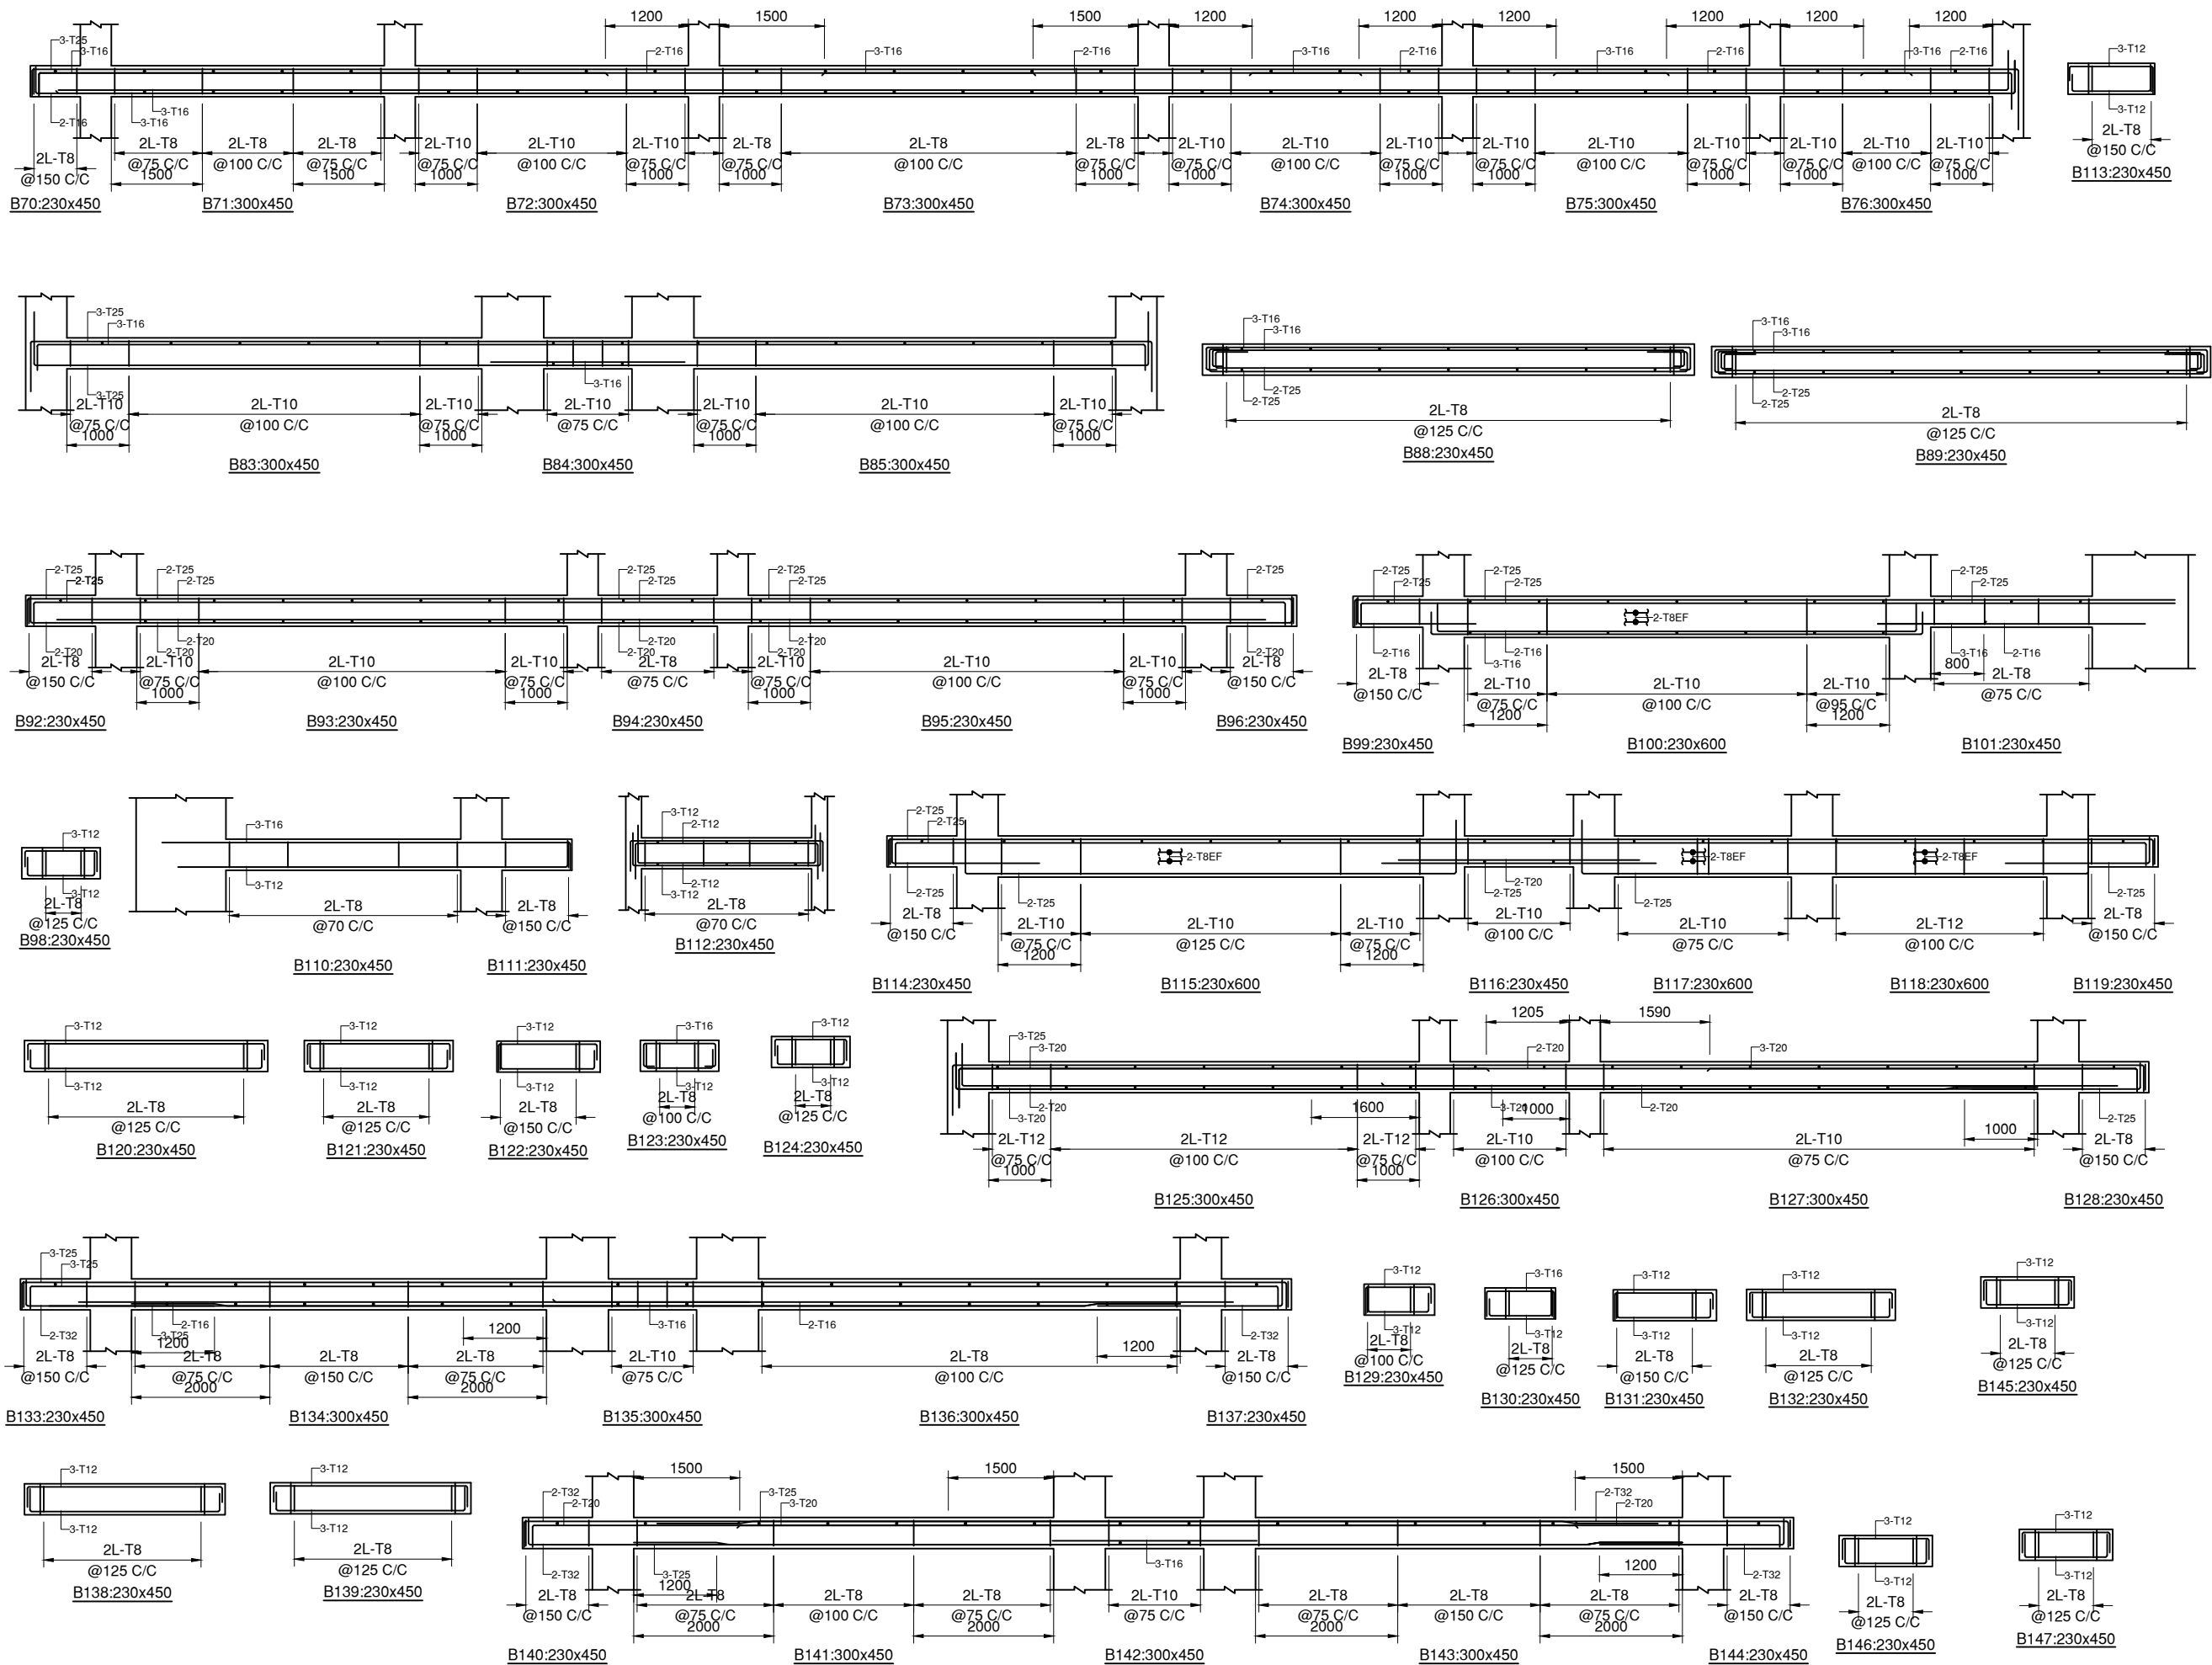


NOTES:-


- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
- THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
- DILY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
- WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
- REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED FOR ALL RCC WORK.
- REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
- ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
- LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47 ϕ OF BAR FOR M30 GRADE OF CONCRETE. LAPS SHALL BE STAGGERED. NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
- CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
- ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
- CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
- THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
- PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
- CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPCS/BOO.
- THE BUILDING HAS BEEN DESIGNED FOR G+3. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
- FOR 6000 RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT.
- SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.

TENDER DRAWING


CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	GUEST HOUSE BUILDING (G+3)	
DRAWING TITLE	FIRST FLOOR BEAMS REINFORCEMENT DETAILS	
DRG. NO.	MITES/BLD/STR/TD/GH(G+3)/120	
NORTH	SCALE	DATE
	NTS	AUGUST 2025

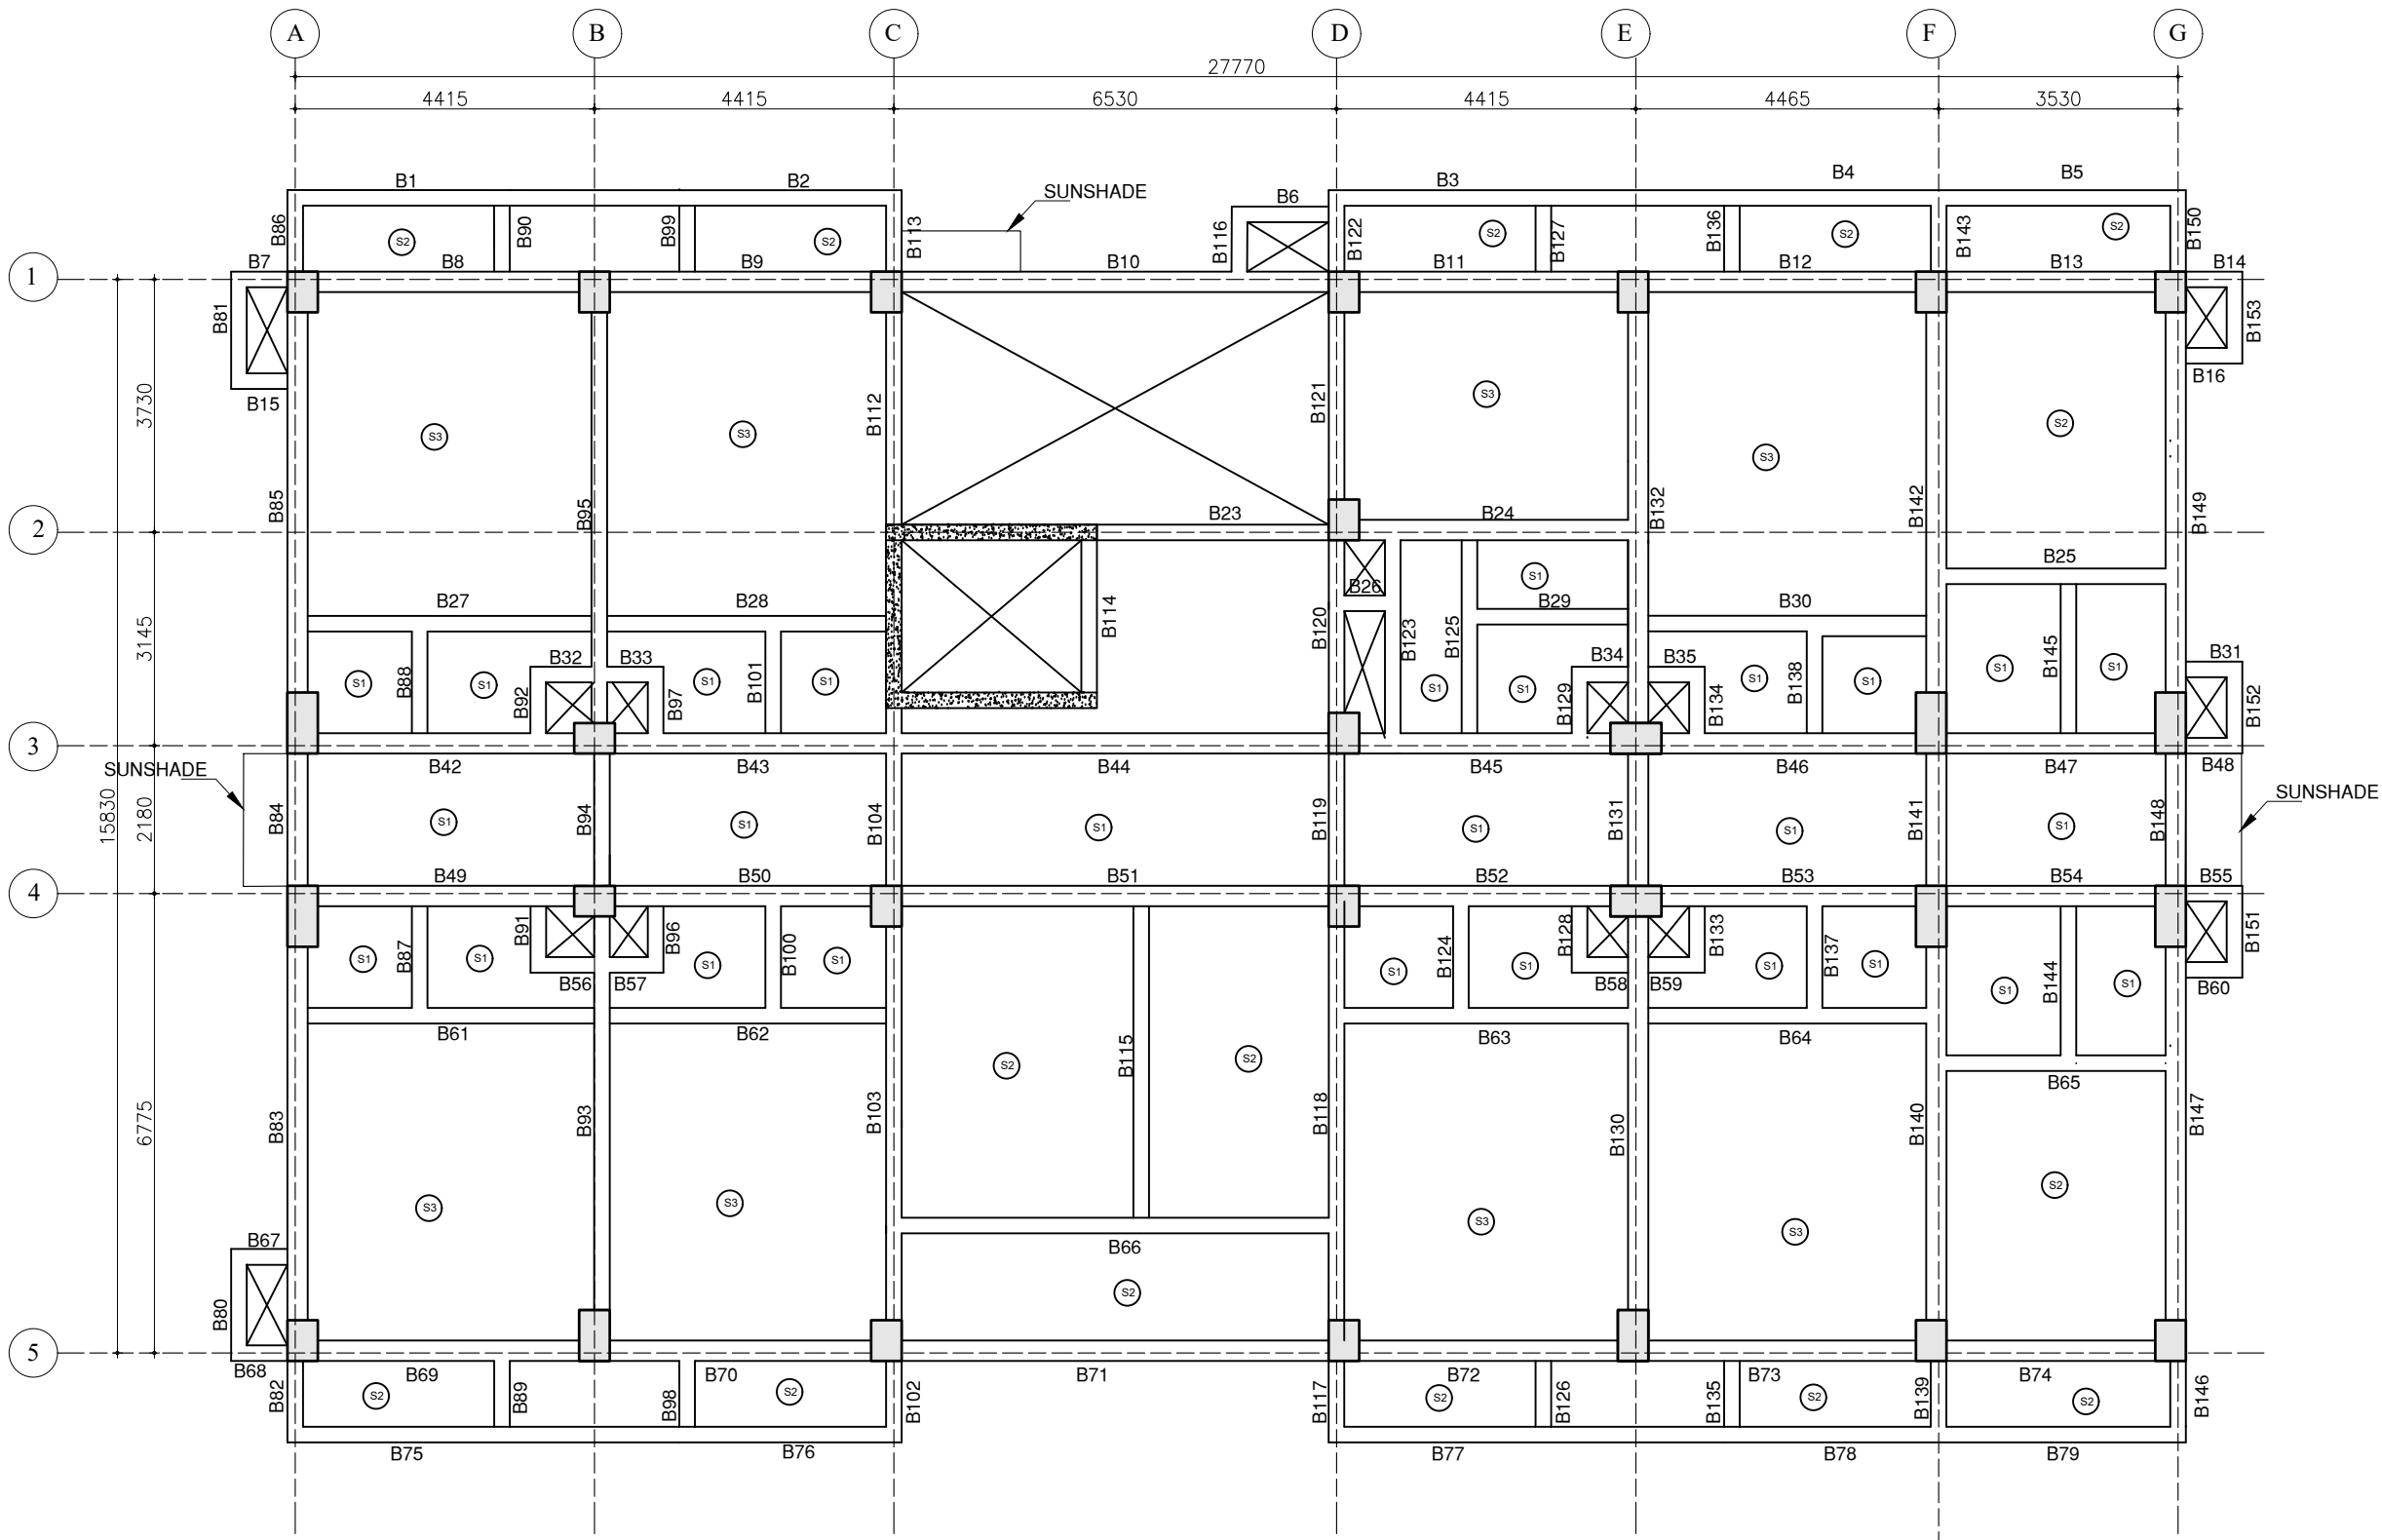

SECOND AND THIRD FLOOR BEAM LAYOUT PLAN

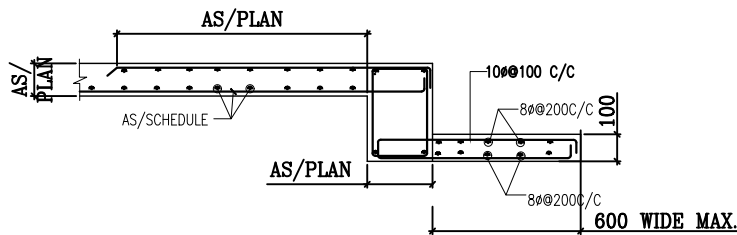

TYPICAL SUNSHADE SECTION

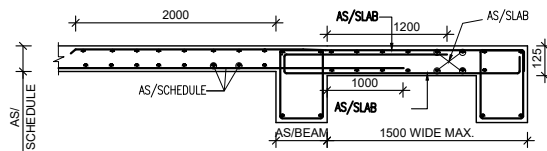

TYPICAL DETAIL FOR BALCONY

SLABS SCHEDULE DETAILS


S.NO	SLAB MARK	SLAB THICK	REINFORCEMENT			
			BOTTOM THRU BARS		TOP BARS	
			ALONG SHORT SPAN	ALONG LONG SPAN	ALONG SHORT SPAN	ALONG LONG SPAN
1.	S1	125	8@150C/C	8@150C/C	8@150C/C	8@150C/C
2.	S2	125	8@125C/C	8@125C/C	8@125C/C	8@125C/C
3.	S3	125	8@100C/C	8@100C/C	8@100C/C	8@100C/C

NOTES:-

- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
- THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
- DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
- WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
- REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED FOR ALL RCC WORK.
- REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
- ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
- LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d_{ia} OF BAR FOR M30 GRADE OF CONCRETE. LAPS SHALL BE STAGGERED. NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
- CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
- ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
- CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
- THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
- PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
- CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920.
- ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPCS/BOO.
- THE BUILDING HAS BEEN DESIGNED FOR G+3. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
- FOR 6000 RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT.
- SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.

TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	GUEST HOUSE BUILDING (G+3)	
DRAWING TITLE	BEAM LAYOUT PLAN AT SECOND AND THIRD FLOOR LEVEL	
DRG. NO.	MITES/BLD/STR/TD/GH(G+3)/121	
NORTH	SCALE	DATE
	NTS	AUGUST 2025

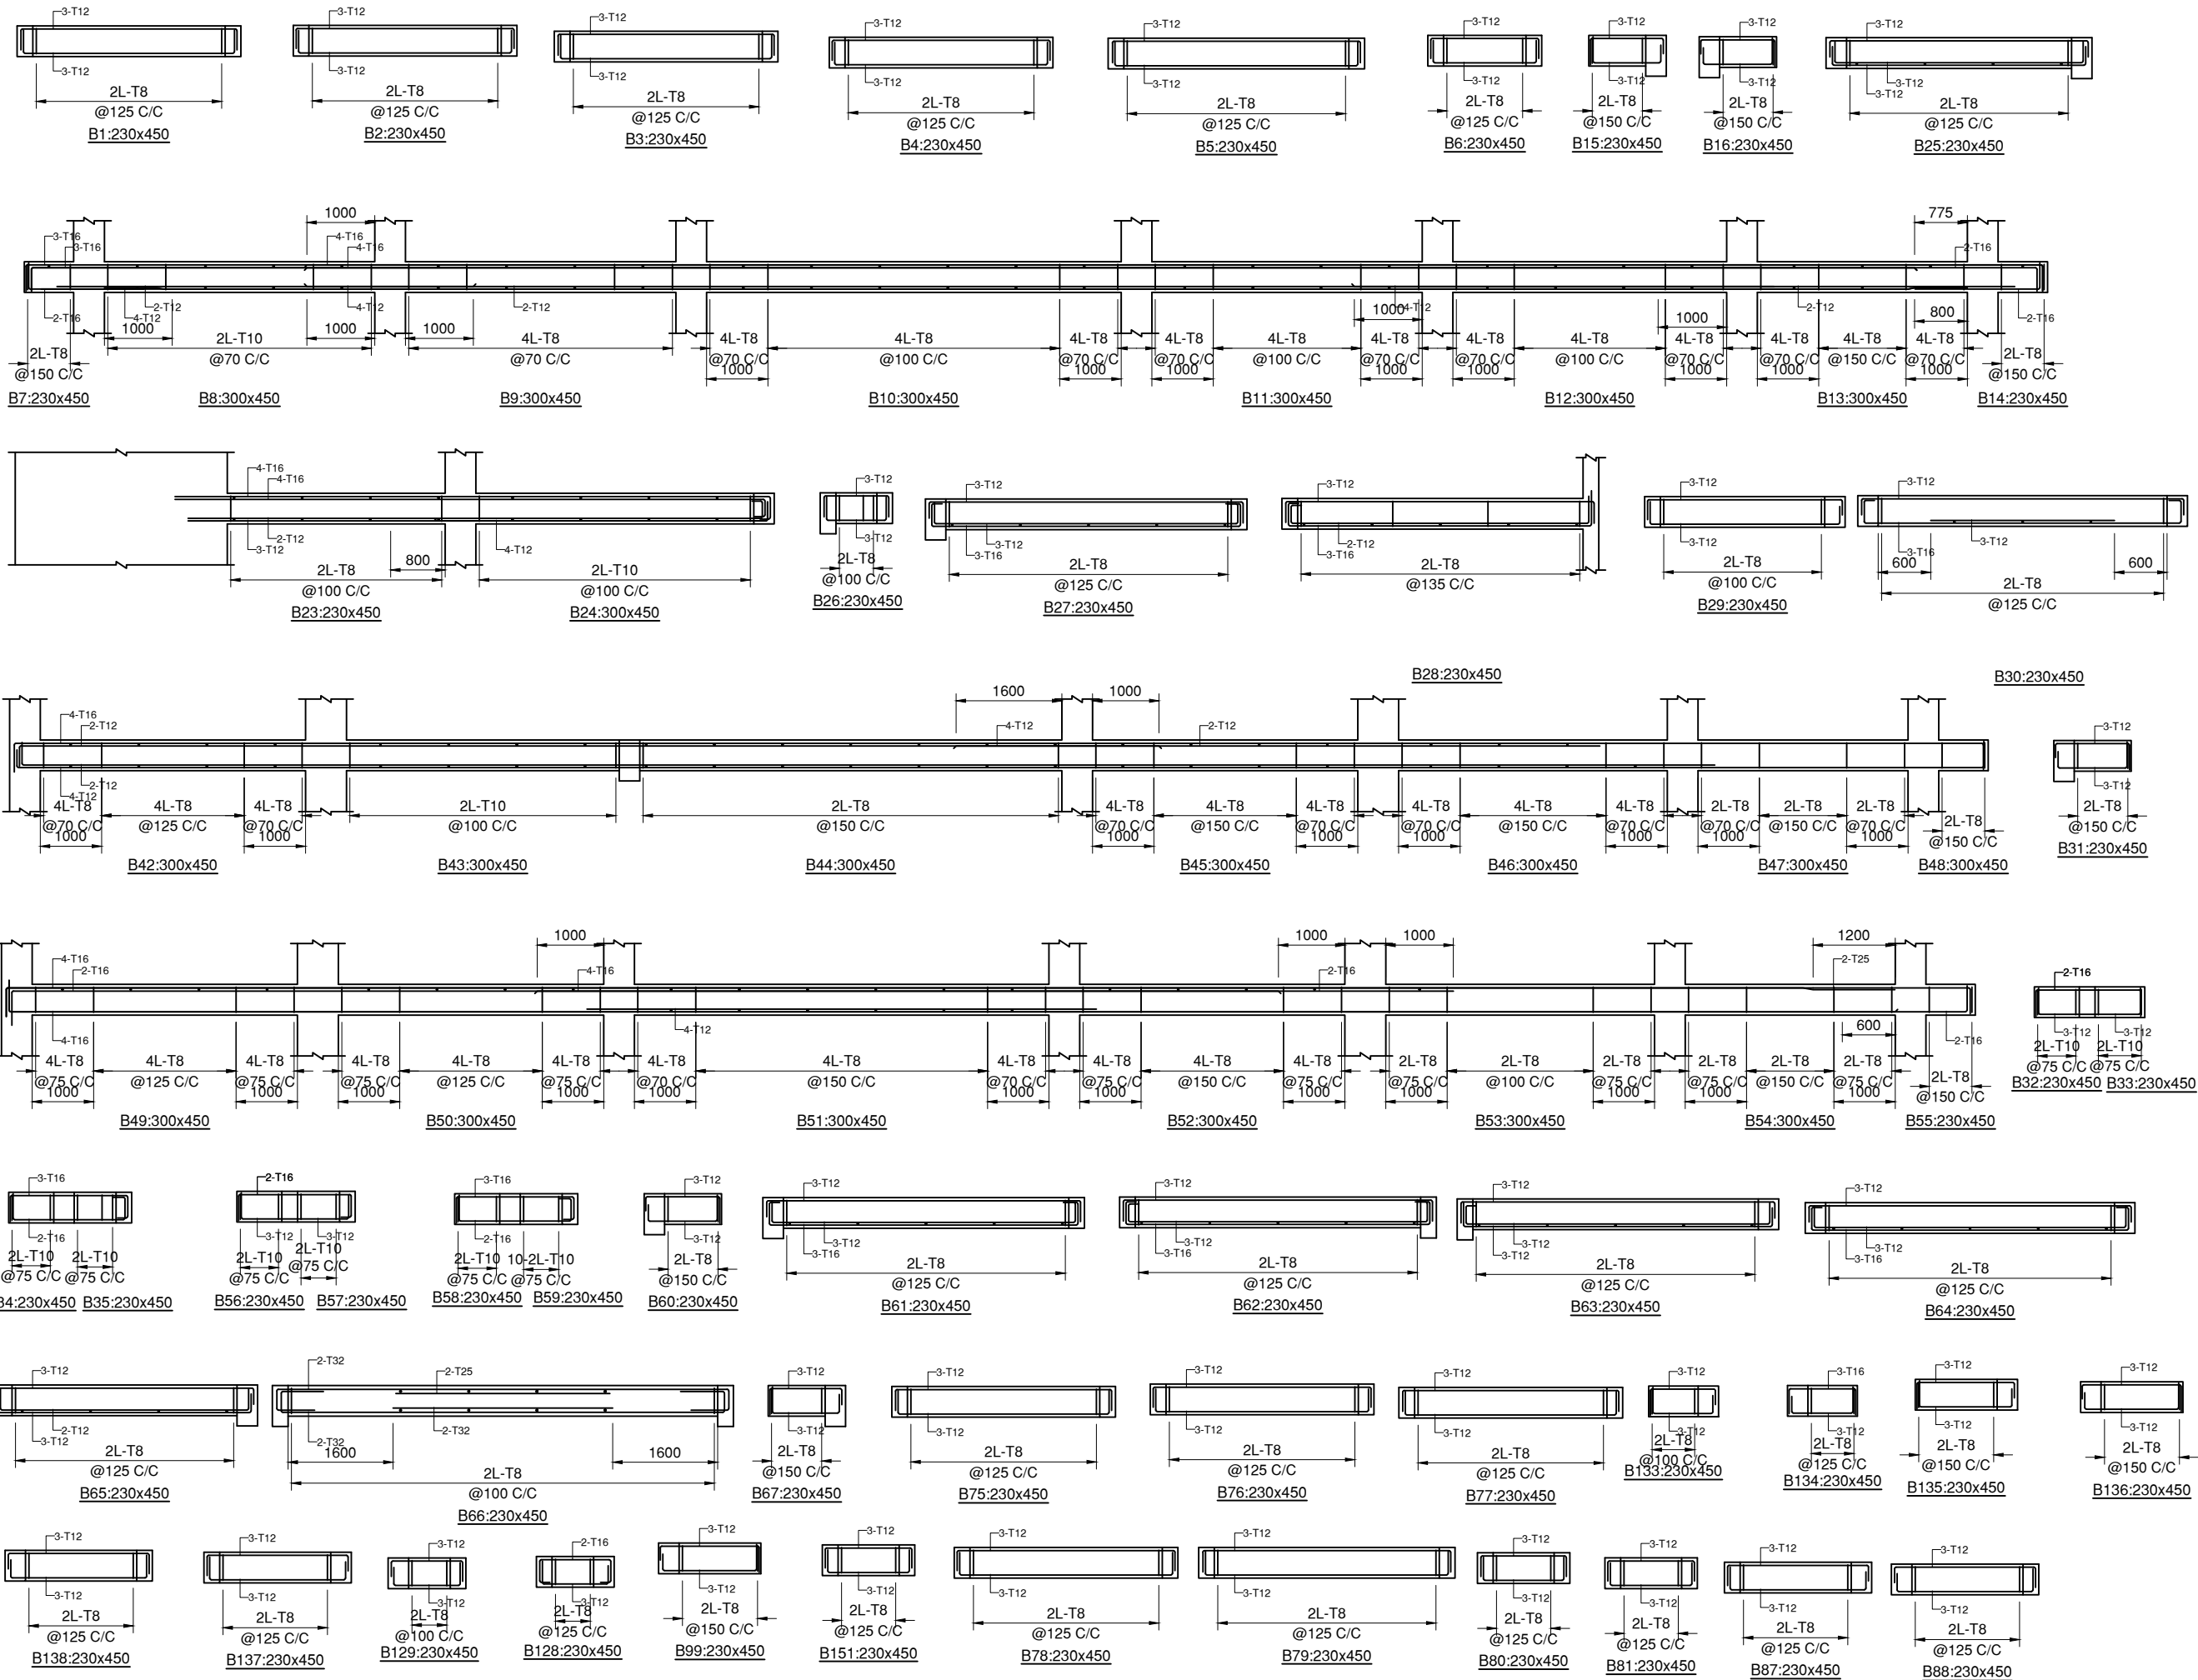

NOTES:-

1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.

2. THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.

3. DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.

4. WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.

5. REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED FOR ALL RCC WORK.

6. REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.

7. ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM

8. LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d OF BAR FOR M30 GRADE OF CONCRETE. LAPS SHALL BE STAGGERED. NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.

9. CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.

10. LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.

11. CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.

12. THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.

13. PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.

14. CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOO.

15. THE BUILDING HAS BEEN DESIGNED FOR G+3. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.

16. FOR 6000 RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT. SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.

TENDER DRAWING

CLIENT



OIL INDIA LIMITED
(A Govt. of India Enterprise)

CONSULTANT



RITES
THE INFRASTRUCTURE PEOPLE
(A Govt. of India Enterprise)

PROJECT

BQ WORKMEN HOUSING

BUILDING

GUEST HOUSE BUILDING (G+3)

DRAWING TITLE

SECOND AND THIRD FLOOR BEAMS REINFORCEMENT DETAILS

DRG. NO.

RITES/BLD/STR/TD/GH(G+3)/122

NORTH




SCALE

NTS

DATE


AUGUST 2025

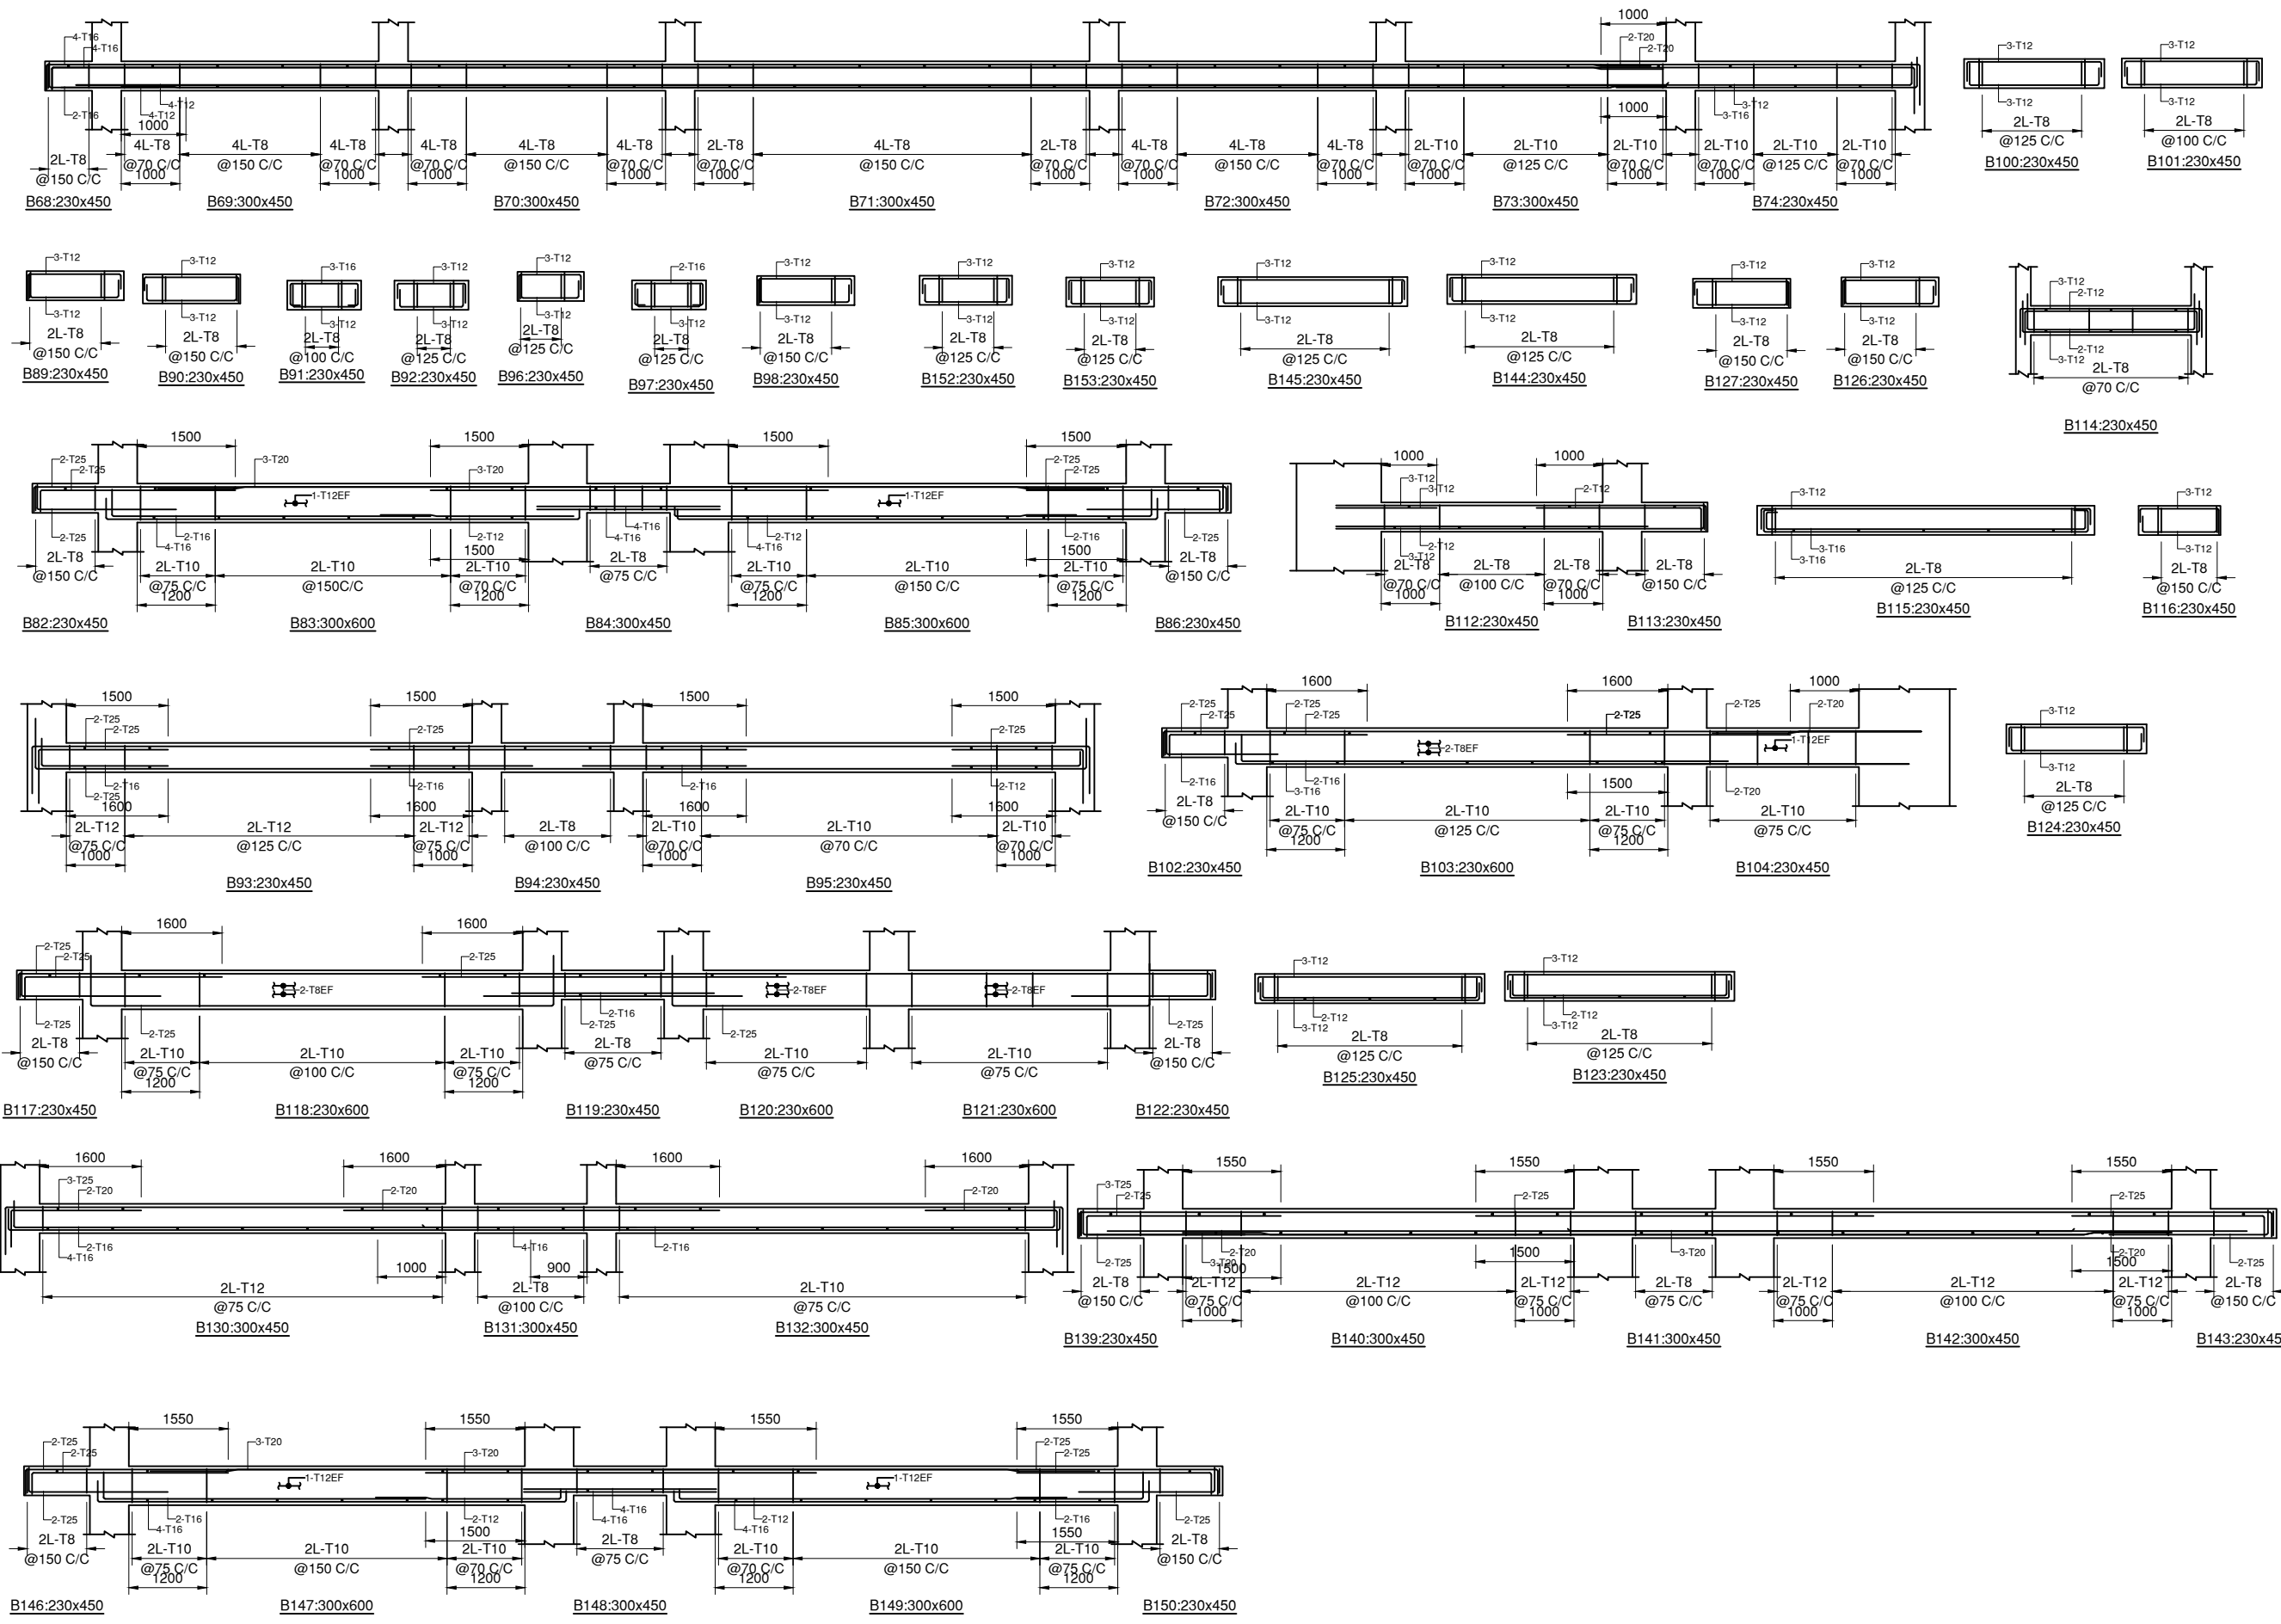

- NOTES:-**
- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
 - THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
 - DUTY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
 - WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
 - REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED FOR ALL RCC WORK.
 - REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
 - ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
 - LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d_b OF BAR FOR M30 GRADE OF CONCRETE. LAPS SHALL BE STAGGERED. NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
 - CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
 - ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
 - CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
 - THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
 - PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
 - CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOO.
 - THE BUILDING HAS BEEN DESIGNED FOR G+3. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
 - FOR 6000 RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT.
 - SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.

TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	GUEST HOUSE BUILDING (G+3)	
DRAWING TITLE	SECOND AND THIRD FLOOR BEAMS REINFORCEMENT DETAILS	
DRG. NO.	MITES/BLD/STR/TD/GH(G+3)/123	
NORTH	SCALE	DATE
	NTS	AUGUST 2025

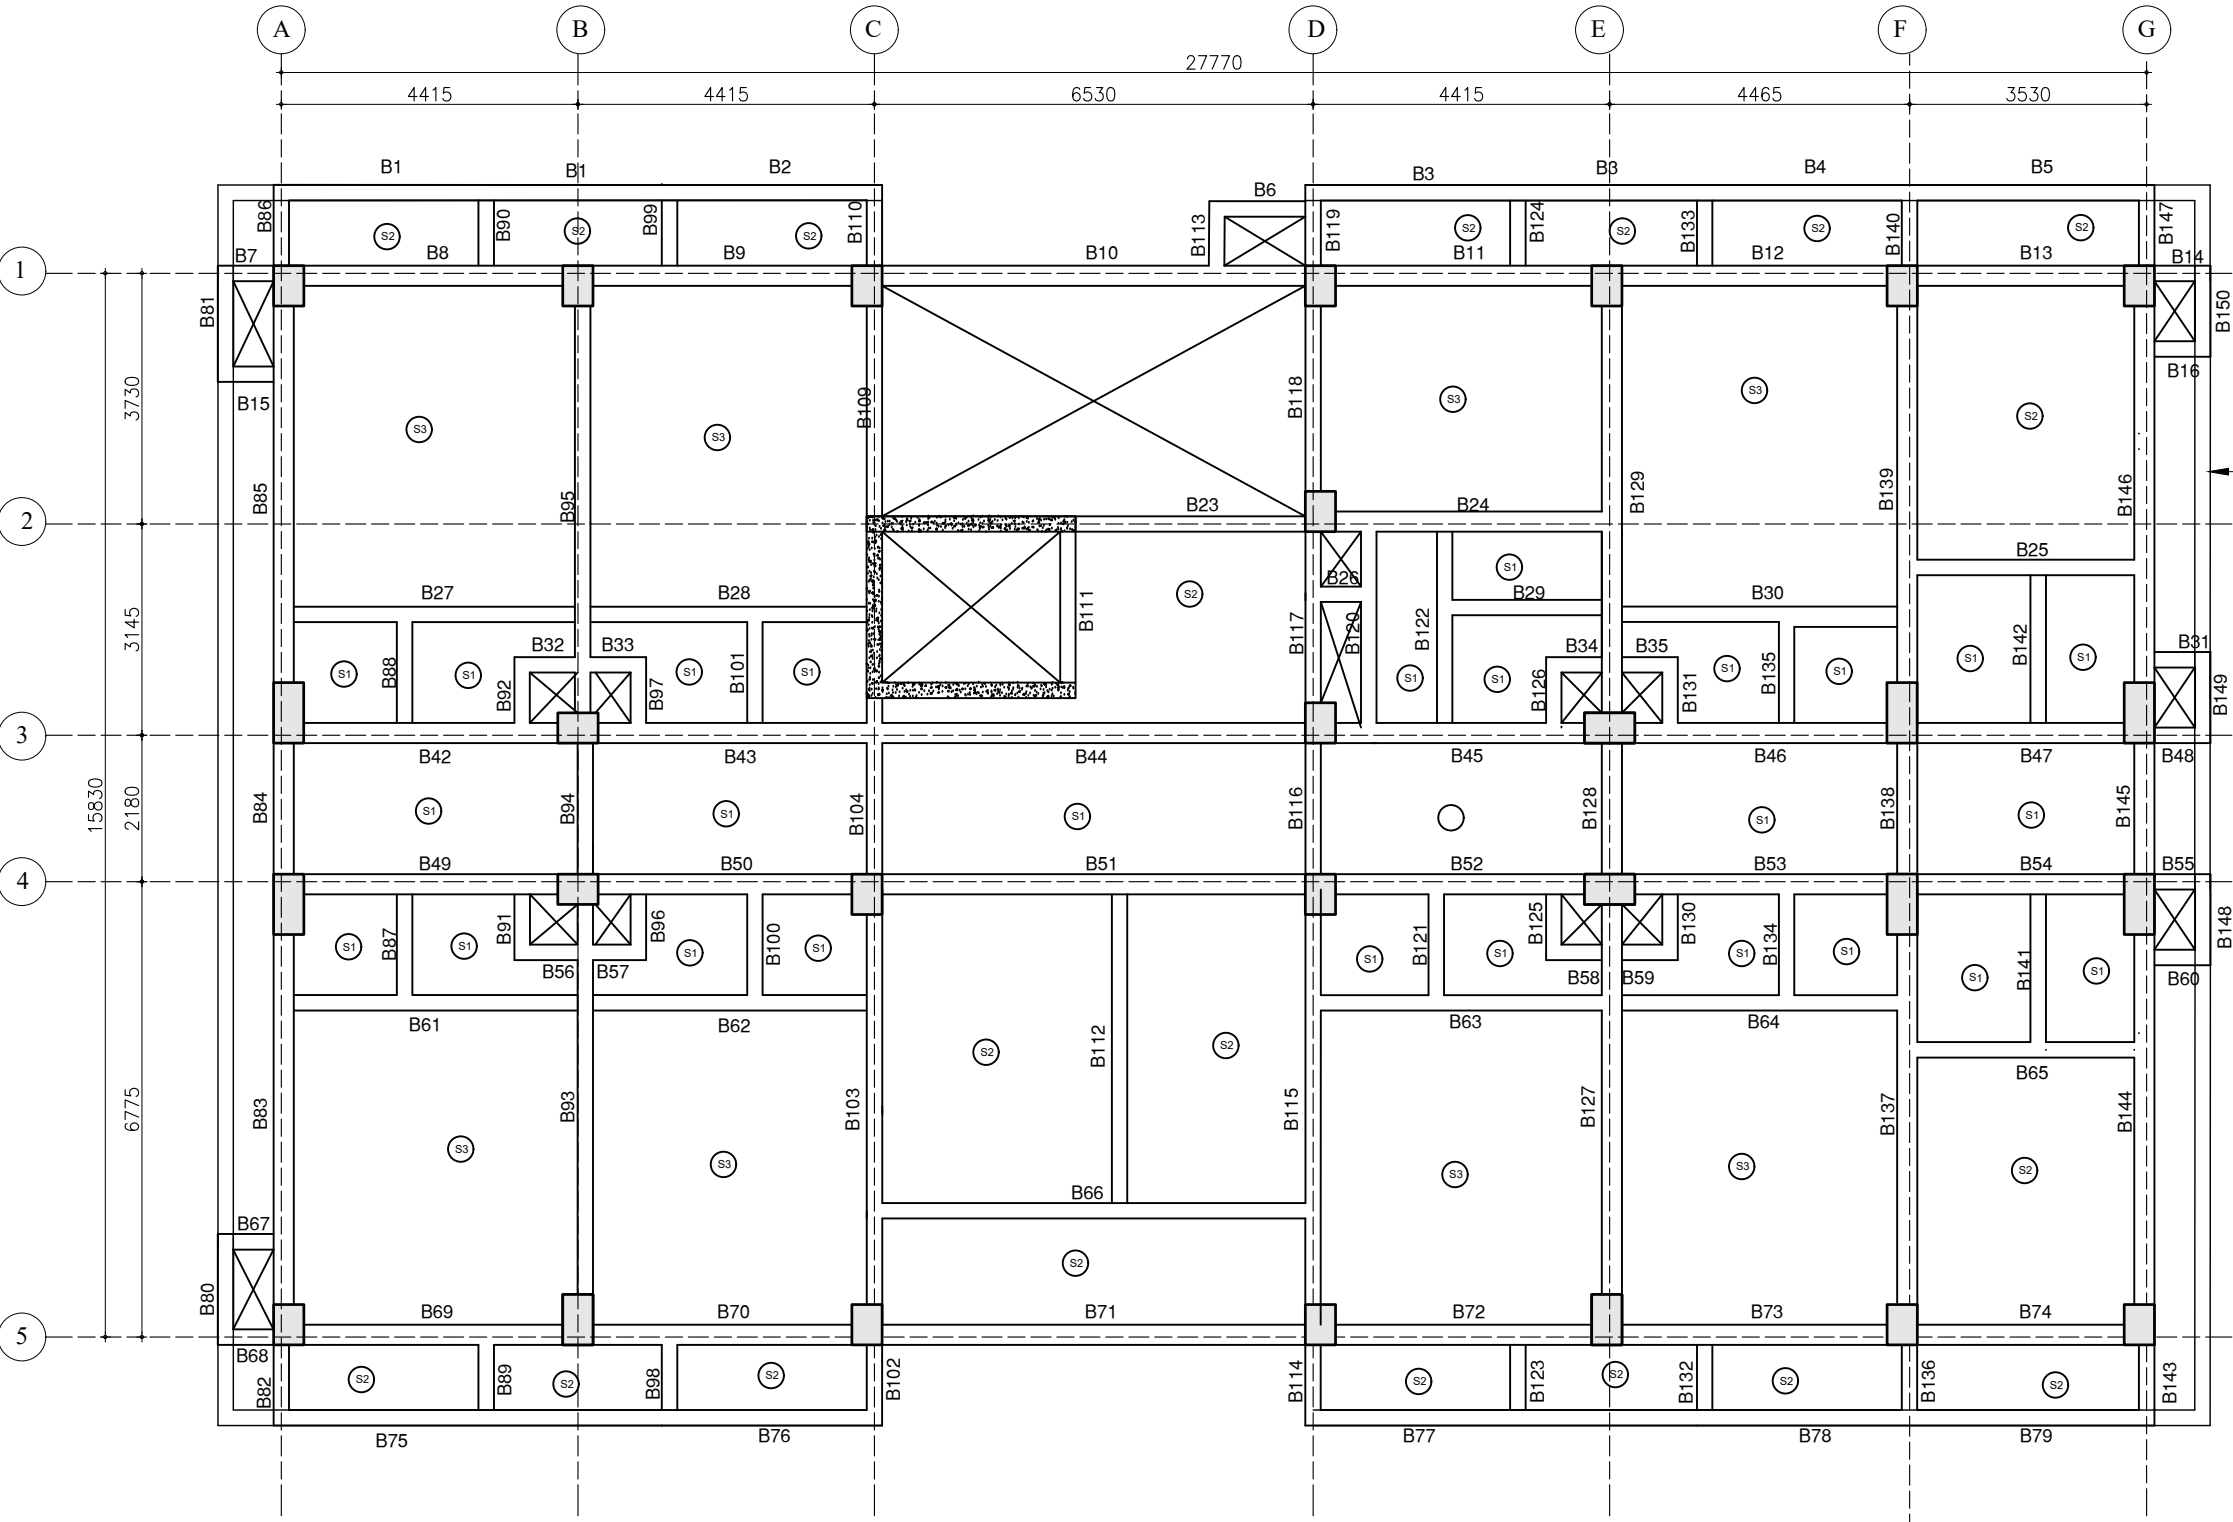

TERRACE BEAM LAYOUT PLAN

SLABS SCHEDULE DETAILS


S.NO	SLAB MARK	SLAB THICK	REINFORCEMENT			
			BOTTOM THRU BARS		TOP BARS	
			ALONG SHORT SPAN	ALONG LONG SPAN.	ALONG SHORT SPAN	ALONG LONG SPAN.
1.	S1	125	8@150C/C	8@150C/C	8@150C/C	8@150C/C
2.	S2	125	8@125C/C	8@125C/C	8@125C/C	8@125C/C
3.	S3	125	8@100C/C	8@100C/C	8@100C/C	8@100C/C

NOTES:-

- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
- THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
- DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
- WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
- REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED FOR ALL RCC WORK.
- REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
- ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
- LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d_{ia} OF BAR FOR M30 GRADE OF CONCRETE. LAPS SHALL BE STAGGERED. NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
- CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
- ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
- CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
- THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
- PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
- CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOO.
- THE BUILDING HAS BEEN DESIGNED FOR G+3. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
- FOR 6000 RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT. SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.

TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)		
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)		
PROJECT	BQ WORKMEN HOUSING		
BUILDING	GUEST HOUSE BUILDING (G+3)		
DRAWING TITLE	BEAM LAYOUT PLAN AT TERRACE LEVEL		
DRG. NO.	MITES/BLD/STR/TD/GH(G+3)/124		
NORTH	SCALE	DATE	
	NTS	AUGUST 2025	

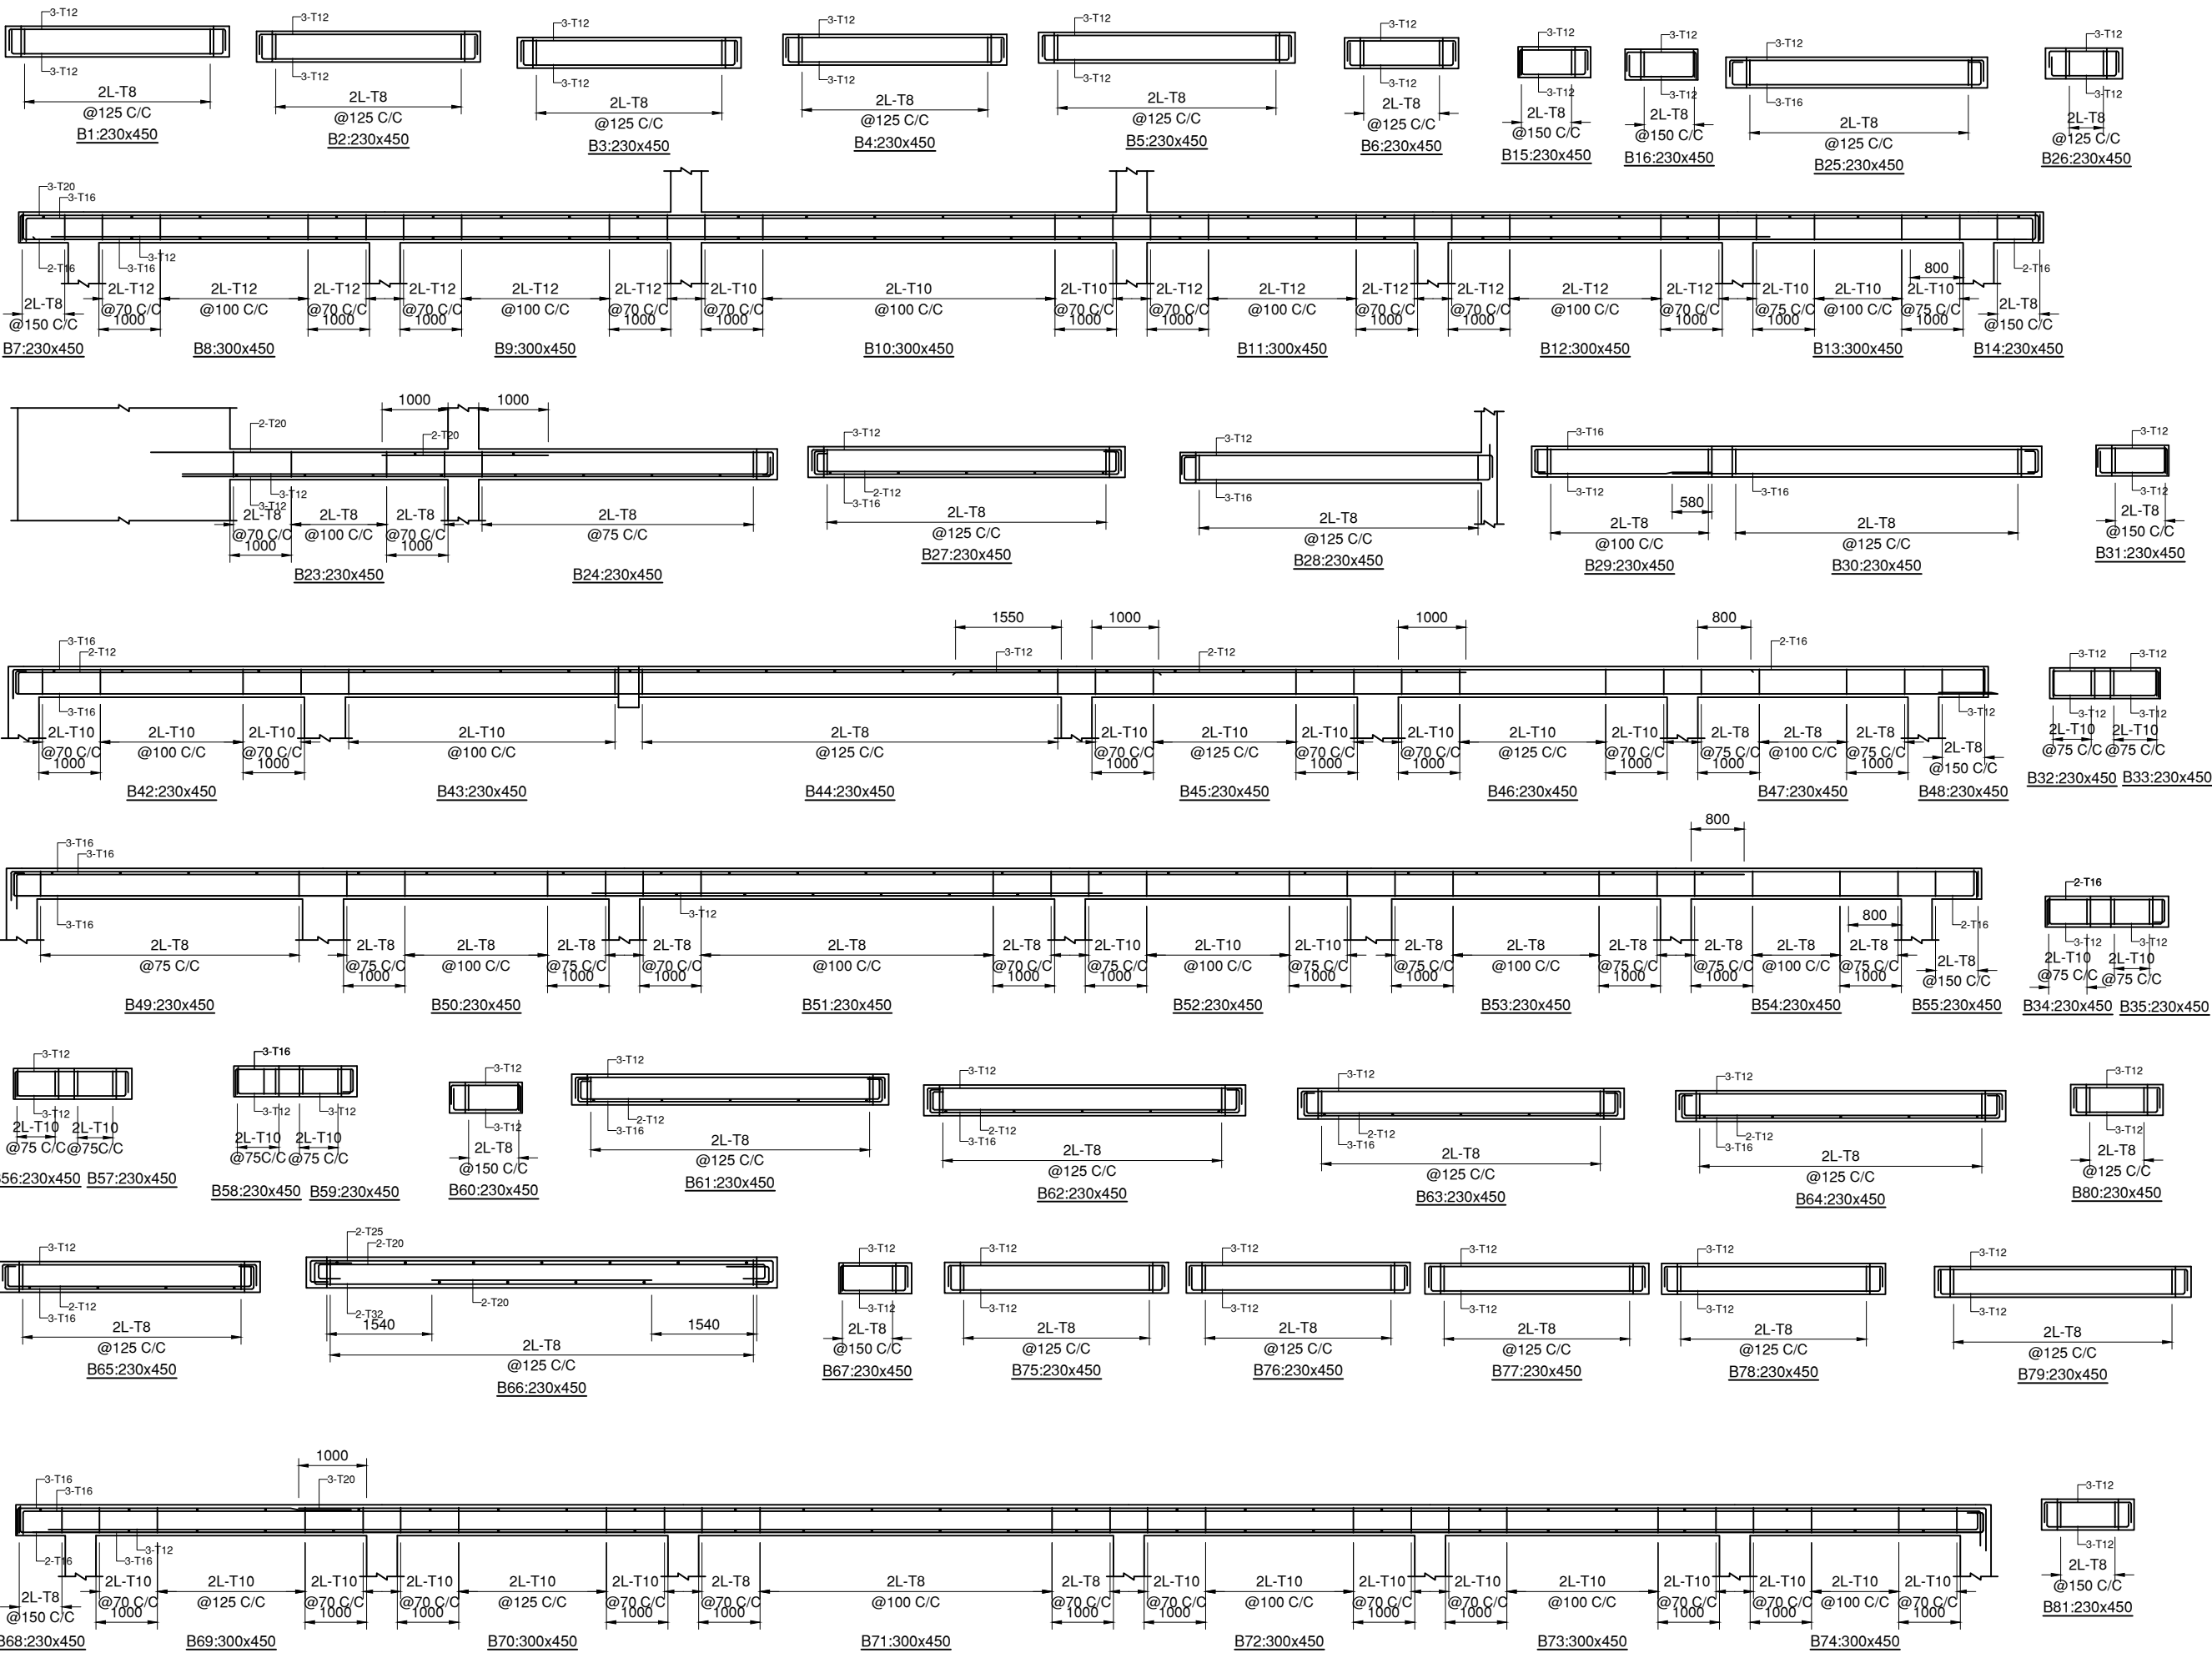




NOTES:-

1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
 2. THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
 3. DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
 4. WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
 5. REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED FOR ALL RCC WORK.
 6. REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
 7. ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
 8. LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47 ϕ dia OF BAR FOR M30 GRADE OF CONCRETE. LAPS SHALL BE STAGGERED. NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
 9. CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM. COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
 10. ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
 11. CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
 12. THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
 13. PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
 14. CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOO.
 15. THE BUILDING HAS BEEN DESIGNED FOR G+3. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
 16. FOR 600 ϕ RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT.
- SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.

TENDER DRAWING




CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)		
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)		
PROJECT	BQ WORKMEN HOUSING		
BUILDING	GUEST HOUSE BUILDING (G+3)		
DRAWING TITLE	BEAM LAYOUT PLAN AT TERRACE LEVEL		
DRG. NO.	MITES/BLD/STR/TD/GH(G+3)/125		
NORTH	SCALE	DATE	
	NTS	AUGUST 2025	

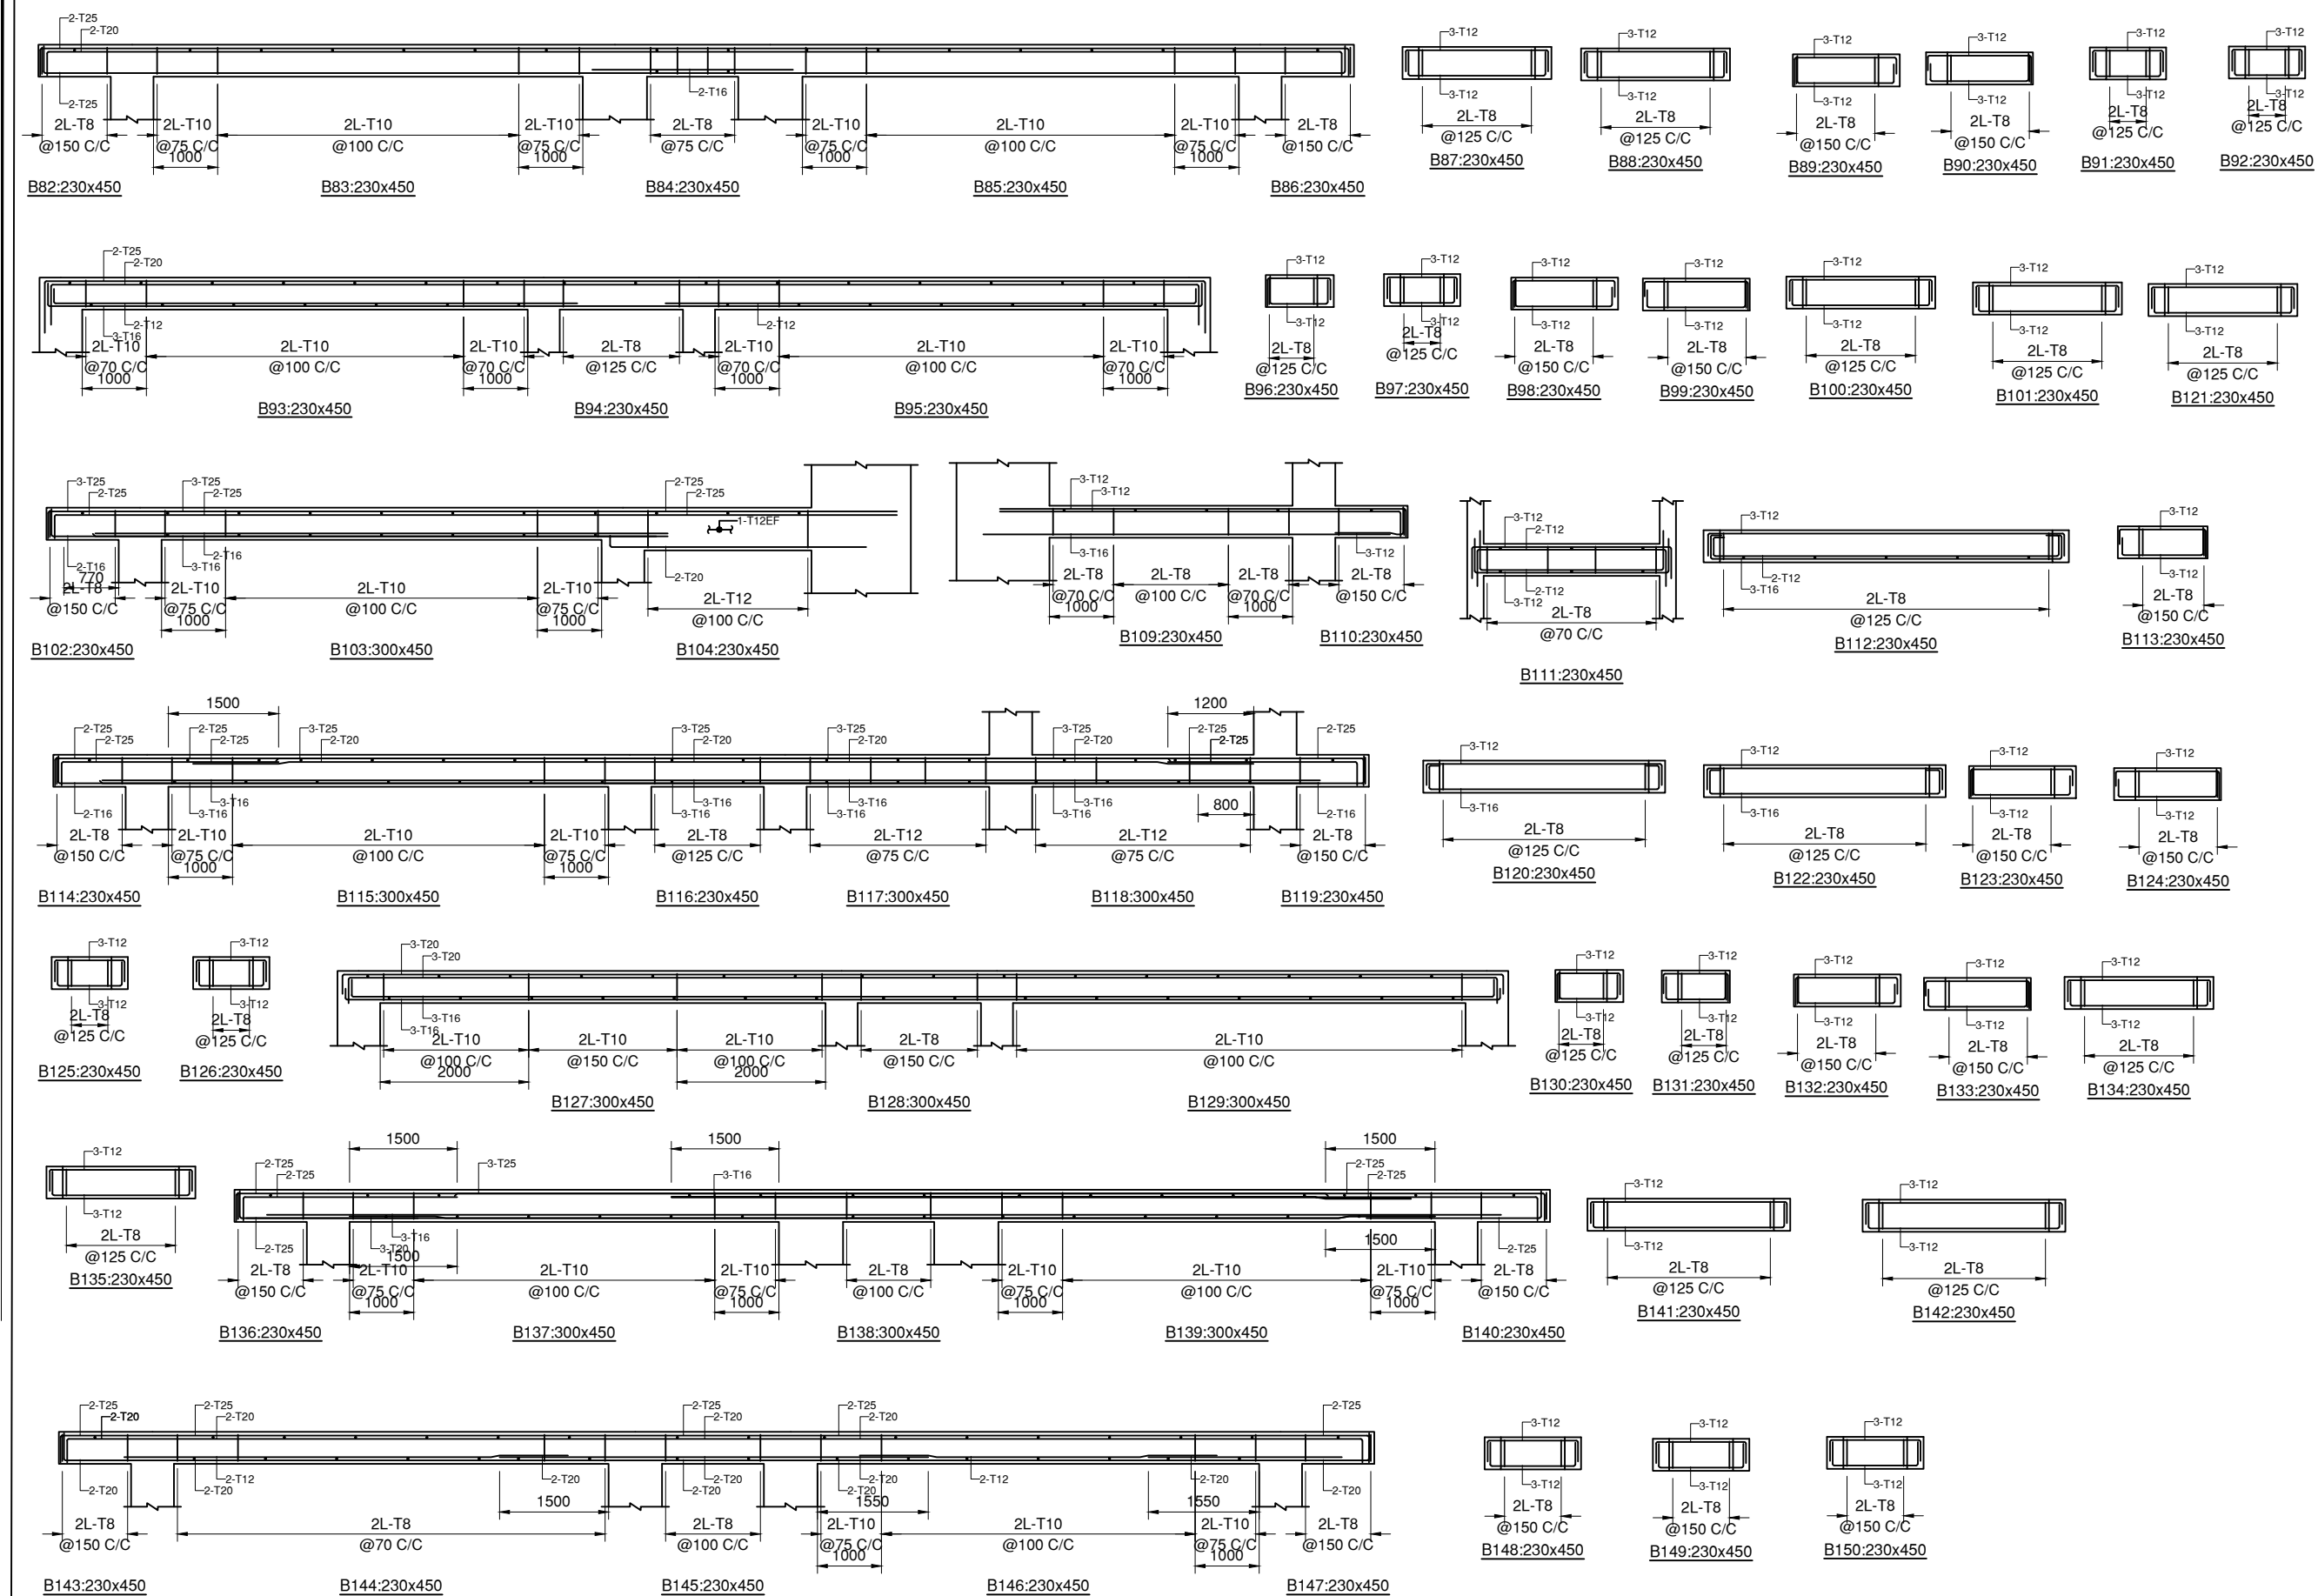



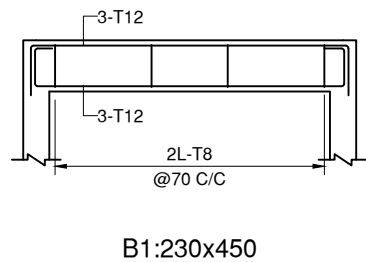
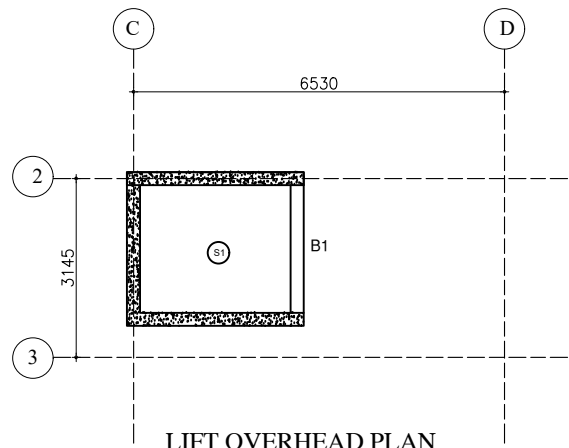


LIFT OVERHEAD LVL. SLABS SCHEDULE DETAILS

S.NO	SLAB MARK	SLAB THICK	REINFORCEMENT			
			BOTTOM THRU BARS		TOP BARS	
			ALONG SHORT SPAN	ALONG LONG SPAN	ALONG SHORT SPAN	ALONG LONG SPAN
1.	S1	125	8@200C/C	8@200C/C	8@200C/C	8@200C/C

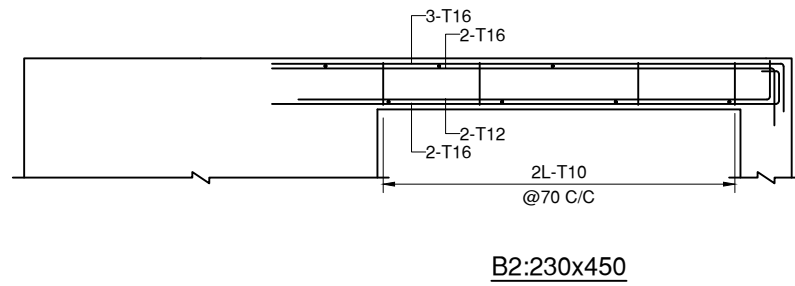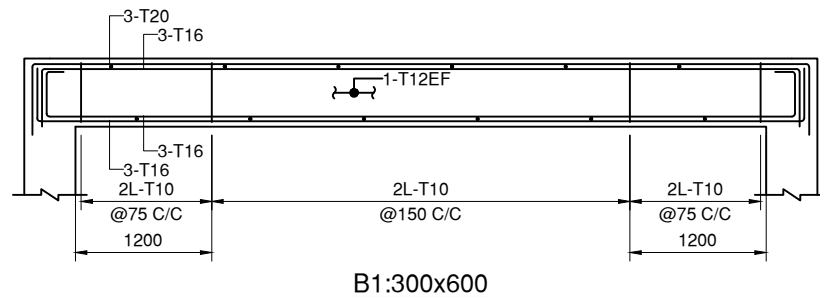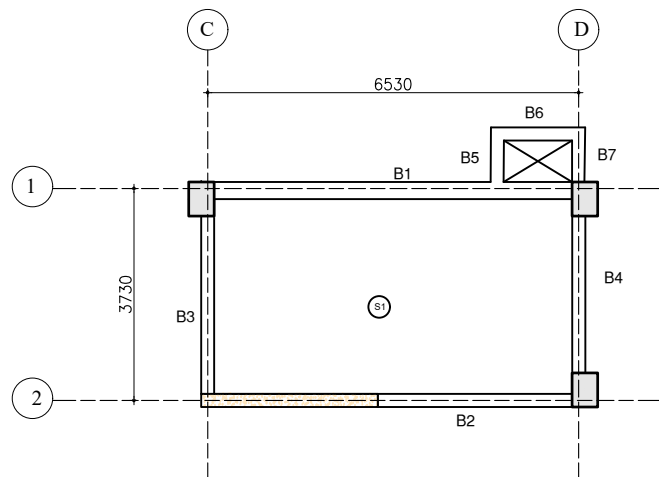

MUMTY LEVEL AND WATER TANK BOTTOM LEVEL PLAN

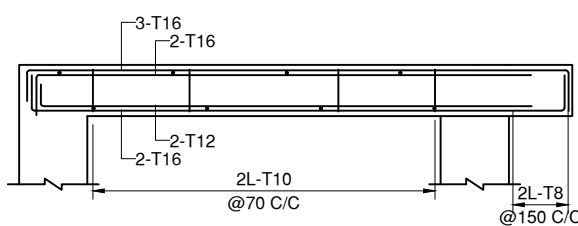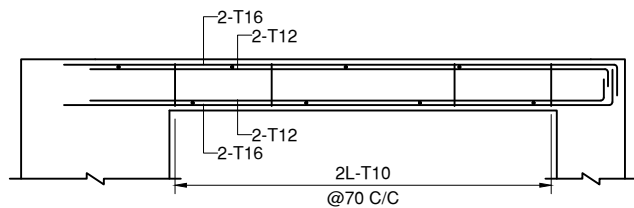

B3:230x450

B4:230x450

B7:230x450

MUMTY LVL. SLABS SCHEDULE DETAILS

S.NO	SLAB MARK	SLAB THICK	REINFORCEMENT			
			BOTTOM THRU BARS		TOP BARS	
			ALONG SHORT SPAN	ALONG LONG SPAN	ALONG SHORT SPAN	ALONG LONG SPAN
1.	S1	125	8@125C/C	8@125C/C	8@125C/C	8@125C/C

WATER TANK BOTTOM SLABS SCHEDULE DETAILS






S.NO	SLAB MARK	SLAB THICK	REINFORCEMENT			
			BOTTOM THRU BARS		TOP BARS	
			ALONG SHORT SPAN	ALONG LONG SPAN	ALONG SHORT SPAN	ALONG LONG SPAN
1.	S1	200	10@100C/C	10@125C/C	10@100C/C	10@125C/C

NOTES:-

- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
- THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
- DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
- WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
- REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED FOR ALL RCC WORK.
- REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
- ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
- LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d_{ia} OF BAR FOR M30 GRADE OF CONCRETE. LAPS SHALL BE STAGGERED. NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
- CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
- ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
- CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
- THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
- PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
- CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920.
- ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOO.
- THE BUILDING HAS BEEN DESIGNED FOR G+3. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
- FOR 6000 RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT.
- SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.

TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	GUEST HOUSE BUILDING (G+3)	
DRAWING TITLE	MUMTY , WATER TANK BOTTOM AND LIFT OVERHEAD DETAILS	
DRG. NO.	BITES/BLD/STR/TD/GH(G+3)/127	
NORTH	SCALE	DATE
	NTS	AUGUST 2025

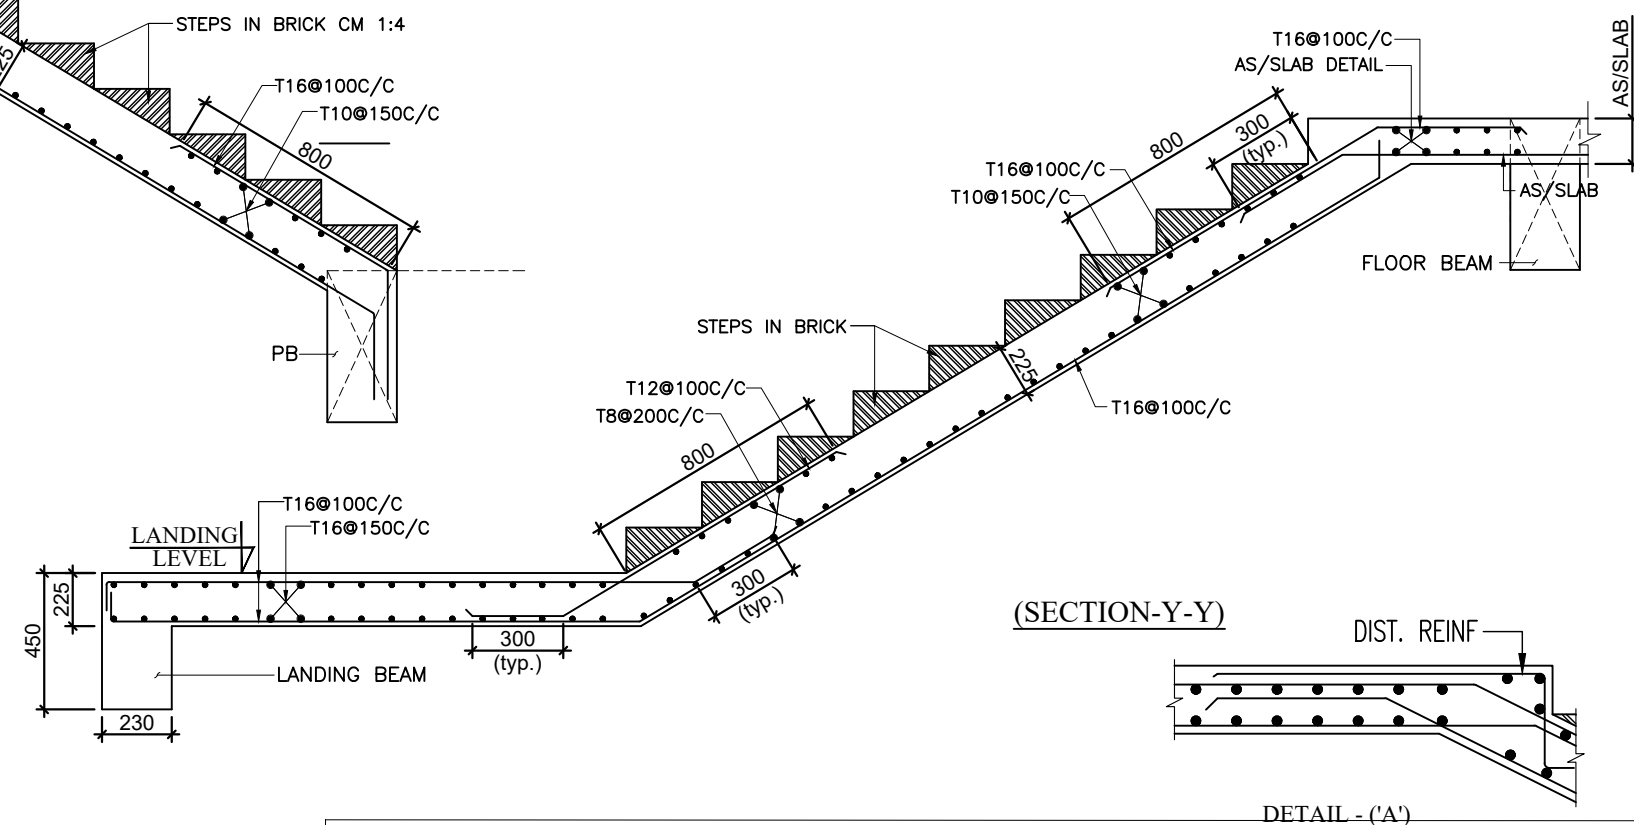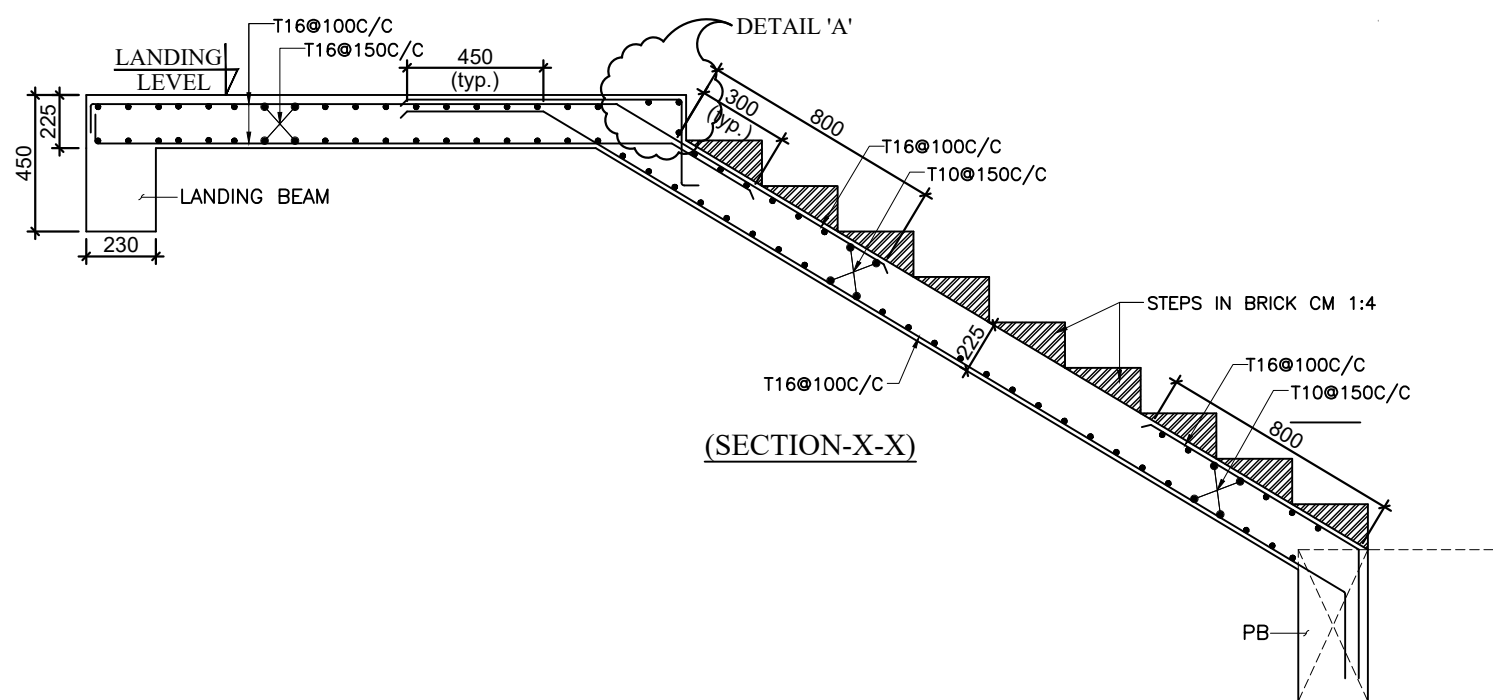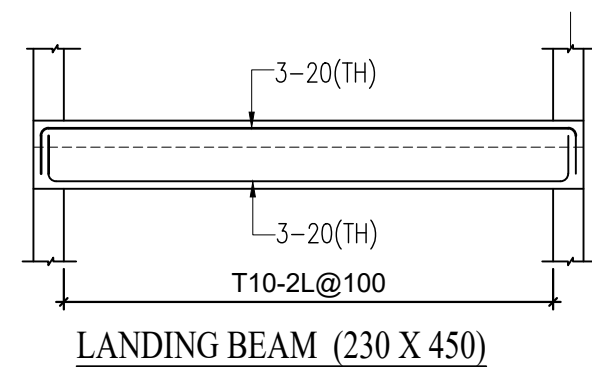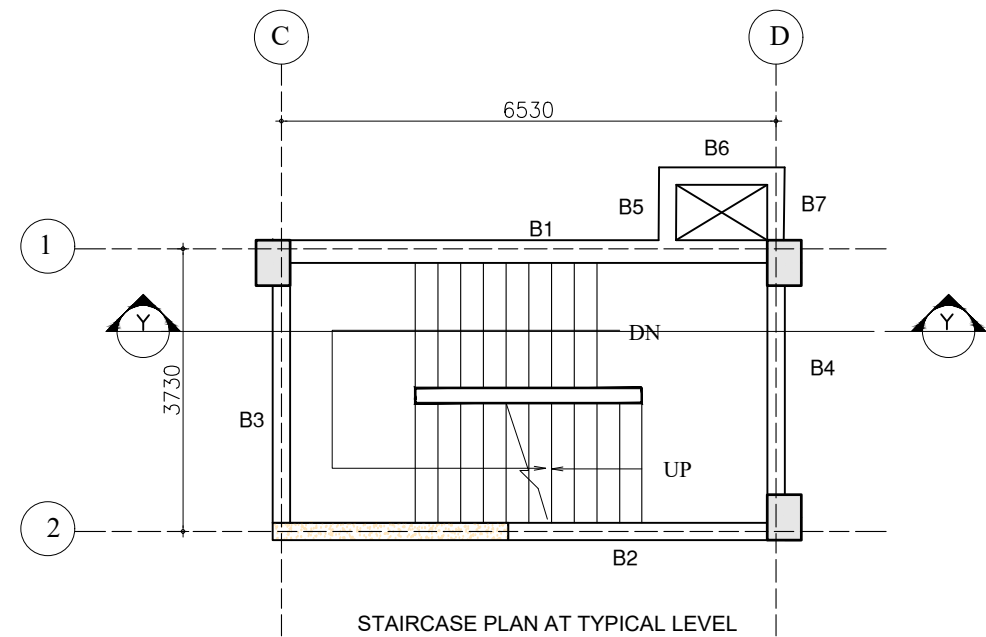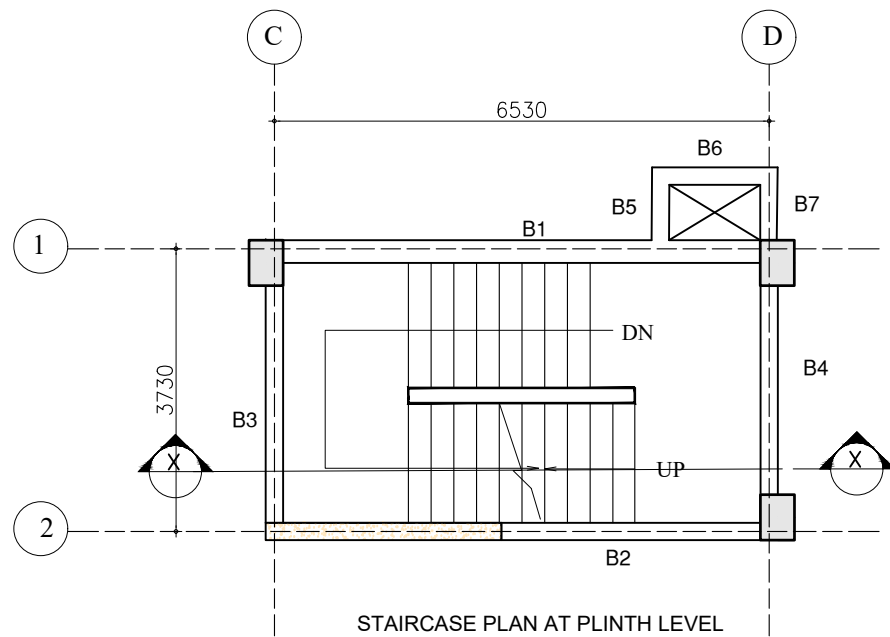


NOTE:-
NUMBER OF STEPS TO BE AS PER ARCHITECTURAL DRAWINGS

NOTES:-


- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
- THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
- DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
- WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
- REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED FOR ALL RCC WORK.
- REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
- ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM.
- LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d OF BAR FOR M30 GRADE OF CONCRETE. LAPS SHALL BE STAGGERED. NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
- CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
- ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
- CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
- THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
- PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
- CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920.
- ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
- THE BUILDING HAS BEEN DESIGNED FOR G+3. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.

TENDER DRAWING


CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)
PROJECT	BQ WORKMEN HOUSING
BUILDING	GUEST HOUSE BUILDING (G+3)
DRAWING TITLE	STAIRCASE PLAN & DETAILS
DRG. NO.	MITES/BLD/STR/TD/GH(G+3)/128
NORTH	SCALE NTS
	DATE AUGUST 2025

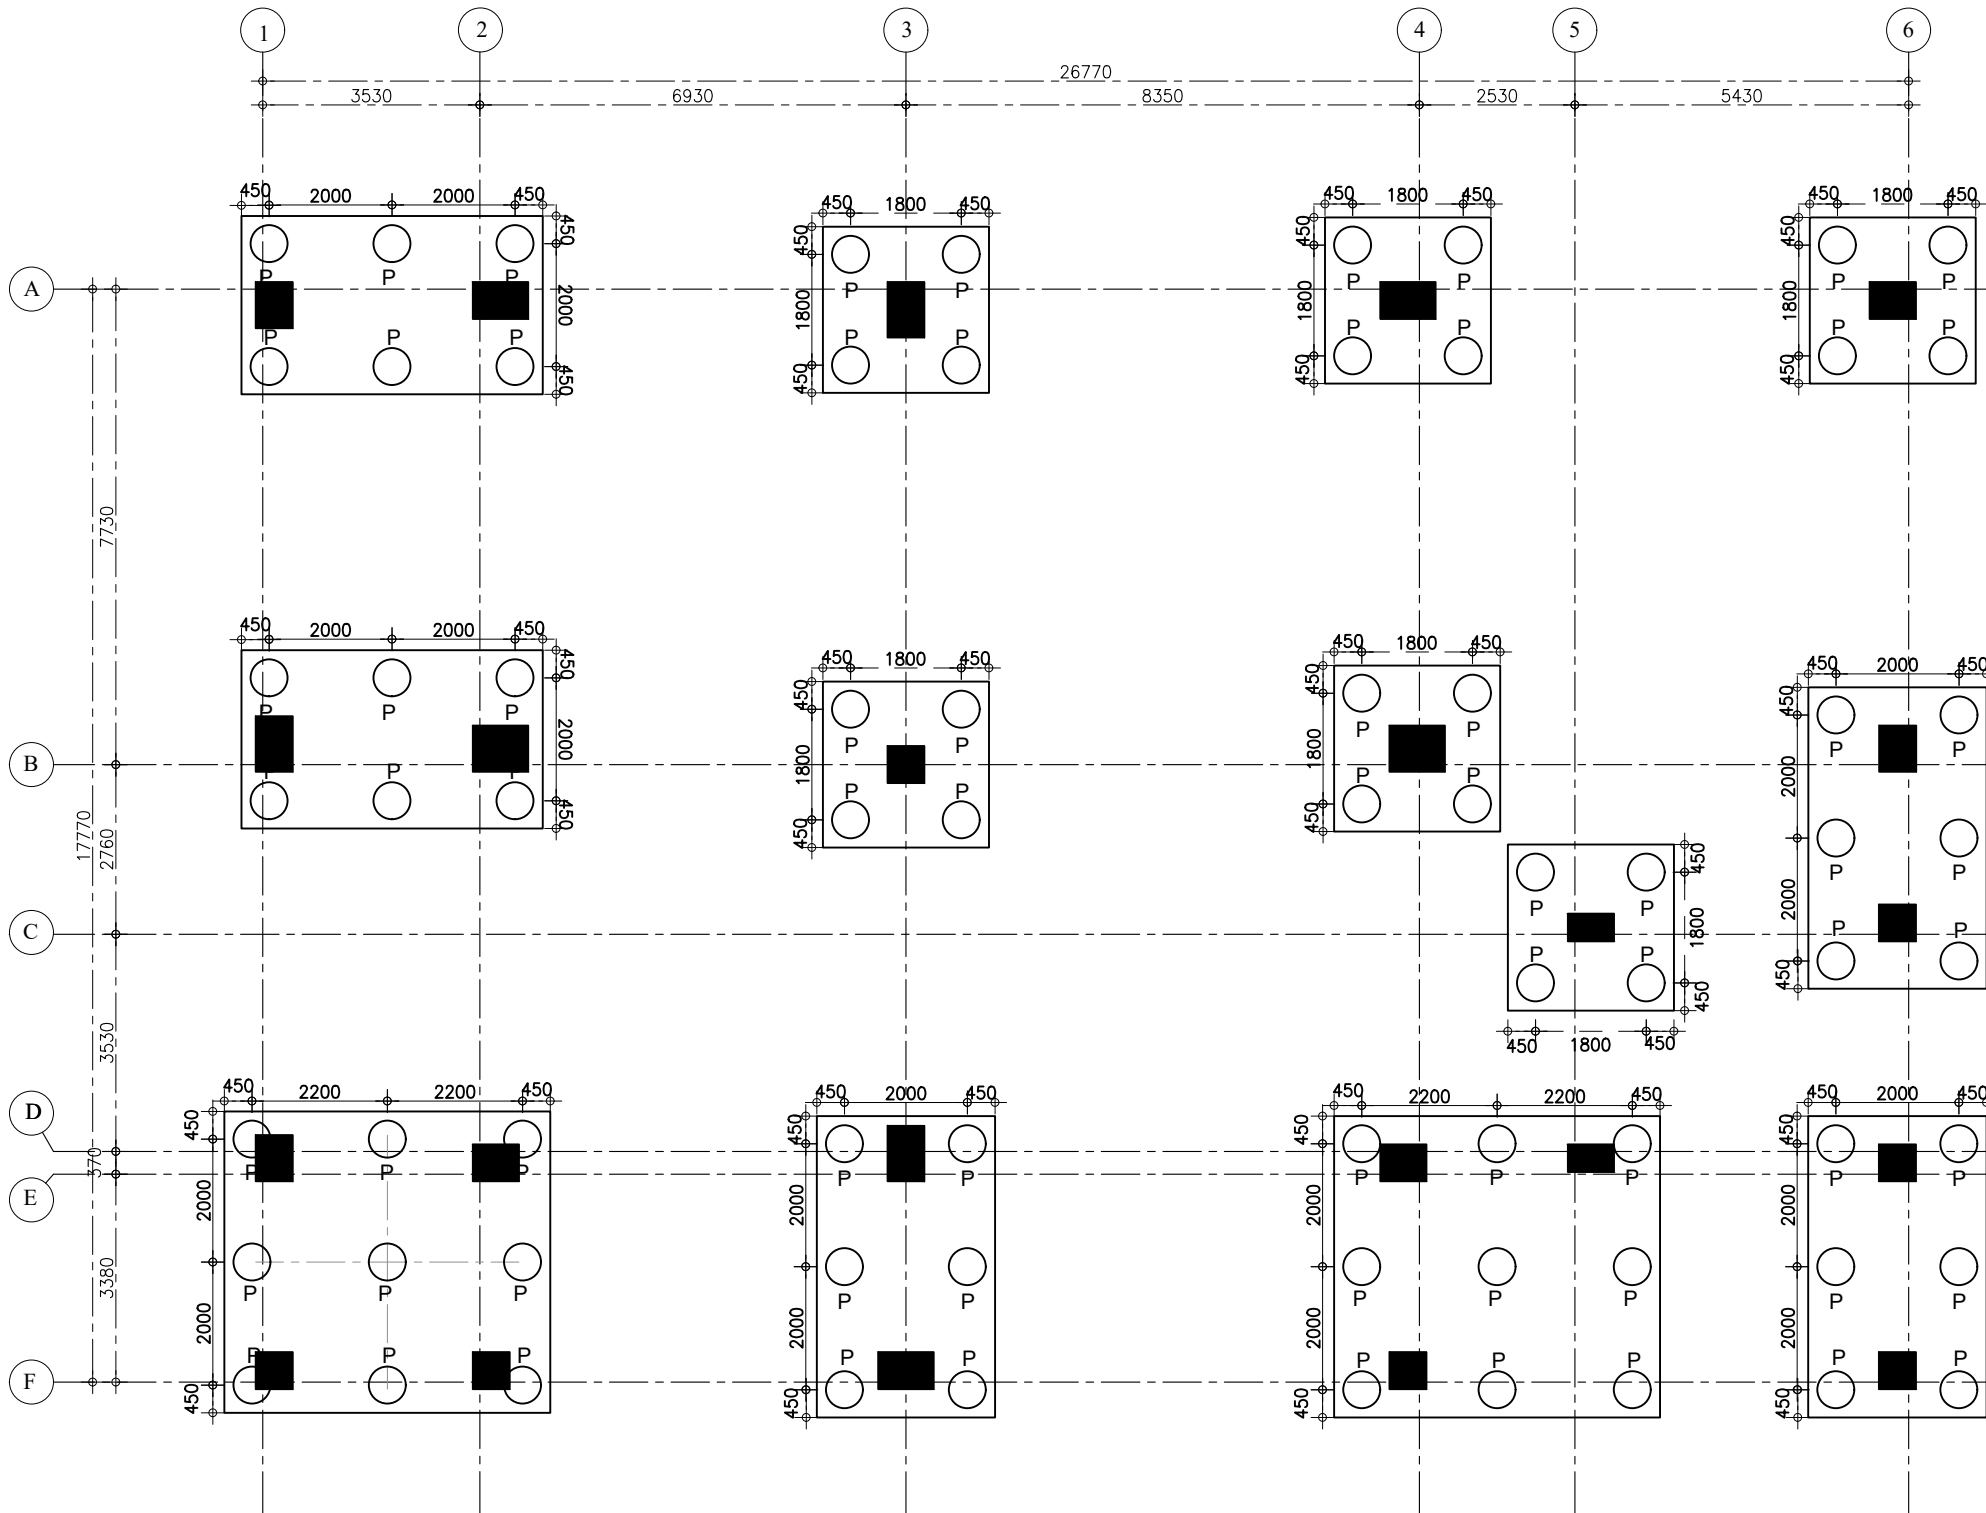

FOUNDATION LAYOUT PLAN

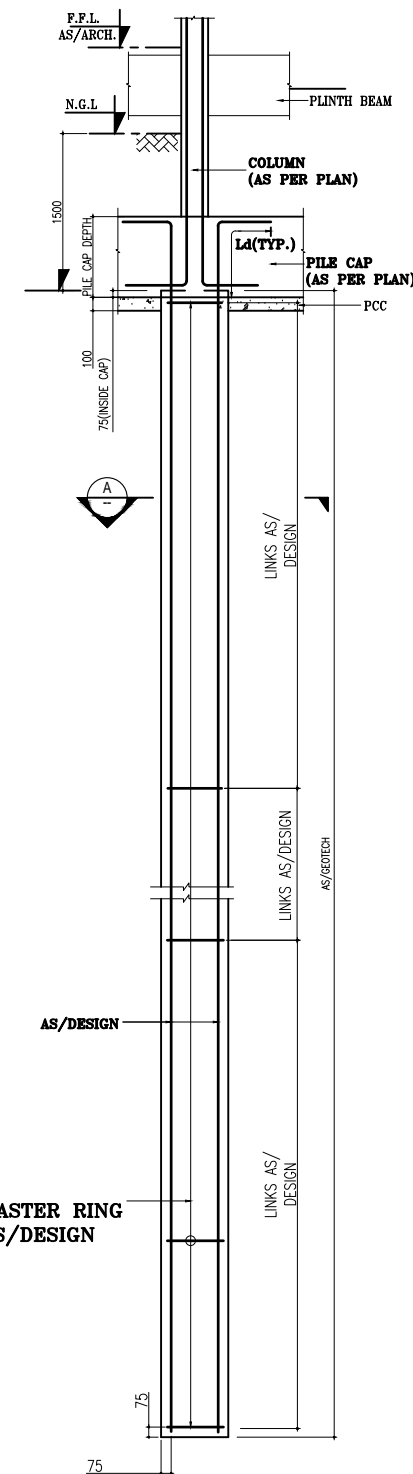

TYPICAL ELEVATION OF PILE (600MM DIA)

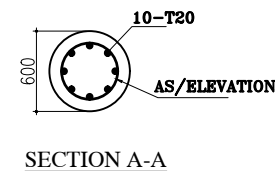


SECTION A-A

- NOTES:-
1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
 2. THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
 3. DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
 4. WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
 5. REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
 6. REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
 7. ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
 8. LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d_{dia} OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
 9. CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
 10. ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
 11. CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
 12. THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
 13. PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
 14. CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S.-13920. ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
 15. THE BUILDING HAS BEEN DESIGNED FOR G+1. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
 16. FOR 600# RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT. SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.
 17. THE STRUCTURAL MEMBER SIZES AND REINFORCEMENT DETAILS SHOWN IN THESE DRAWINGS ARE TENTATIVE AND INTENDED FOR GENERAL GUIDANCE ONLY. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO CARRY OUT THE FINAL DESIGN, DETAILING, AND STABILITY VERIFICATION IN ACCORDANCE WITH APPLICABLE CODES AND ACTUAL SITE CONDITIONS. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ENSURING THE SAFETY, SERVICEABILITY, AND DURABILITY OF THE STRUCTURE DURING CONSTRUCTION AND THROUGHOUT ITS SERVICE LIFE. ANY DISCREPANCY OR DEVIATION SHALL BE REPORTED TO THE ENGINEER FOR REVIEW PRIOR TO EXECUTION.


TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	COMMUNITY CENTER	
DRAWING TITLE	FOUNDATION LAYOUT PLAN	
DRG. NO.	RITES/BLD/STR/TD/CS/129	
NORTH	SCALE	DATE
	NTS	AUGUST 2025

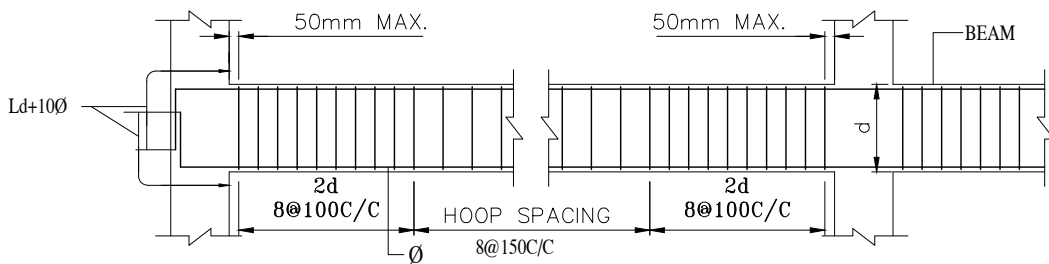


Ld=DEVELOPMENT LENGTH
d= DEPTH OF BEAM
Ø= DIAMETER OF BAR

TYPICAL BEAM SHEAR R/F DETAIL

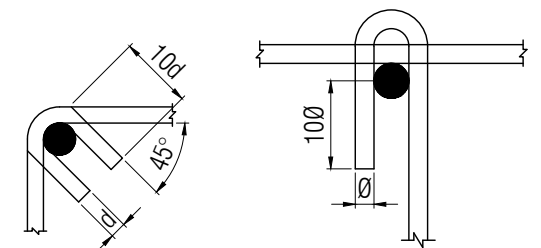


FOR 135° HOOK FOR 180° HOOK

TYPICAL HOOK DETAIL

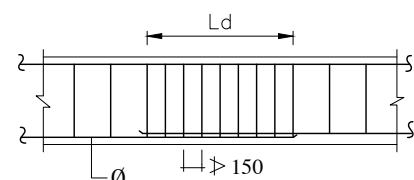


Ld = DEVELOPMENT LENGTH IN TENSION
Ø = BAR DIAMETER

LAP DETAIL IN BEAM

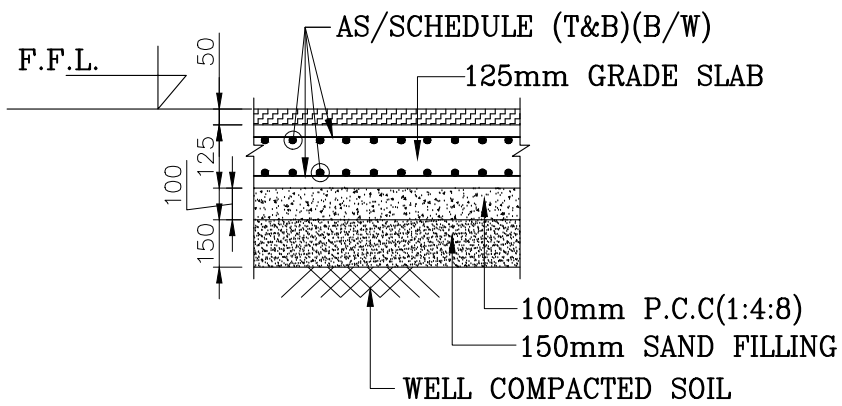

TYPICAL GRADE SLAB DETAIL

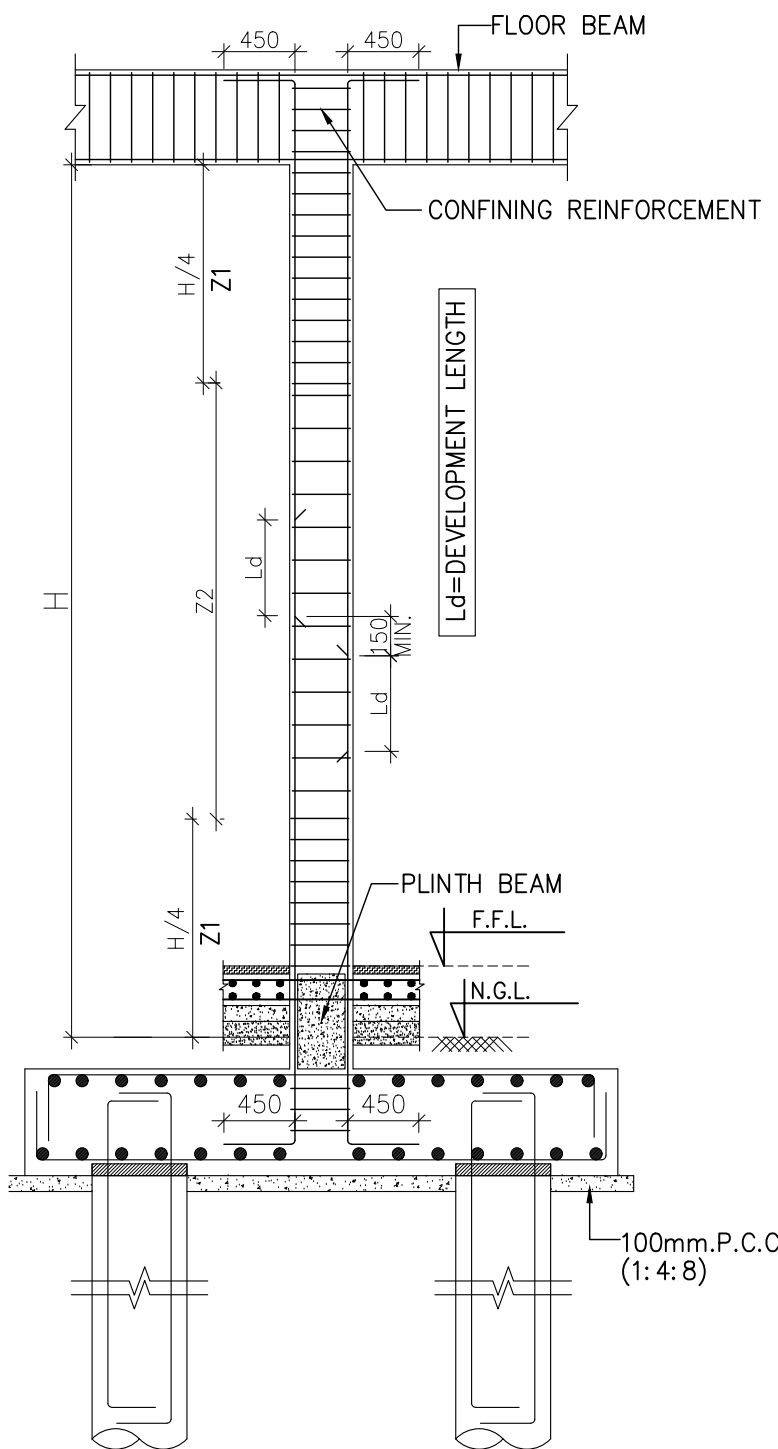


TYPICAL DETAILS FOR LAP & RING SPACING IN COLUMN
DETAIL-A

IMPORTANT NOTE:-
1. SOIL SHOULD BE TESTED AT SITE FOR SBC/PILE LOAD CARRYING CAPACITY BEFORE THE COMMENCEMENT OF THE WORK.


- NOTES:-**
- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
 - THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
 - DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
 - WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
 - REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
 - REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
 - ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
 - LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47Xdia OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
 - CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM
RCC WALL - 30MM.
 - ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
 - CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
 - THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
 - PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
 - CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920.
 - ALL BRICKS IN THE MASONARY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
 - THE BUILDING HAS BEEN DESIGNED FOR G+1. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
 - FOR 600# RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT.
 - SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.

TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	COMMUNITY CENTER	
DRAWING TITLE	TYPICAL DETAILS FOR PILE , COLUMN AND BEAM	
DRG. NO.	RITES/BLD/STR/TD/CS/130	
NORTH	SCALE	DATE
	NTS	AUGUST 2025

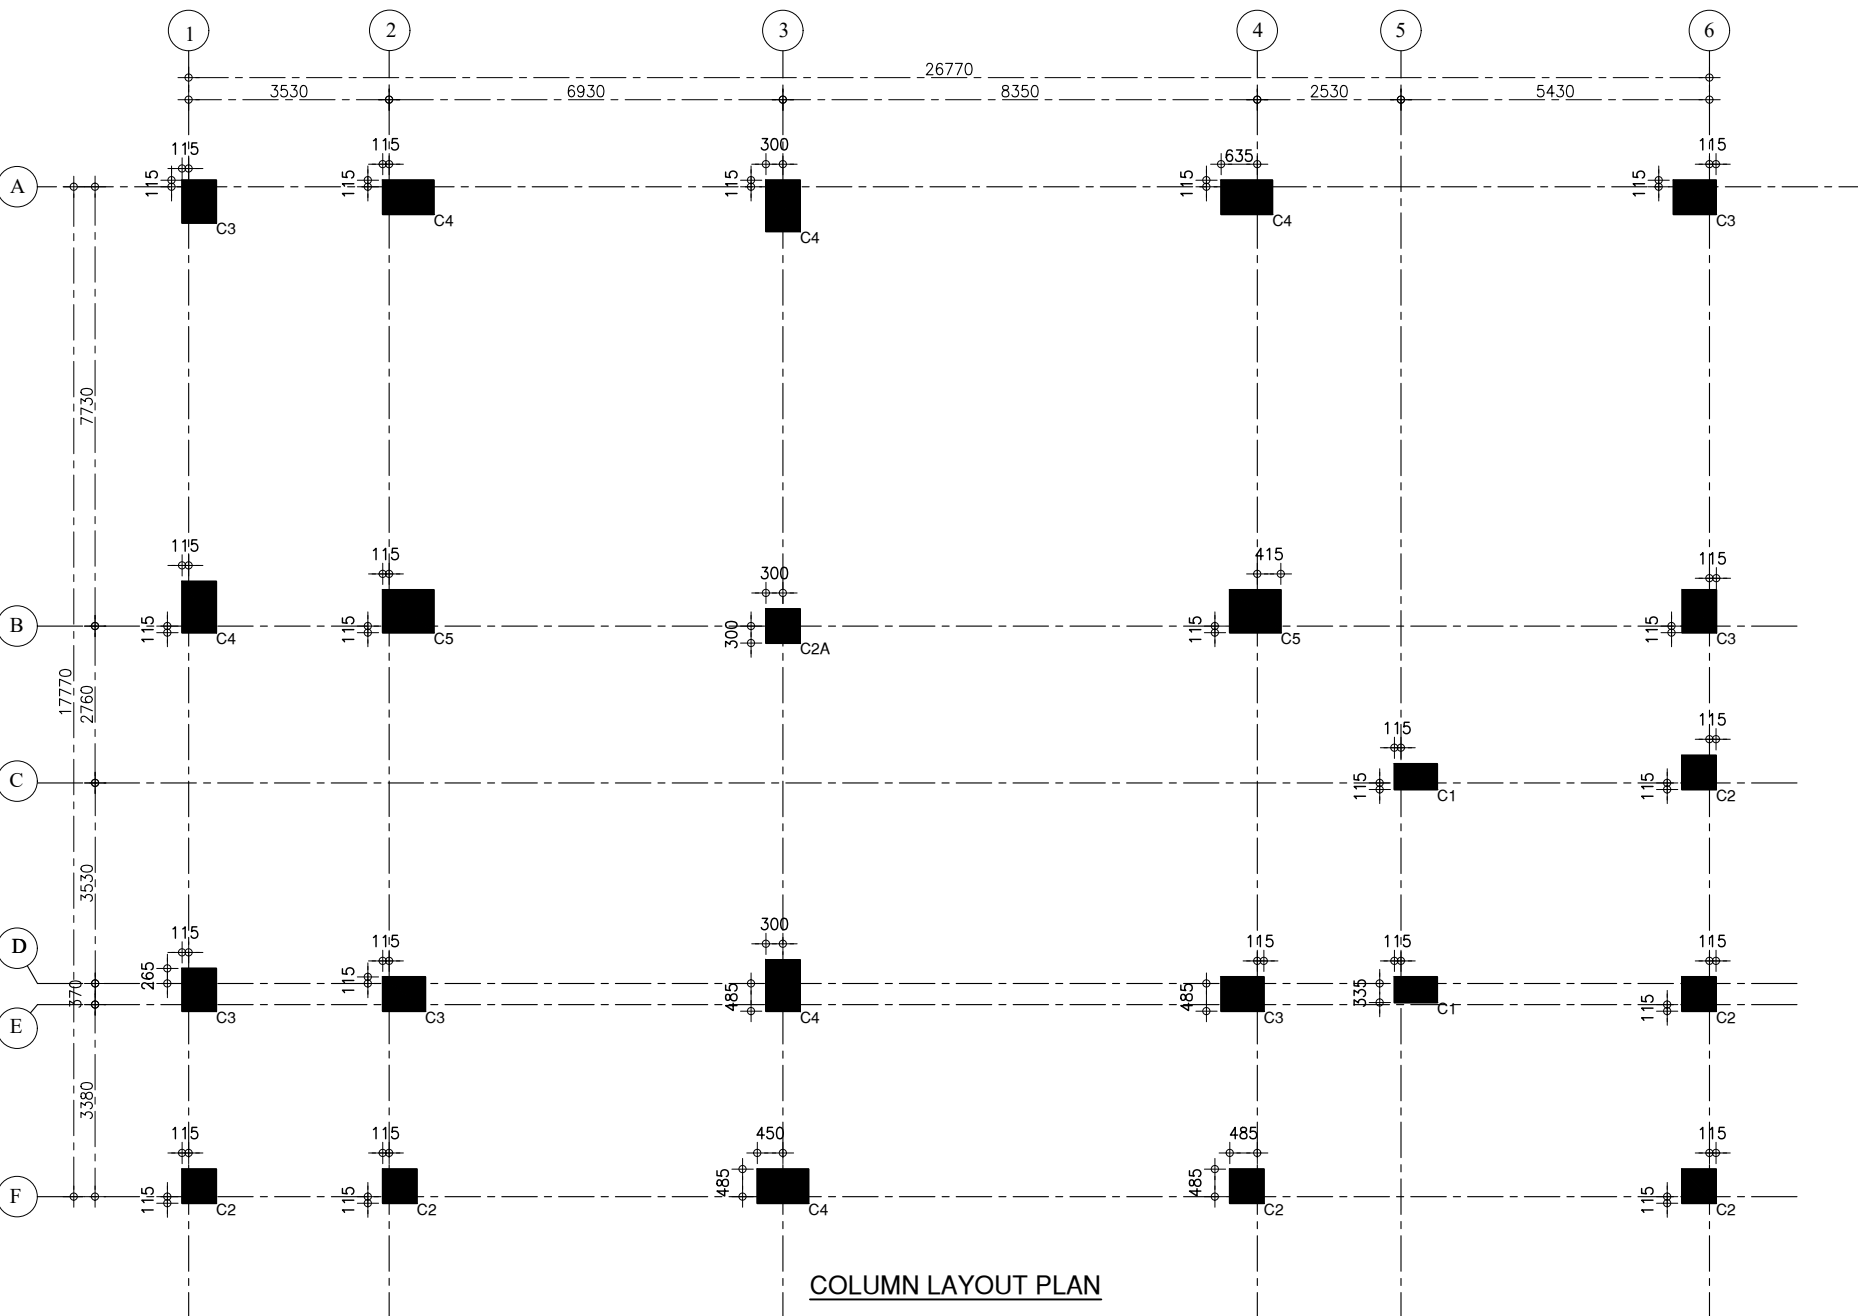

COLUMN LAYOUT PLAN

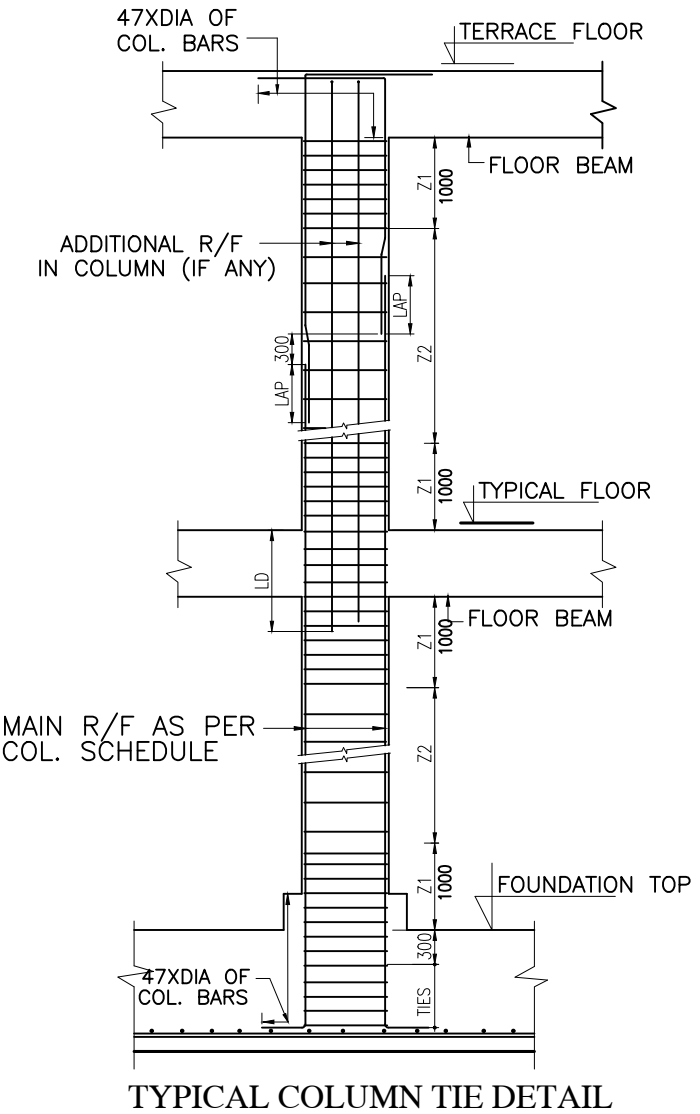

TYPICAL COLUMN TIE DETAIL

- NOTES:-
1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
 2. THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
 3. DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
 4. WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
 5. REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
 6. REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
 7. ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
 8. LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47Xdia OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
 9. CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
 10. ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
 11. CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
 12. THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
 13. PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
 14. CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONARY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
 15. THE BUILDING HAS BEEN DESIGNED FOR G+1. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
 16. FOR 600# RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT. SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.
 17. THE STRUCTURAL MEMBER SIZES AND REINFORCEMENT DETAILS SHOWN IN THESE DRAWINGS ARE TENTATIVE AND INTENDED FOR GENERAL GUIDANCE ONLY. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO CARRY OUT THE FINAL DESIGN, DETAILING, AND STABILITY VERIFICATION IN ACCORDANCE WITH APPLICABLE CODES AND ACTUAL SITE CONDITIONS. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ENSURING THE SAFETY, SERVICEABILITY, AND DURABILITY OF THE STRUCTURE DURING CONSTRUCTION AND THROUGHOUT ITS SERVICE LIFE. ANY DISCREPANCY OR DEVIATION SHALL BE REPORTED TO THE ENGINEER FOR REVIEW PRIOR TO EXECUTION.

TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	COMMUNITY CENTER	
DRAWING TITLE	COLUMN LAYOUT PLAN	
DRG. NO.	MITES/BLD/STR/TD/CS/131	
NORTH	SCALE	DATE
	NTS	AUGUST 2025

TERRACE	TO	TOP												
			Z1 MAIN LINK T10 @ 75	Z1 OTHERS T10 @ 150	Z2 LINKS T10 @ 75	Z1 MAIN LINK T10 @ 75	Z1 OTHERS T10 @ 150	Z2 LINKS T10 @ 75	Z1 MAIN LINK T10 @ 75	Z1 OTHERS T10 @ 150	Z2 LINKS T10 @ 75	Z1 MAIN LINK T10 @ 150	Z1 OTHERS T10 @ 150	Z2 LINKS T10 @ 150
			 12-T32 + 6-T25	 4-T32 + 12-T25	 20-T25	 18-T32 + 4-T25	 20-T32 + 6-T25							
FIRST FLOOR	TO	TERRACE												
			Z1 MAIN LINK T10 @ 75	Z1 OTHERS T10 @ 150	Z2 LINKS T10 @ 75	Z1 MAIN LINK T10 @ 75	Z1 OTHERS T10 @ 150	Z2 LINKS T10 @ 75	Z1 MAIN LINK T10 @ 75	Z1 OTHERS T10 @ 150	Z2 LINKS T10 @ 75	Z1 MAIN LINK T10 @ 150	Z1 OTHERS T10 @ 150	Z2 LINKS T10 @ 150
			 12-T32 + 6-T25	 4-T32 + 12-T25	 20-T25	 18-T32 + 4-T25	 20-T32 + 6-T25							
PLINTH	TO	FIRST FLOOR												
			Z1 MAIN LINK T10 @ 75	Z1 OTHERS T10 @ 150	Z2 LINKS T10 @ 75	Z1 MAIN LINK T10 @ 75	Z1 OTHERS T10 @ 150	Z2 LINKS T10 @ 75	Z1 MAIN LINK T10 @ 75	Z1 OTHERS T10 @ 150	Z2 LINKS T10 @ 75	Z1 MAIN LINK T10 @ 150	Z1 OTHERS T10 @ 150	Z2 LINKS T10 @ 150
			 12-T32 + 6-T25	 4-T32 + 12-T25	 20-T25	 18-T32 + 4-T25	 20-T32 + 6-T25							
FOUNDATION	TO	PLINTH												
			Z1 MAIN LINK T10 @ 75	Z1 OTHERS T10 @ 150	Z2 LINKS T10 @ 75	Z1 MAIN LINK T10 @ 75	Z1 OTHERS T10 @ 150	Z2 LINKS T10 @ 75	Z1 MAIN LINK T10 @ 75	Z1 OTHERS T10 @ 150	Z2 LINKS T10 @ 75	Z1 MAIN LINK T10 @ 150	Z1 OTHERS T10 @ 150	Z2 LINKS T10 @ 75
			 12-T32 + 6-T25	 4-T32 + 12-T25	 20-T25	 18-T32 + 4-T25	 20-T32 + 6-T25	 4-T32 + 12-T25						
COLUMN MARKED			C1	C2	C3	C4	C7	C2A						

- NOTES:-**
- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
 - THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
 - DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
 - WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
 - REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
 - REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
 - ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
 - LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47Xdia OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
 - CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM
RCC WALL - 30MM.
 - ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
 - CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
 - THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
 - PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
 - CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONARY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
 - THE BUILDING HAS BEEN DESIGNED FOR G+1. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.

TENDER DRAWING

CLIENT

OIL INDIA LIMITED
(A Govt. of India Enterprise)

CONSULTANT

RITES
THE INFRASTRUCTURE PEOPLE
(A Govt. of India Enterprise)

PROJECT

BQ WORKMEN HOUSING

BUILDING

COMMUNITY CENTER

DRAWING TITLE

COLUMN REINFORCEMENT DETAILS

DRG. NO.

RITES/BLD/STR/TD/CS/132


NORTH

SCALE



NTS

DATE

AUGUST 2025

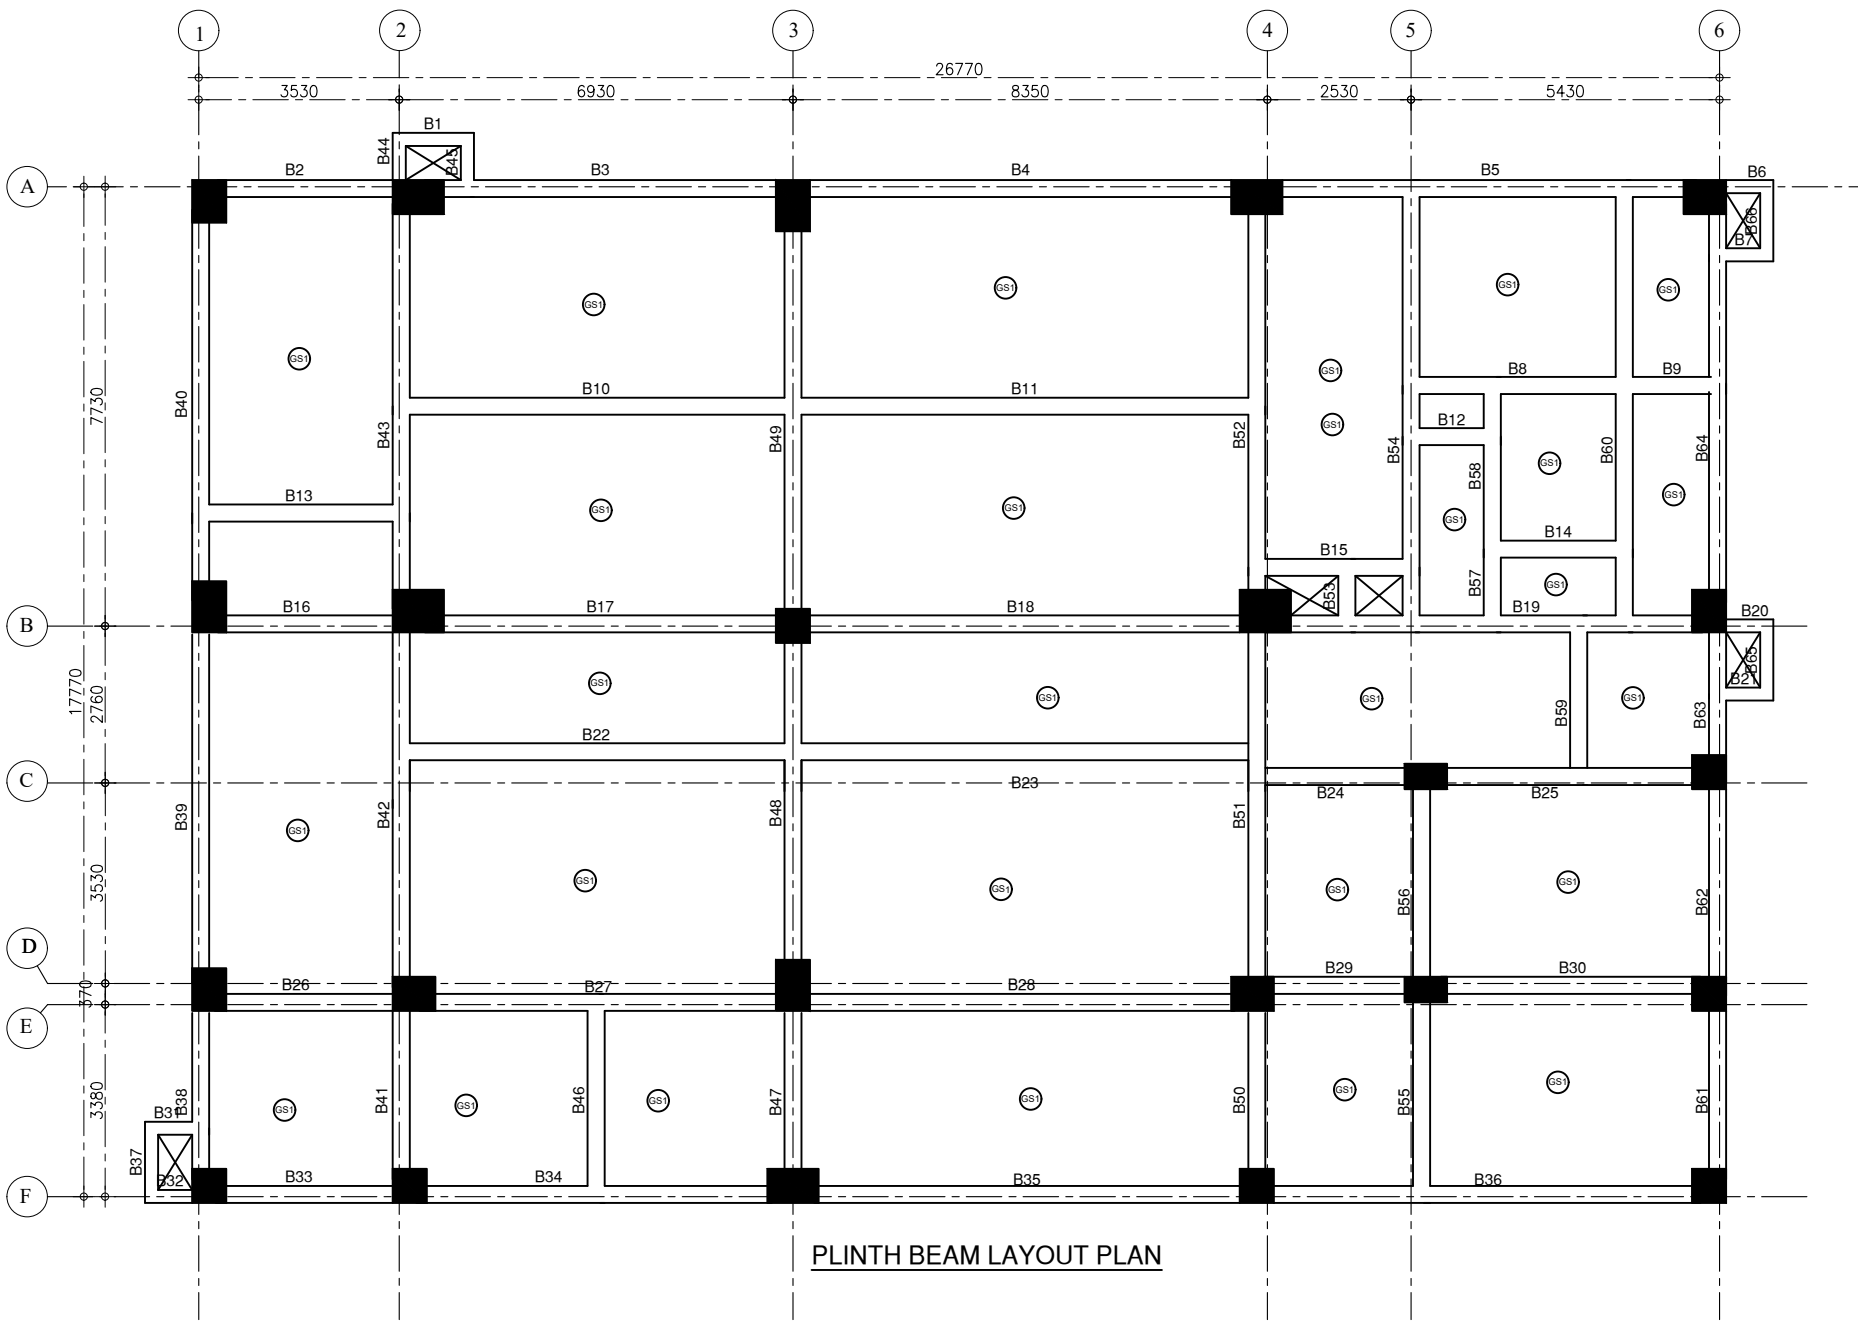


PLINTH BEAM LAYOUT PLAN

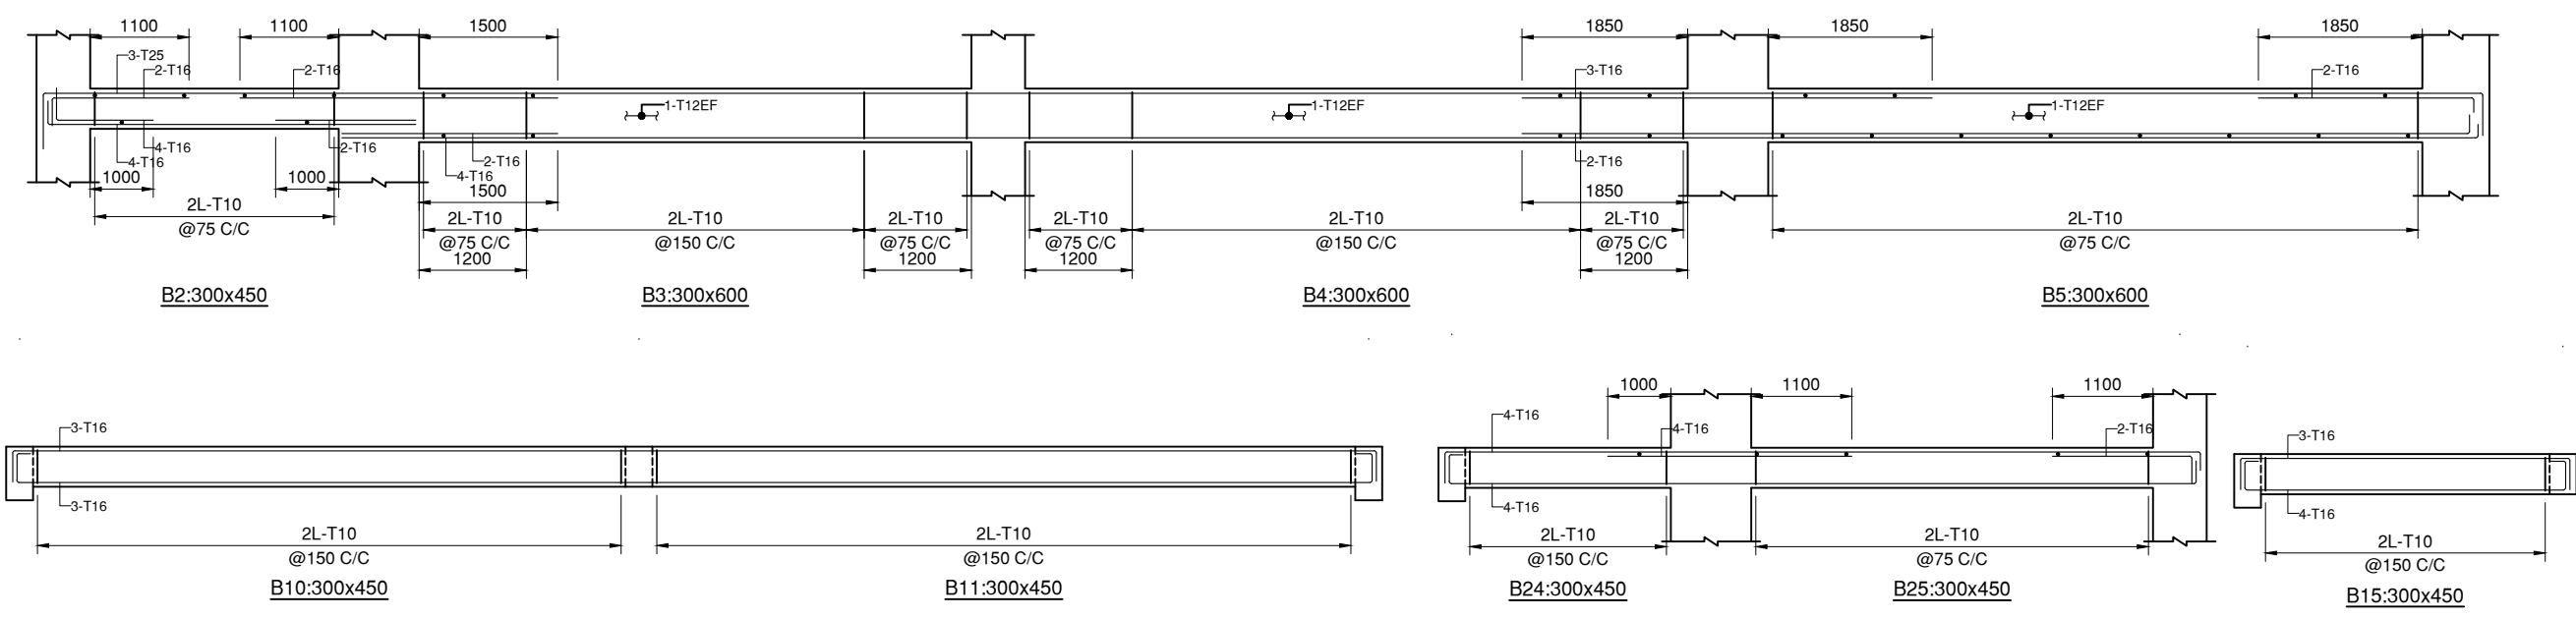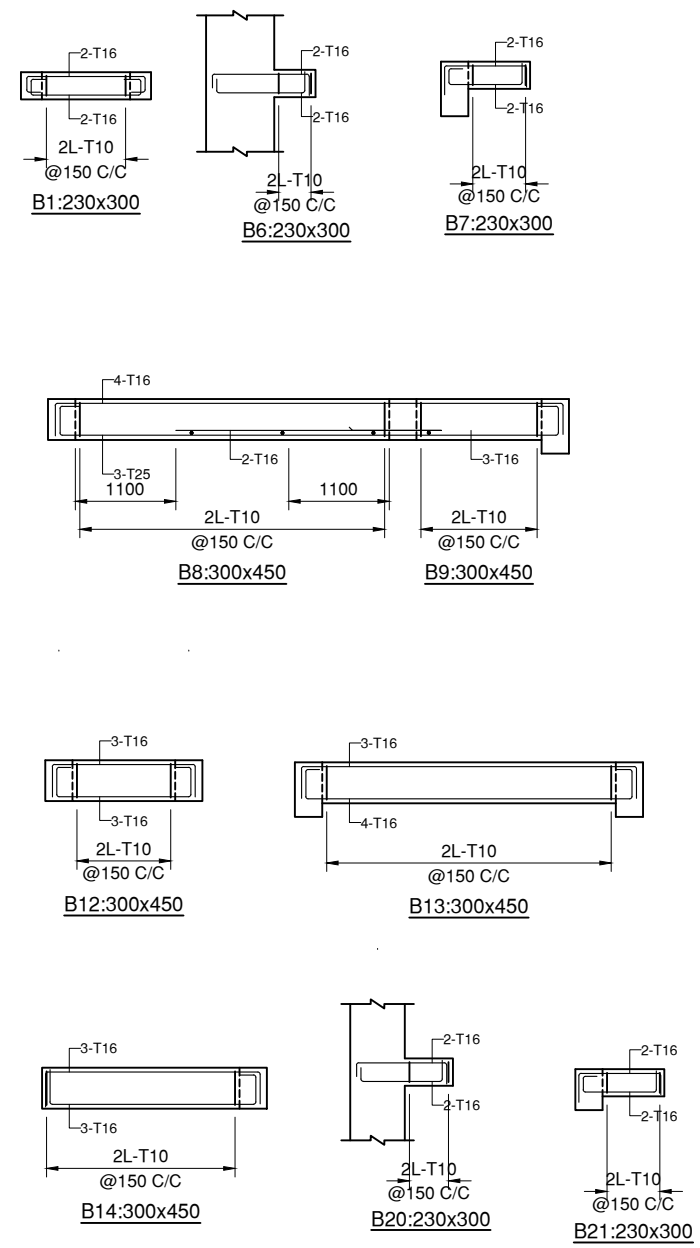

- NOTES:-**
- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
 - THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
 - DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
 - WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
 - REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
 - REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
 - ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
 - LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d_{dia} OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
 - CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS - 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
 - ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
 - CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
 - THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
 - PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
 - CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
 - THE BUILDING HAS BEEN DESIGNED FOR G+1. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.

TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	COMMUNITY CENTER	
DRAWING TITLE	PLINTH BEAM LAYOUT AND REINFORCEMENT DETAILS	
DRG. NO.	RITES/BLD/STR/TD/CS/133	
NORTH	SCALE	DATE
	NTS	AUGUST 2025

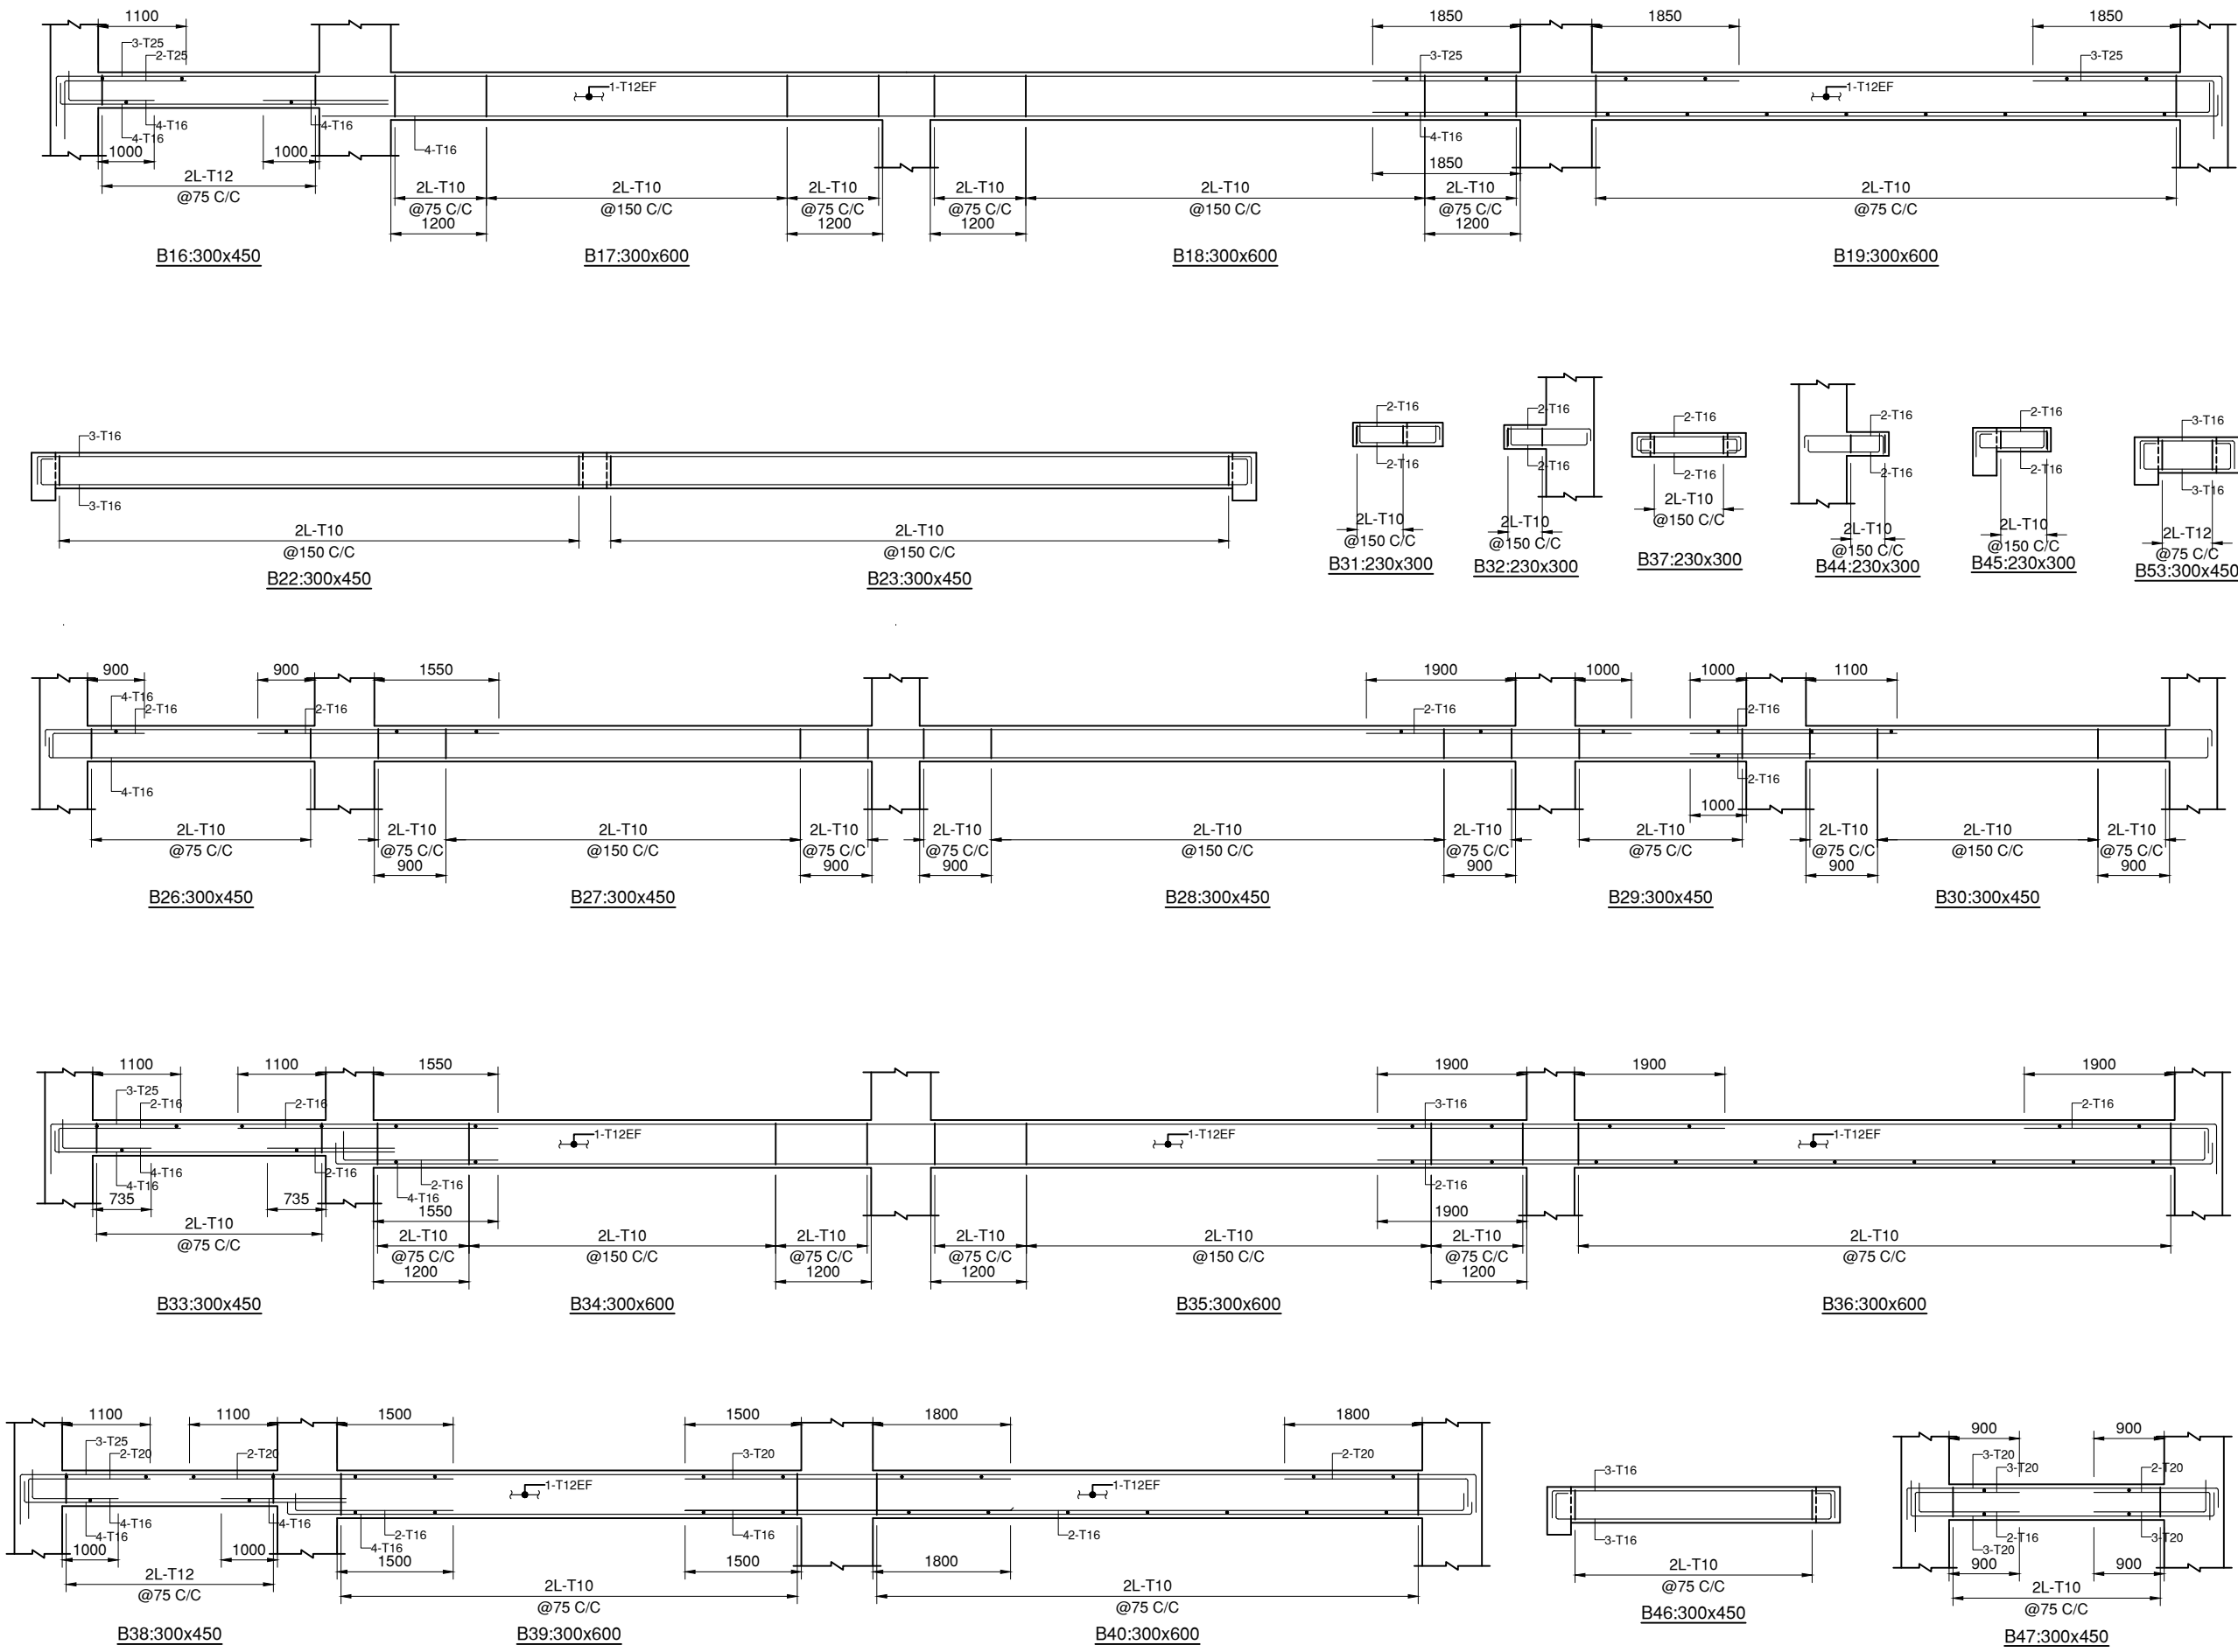

NOTES:-

1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.

2. THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.

3. DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.

4. WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.

5. REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.

6. REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.

7. ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM

8. LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d_{dia} OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.

9. CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.

10. ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.

11. CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.

12. THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.

13. PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.

14. CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13820. ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.

15. THE BUILDING HAS BEEN DESIGNED FOR G+1. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.

TENDER DRAWING

CLIENT

OIL INDIA LIMITED
(A Govt. of India Enterprise)

CONSULTANT

THE INFRASTRUCTURE PEOPLE
(A Govt. of India Enterprise)

PROJECT

BQ WORKMEN HOUSING

BUILDING

COMMUNITY CENTER

DRAWING TITLE

PLINTH BEAM REINFORCEMENT DETAILS

DRG. NO.

RITES/BLD/STR/TD/CS/134

NORTH

SCALE

NTS

DATE

AUGUST 2025