

GRADE SLABS SCHEDULE DETAILS


S.NO	SLAB MARK	SLAB THICK	REINFORCEMENT			
			BOTTOM THRU BARS		TOP BARS	
			ALONG SHORT SPAN	ALONG LONG SPAN	ALONG SHORT SPAN	ALONG LONG SPAN
1.	GS1	150	8@150C/C	8@150C/C	8@150C/C	8@150C/C

NOTES:-



- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
- THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
- DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
- WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
- REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
- REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
- ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
- LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d_{dia} OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
- CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
- ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
- CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
- THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
- PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
- CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
- THE BUILDING HAS BEEN DESIGNED FOR G+1. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.

TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	COMMUNITY CENTER	
DRAWING TITLE	PLINTH BEAM REINFORCEMENT DETAILS	
DRG. NO.	MITES/BLD/STR/TD/CS/135	
NORTH	SCALE	DATE
	NTS	AUGUST 2025

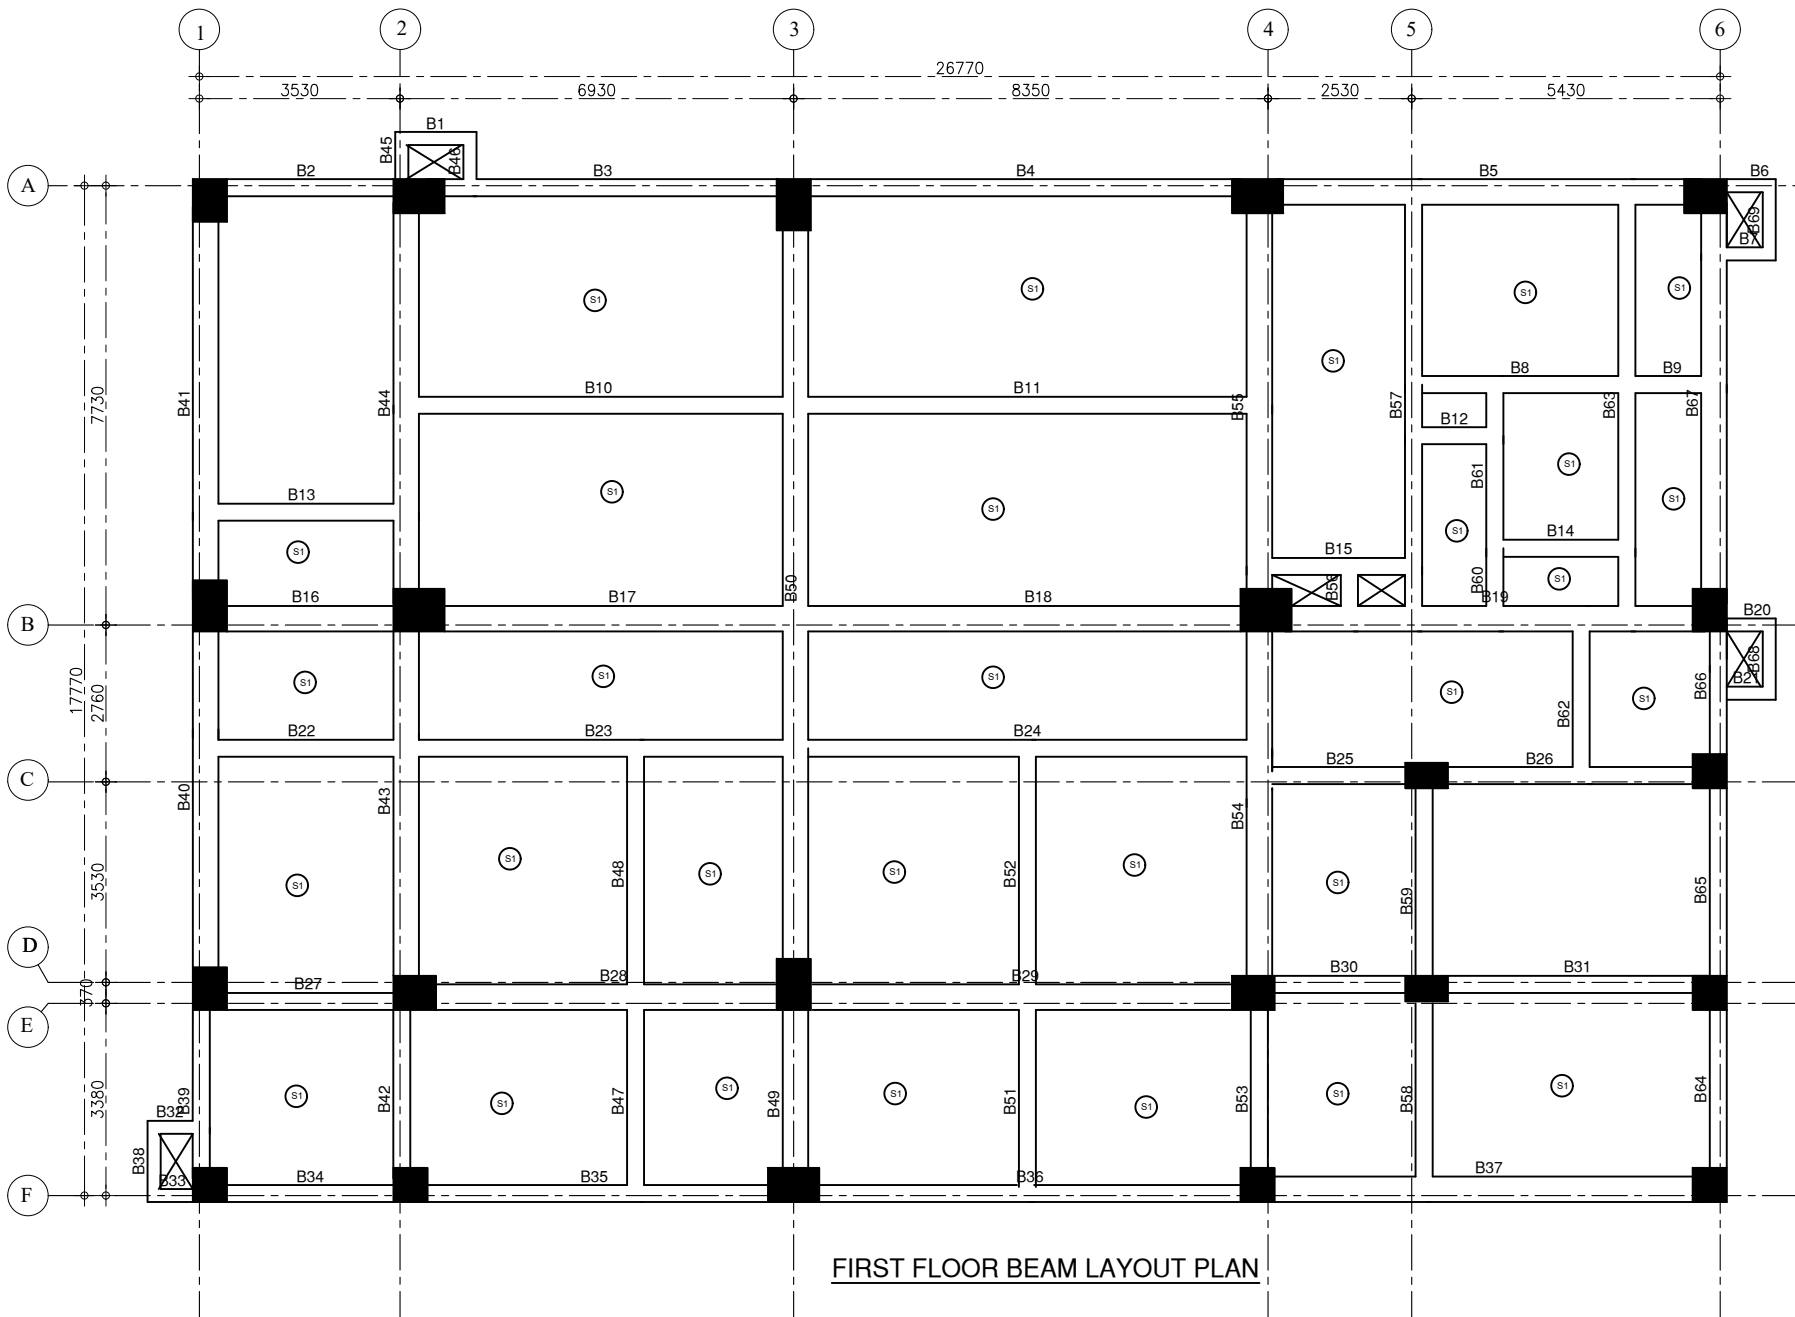


FIRST FLOOR BEAM LAYOUT PLAN

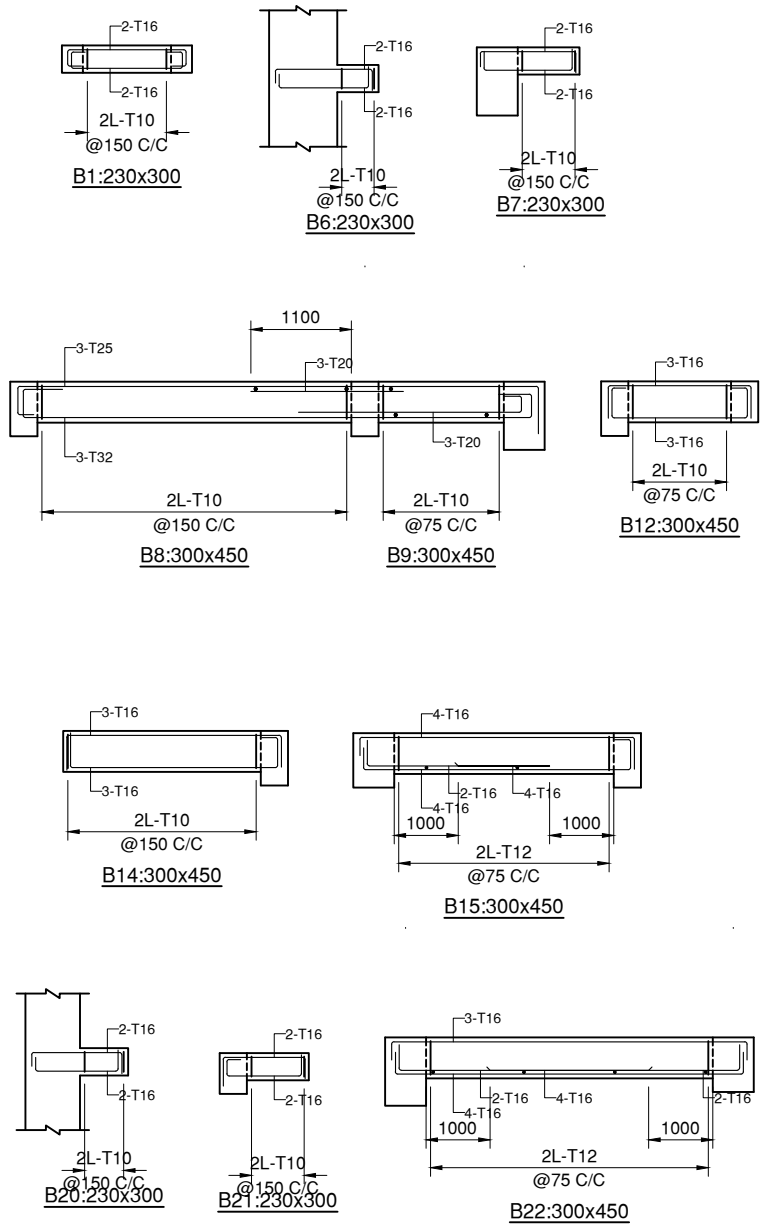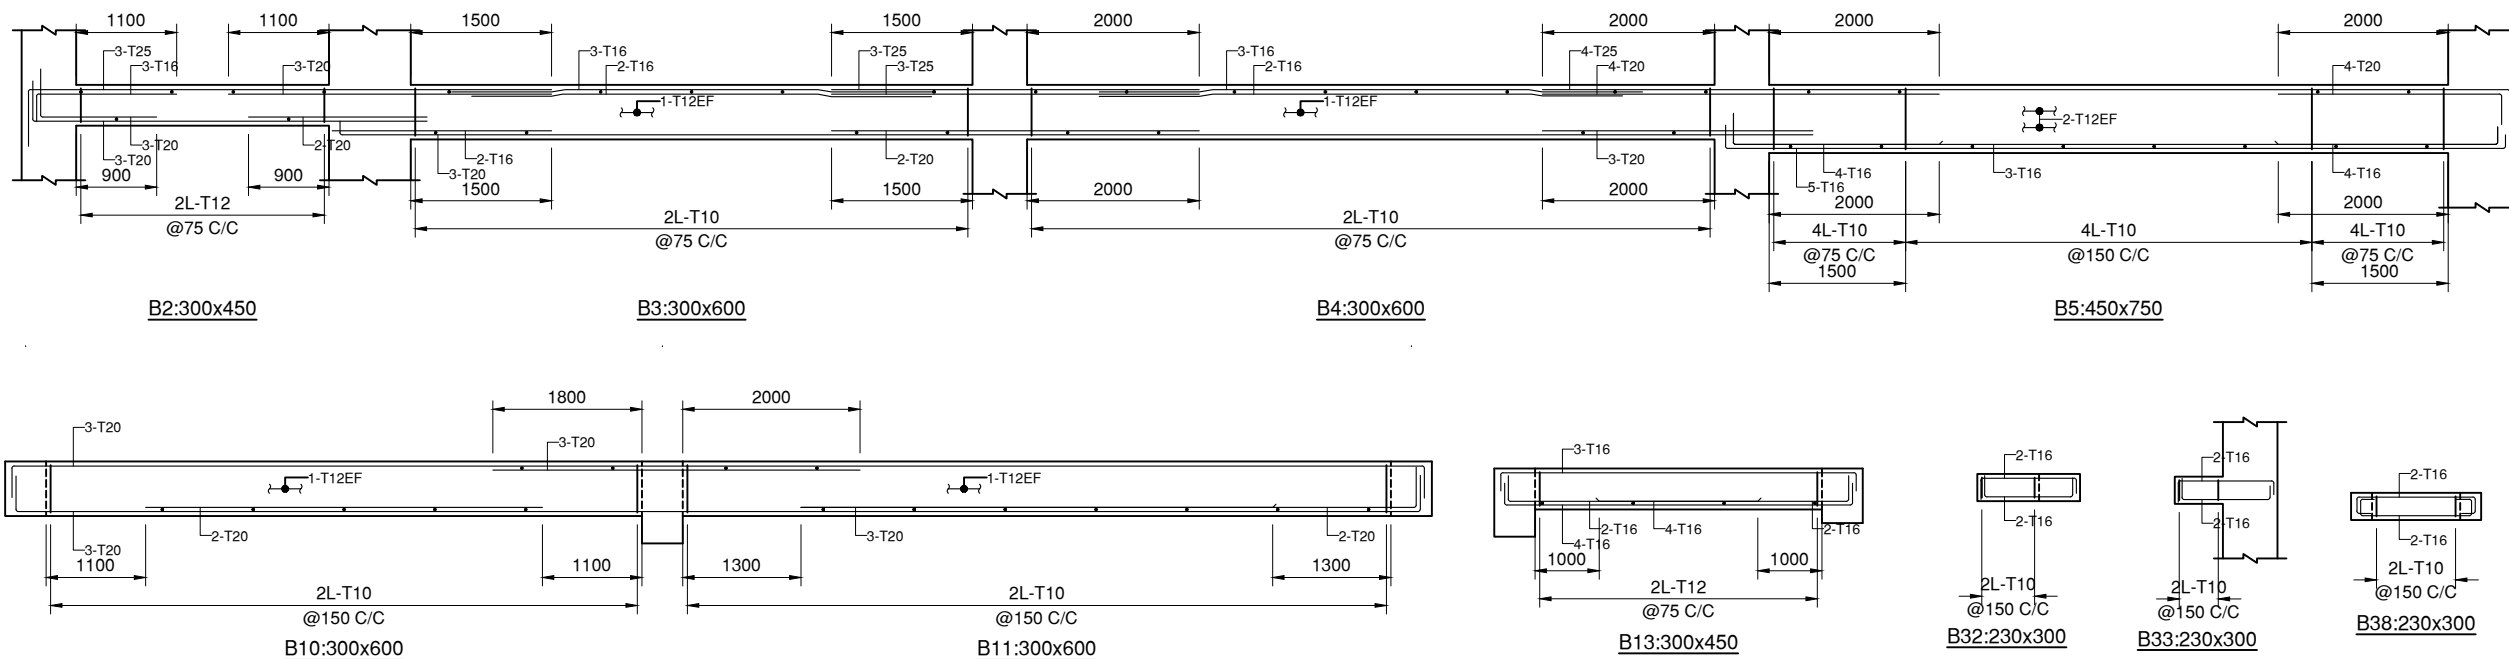

NOTES:-		
1.	ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.	
2.	THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.	
3.	DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.	
4.	WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.	
5.	REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.	
6.	REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.	
7.	ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM	
8.	LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d_{dia} OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.	
9.	CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.	
10.	ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.	
11.	CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.	
12.	THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.	
13.	PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.	
14.	CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13820. ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.	
15.	THE BUILDING HAS BEEN DESIGNED FOR G+1. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.	
TENDER DRAWING		
CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	COMMUNITY CENTER	
DRAWING TITLE	FIRST FLOOR BEAM LAYOUT AND REINFORCEMENT DETAILS	
DRG. NO.	MITES/BLD/STR/TD/CS/136	
NORTH	SCALE	DATE
	NTS	AUGUST 2025

AUGUST 2025

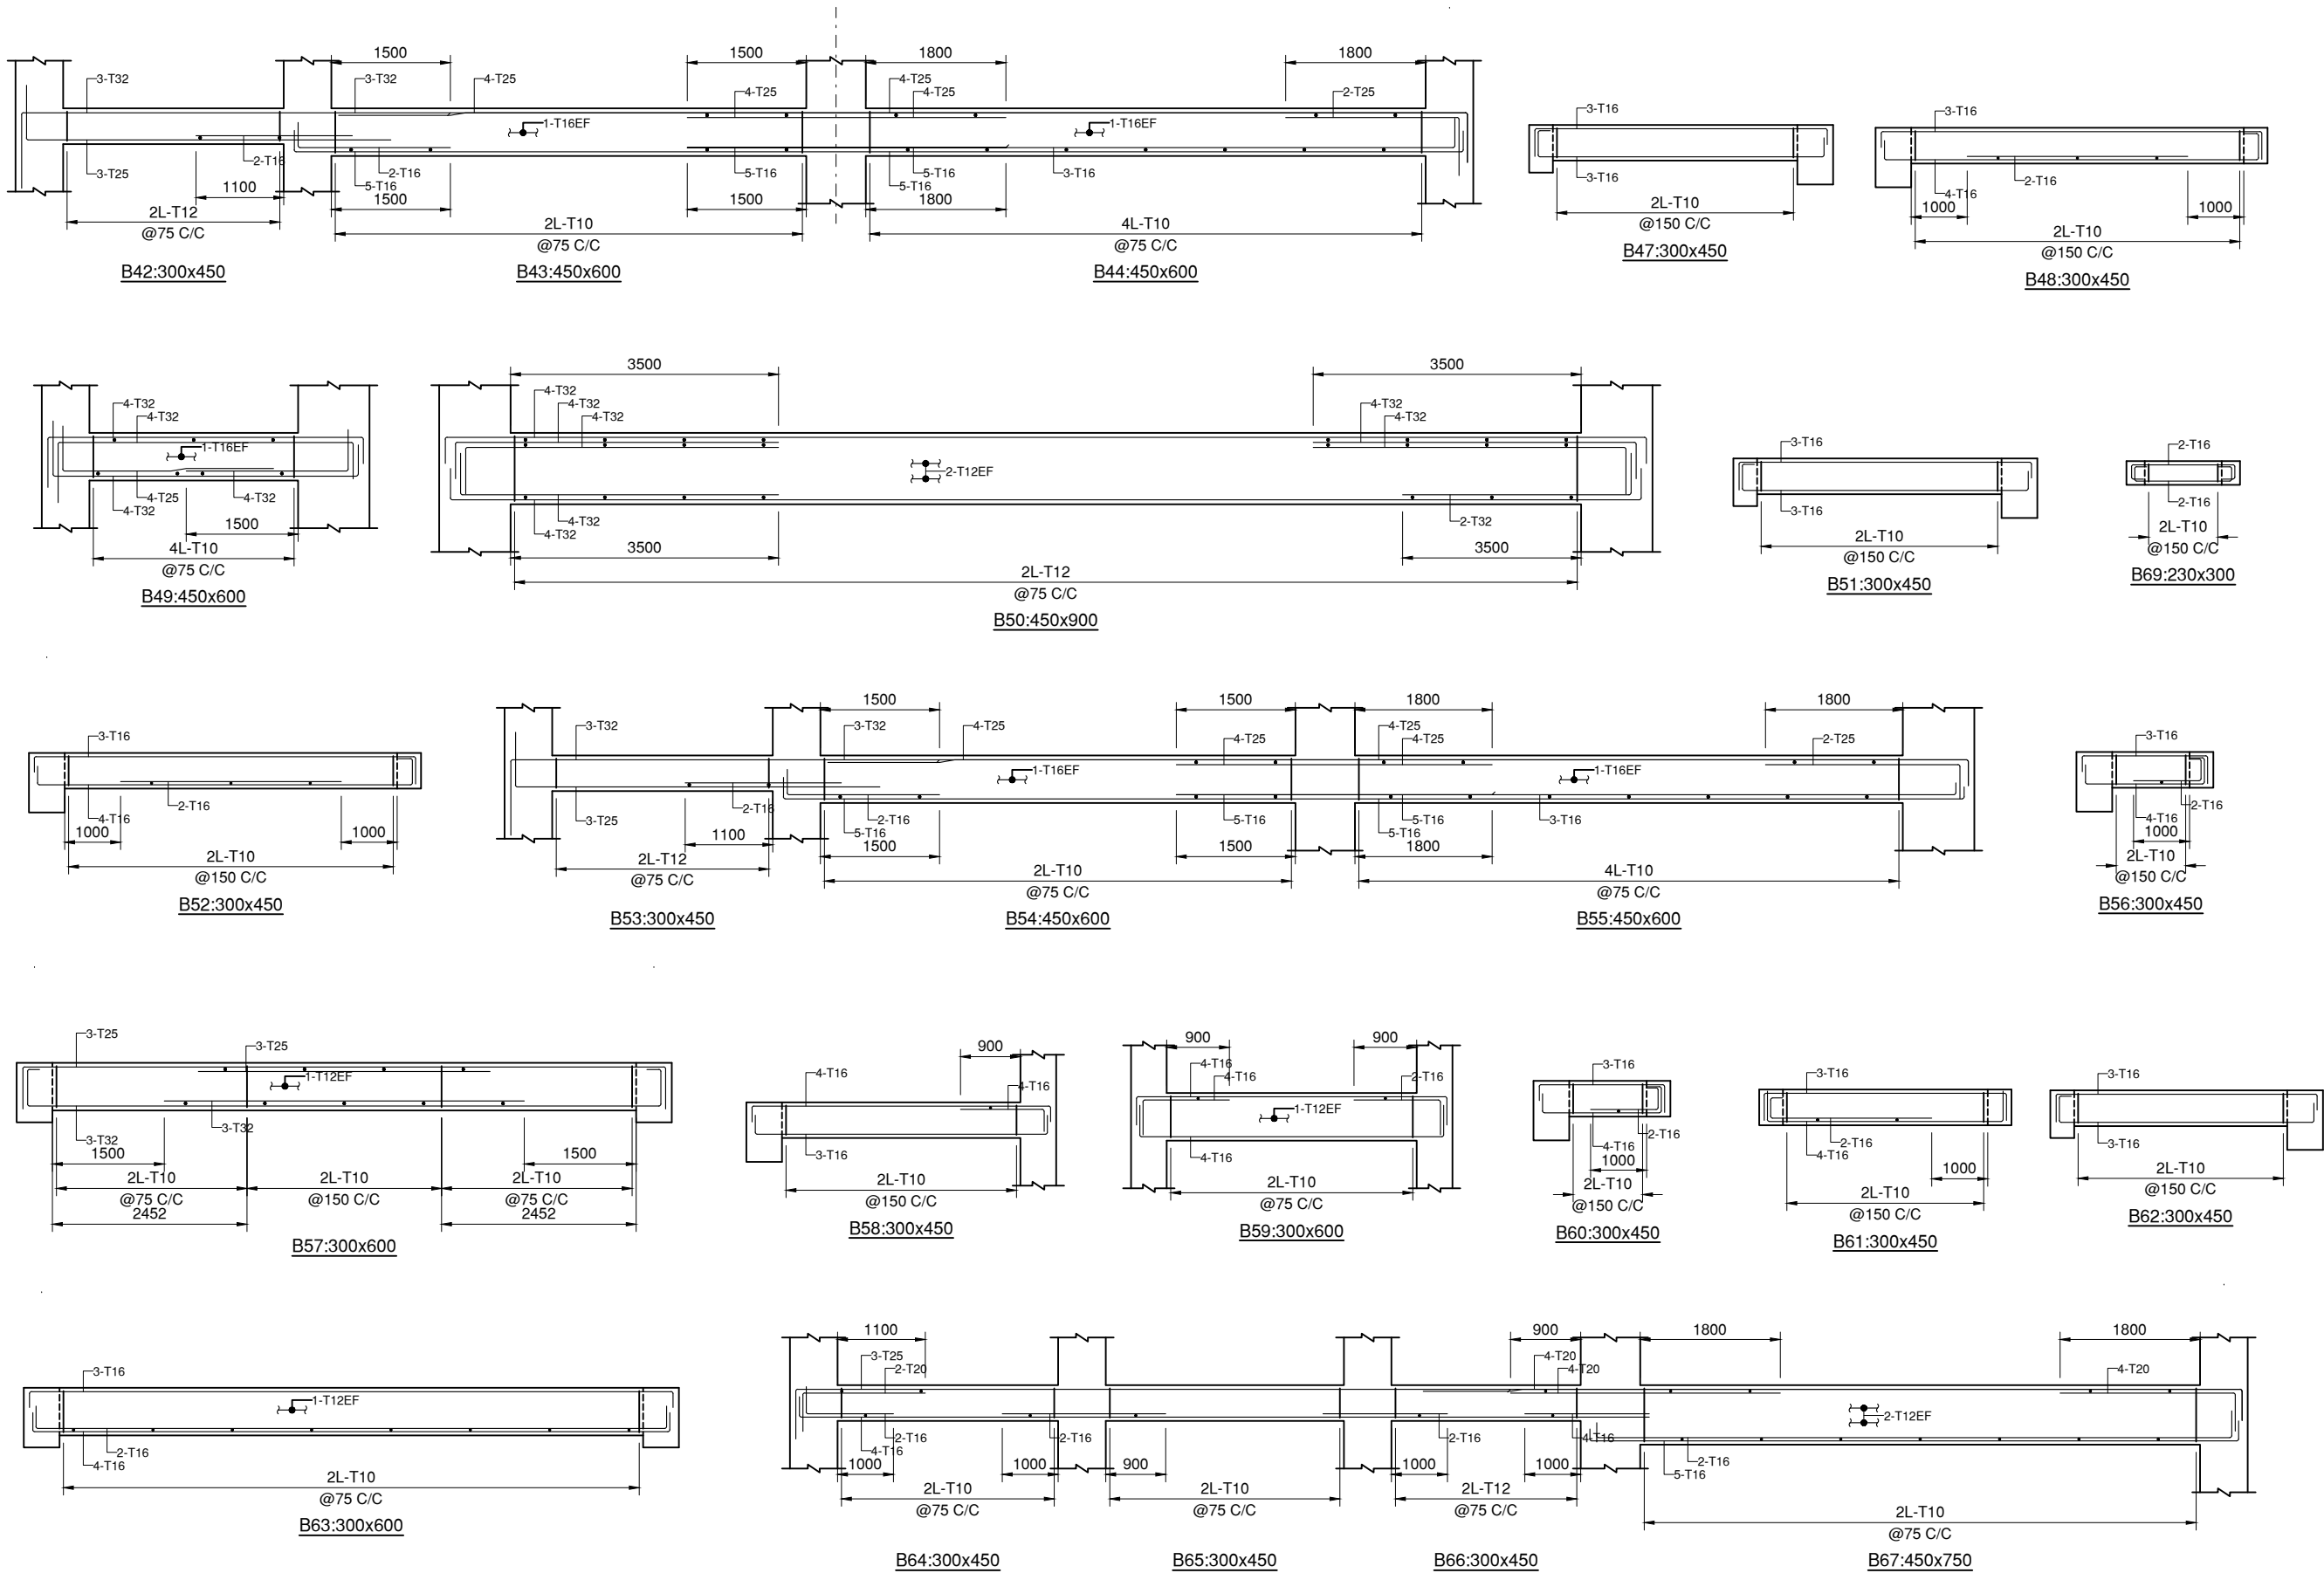

SLABS SCHEDULE DETAILS




S.NO	SLAB MARK	SLAB THICK	REINFORCEMENT			
			BOTTOM THRU BARS		TOP BARS	
			ALONG SHORT SPAN	ALONG LONG SPAN	ALONG SHORT SPAN	ALONG LONG SPAN
1.	S1	150	8@100C/C	8@100C/C	8@150C/C	8@150C/C

NOTES:-

- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
- THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
- DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
- WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
- REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
- REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
- ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
- LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d_{dia} OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
- CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
- ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
- CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
- THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
- PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
- CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
- THE BUILDING HAS BEEN DESIGNED FOR G+1. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.

TENDER DRAWING


CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	COMMUNITY CENTER	
DRAWING TITLE	FIRST FLOOR BEAM REINFORCEMENT DETAILS	
DRG. NO.	MITES/BLD/STR/TD/CS/138	
NORTH	SCALE	DATE
	NTS	AUGUST 2025

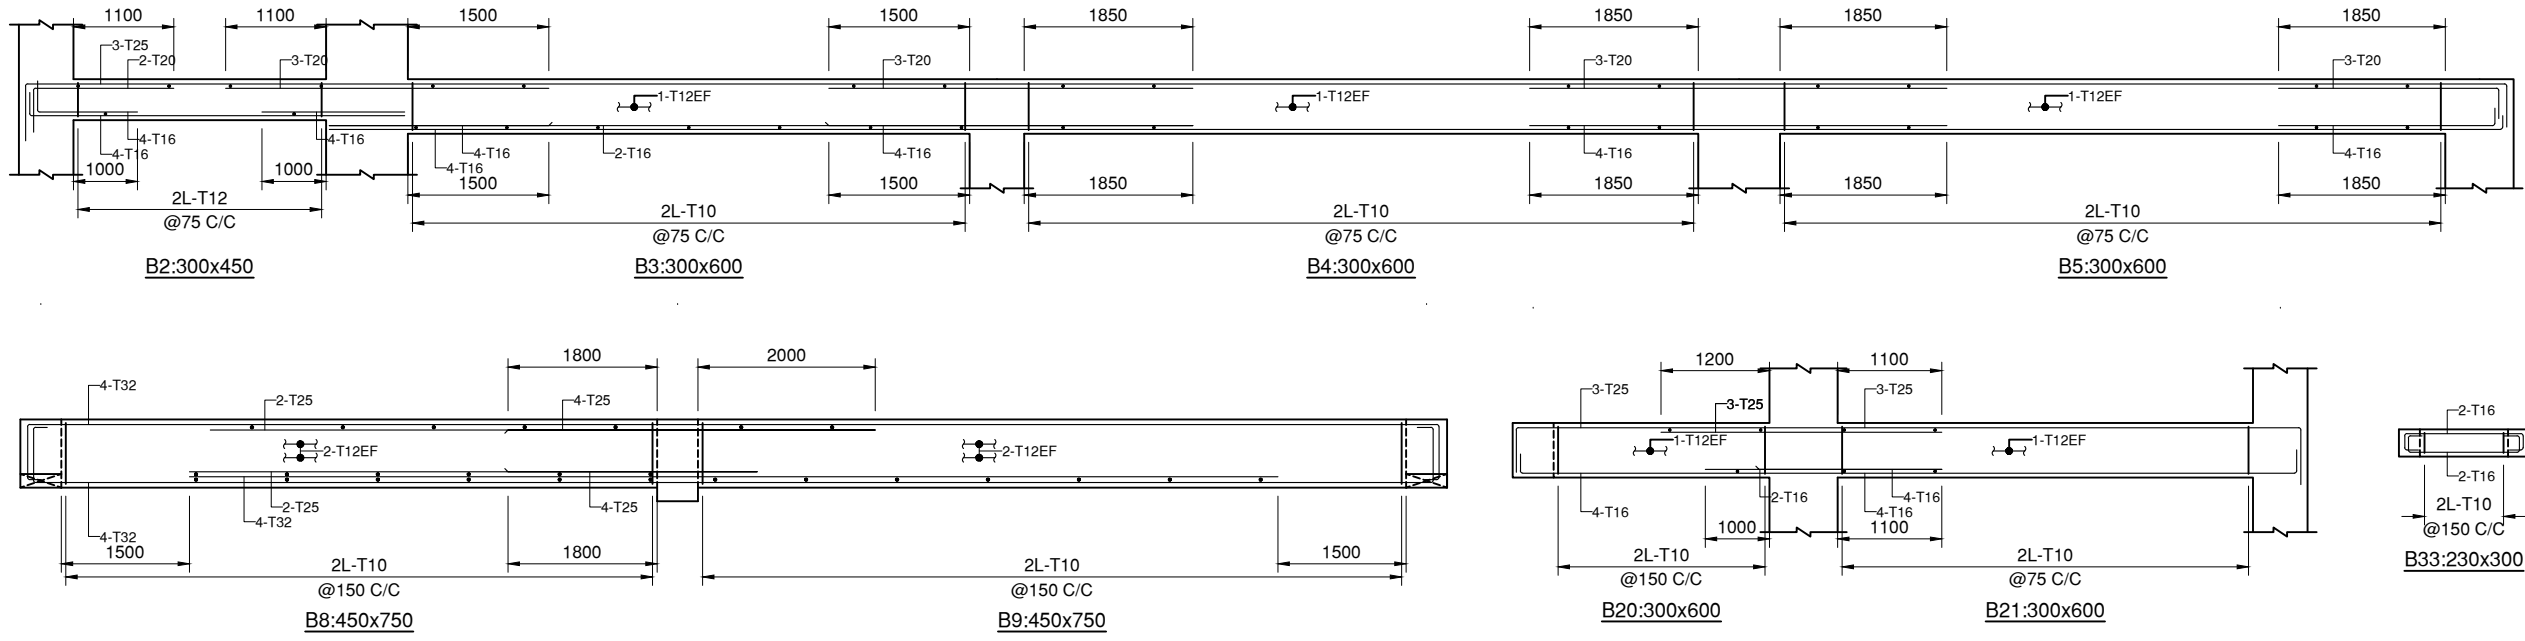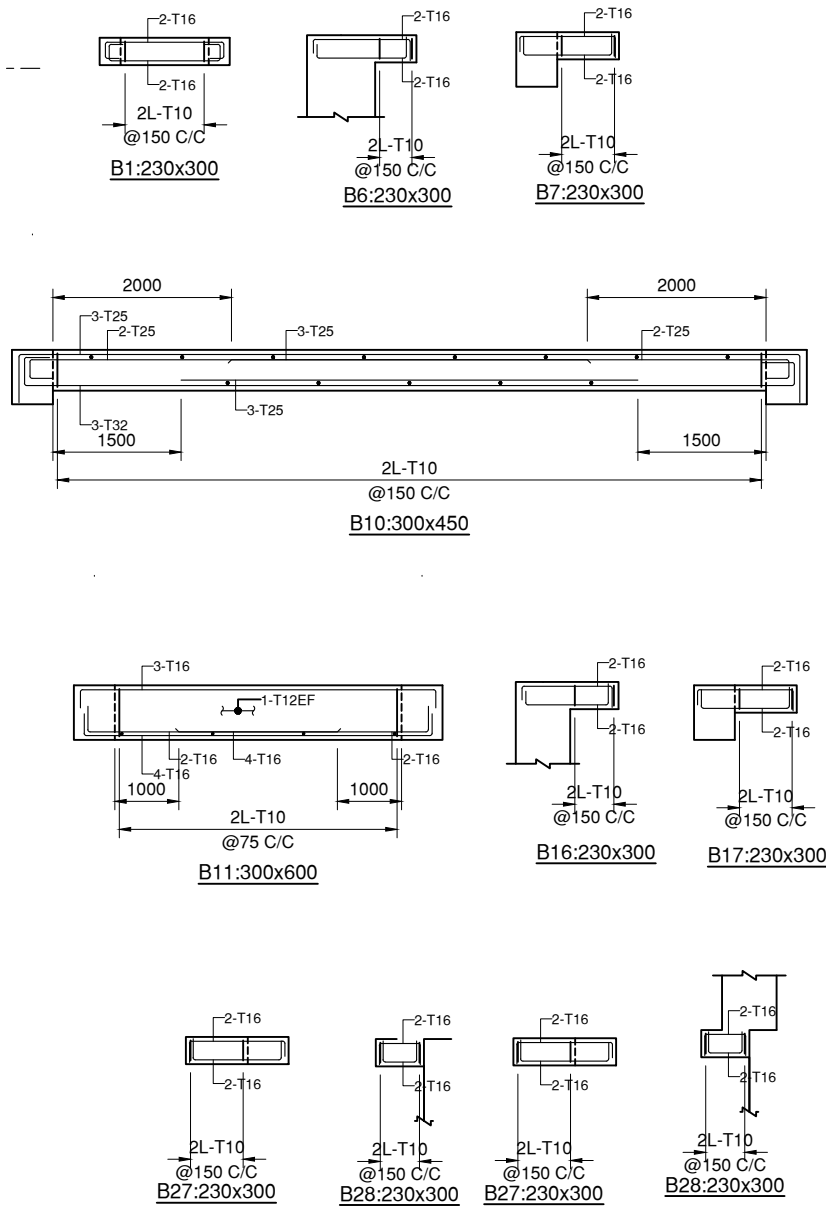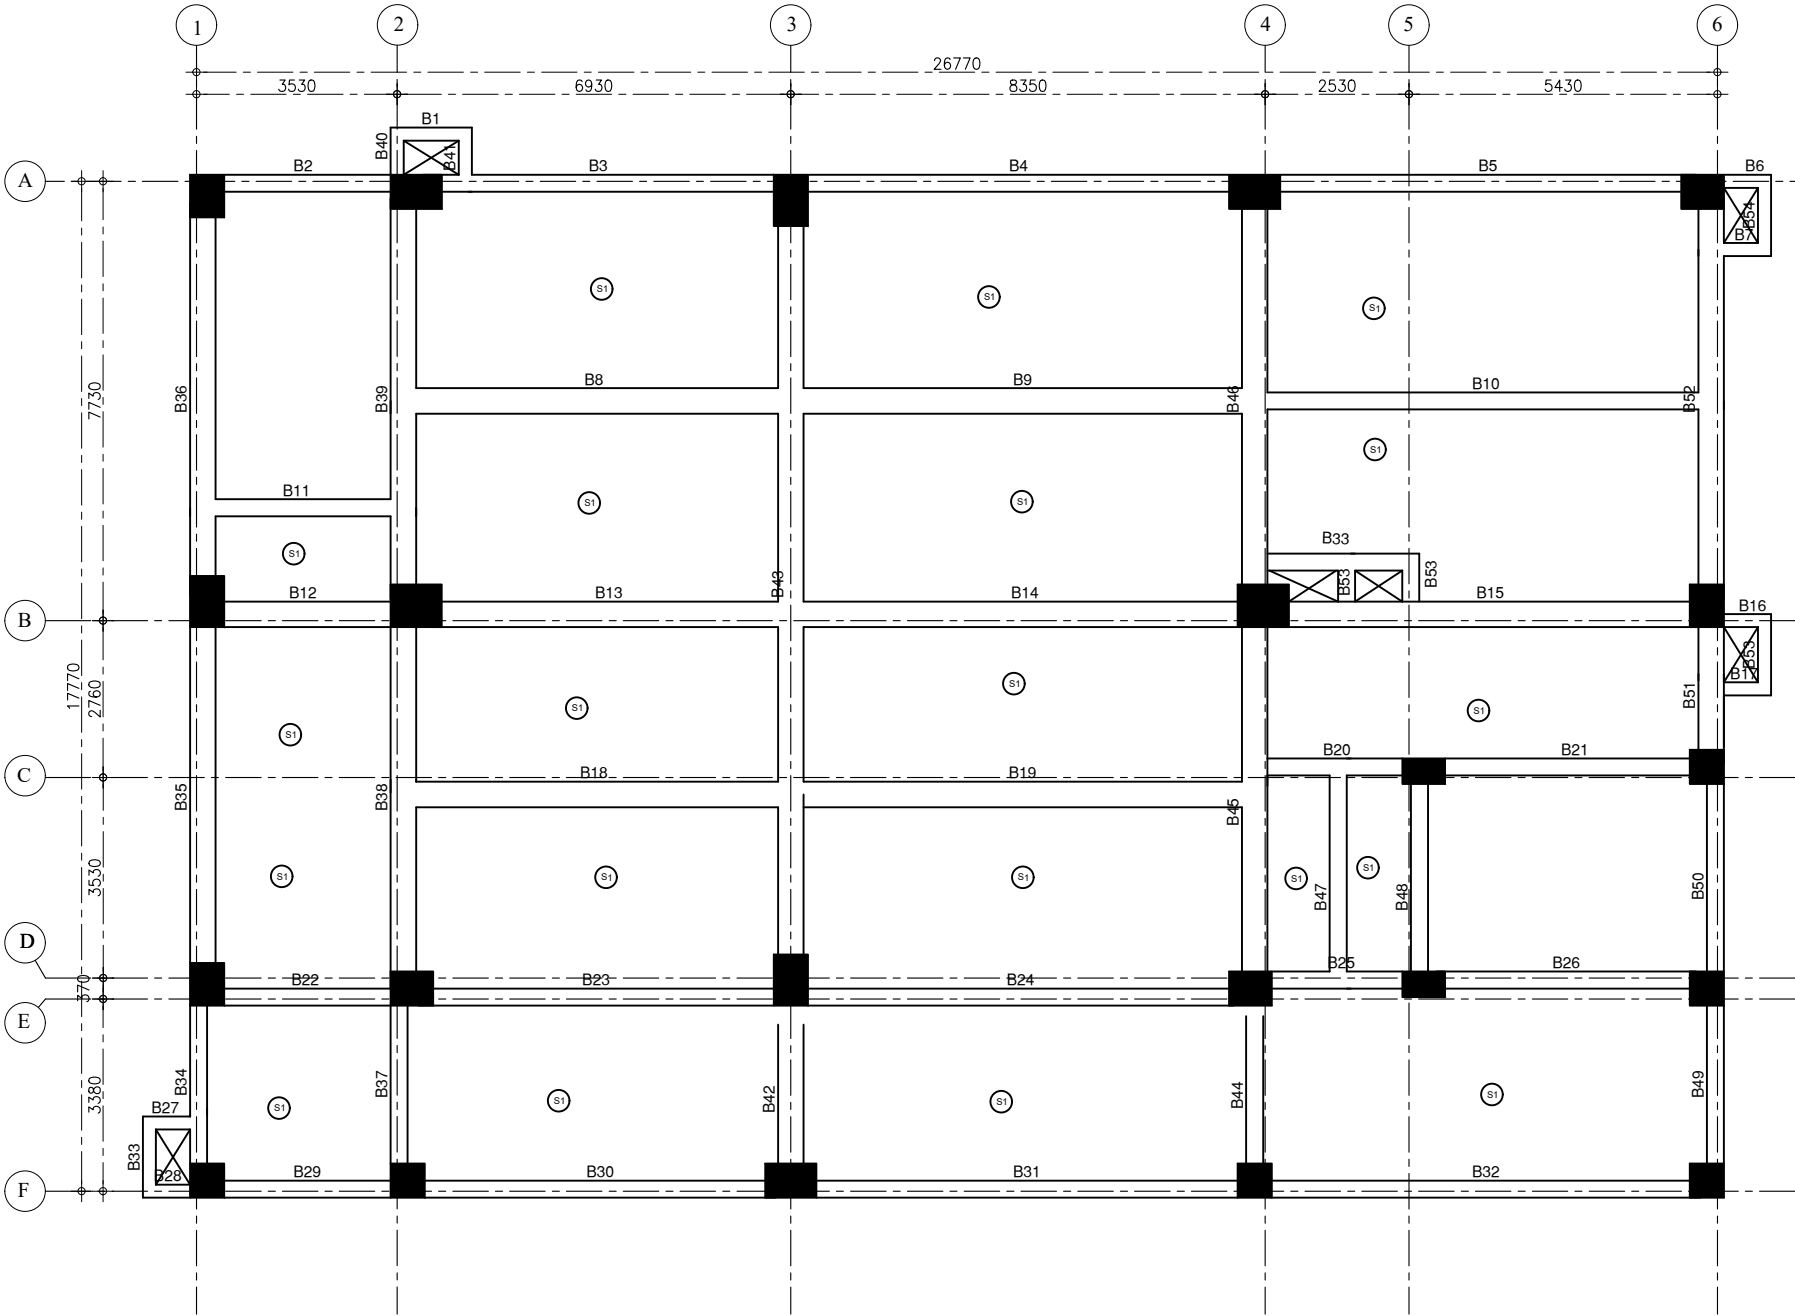














- NOTES:-**
1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
 2. THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
 3. DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
 4. WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
 5. REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
 6. REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
 7. ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
 8. LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d_{dia} OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
 9. CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM, RCC WALL - 30MM.
 10. ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
 11. CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
 12. THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
 13. PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
 14. CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
 15. THE BUILDING HAS BEEN DESIGNED FOR G+1. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.

TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	COMMUNITY CENTER	
DRAWING TITLE	ROOF BEAM LAYOUT AND REINFORCEMENT DETAILS	
DRG. NO.	MITES/BLD/STR/TD/CS/139	
NORTH	SCALE	DATE
	NTS	AUGUST 2025

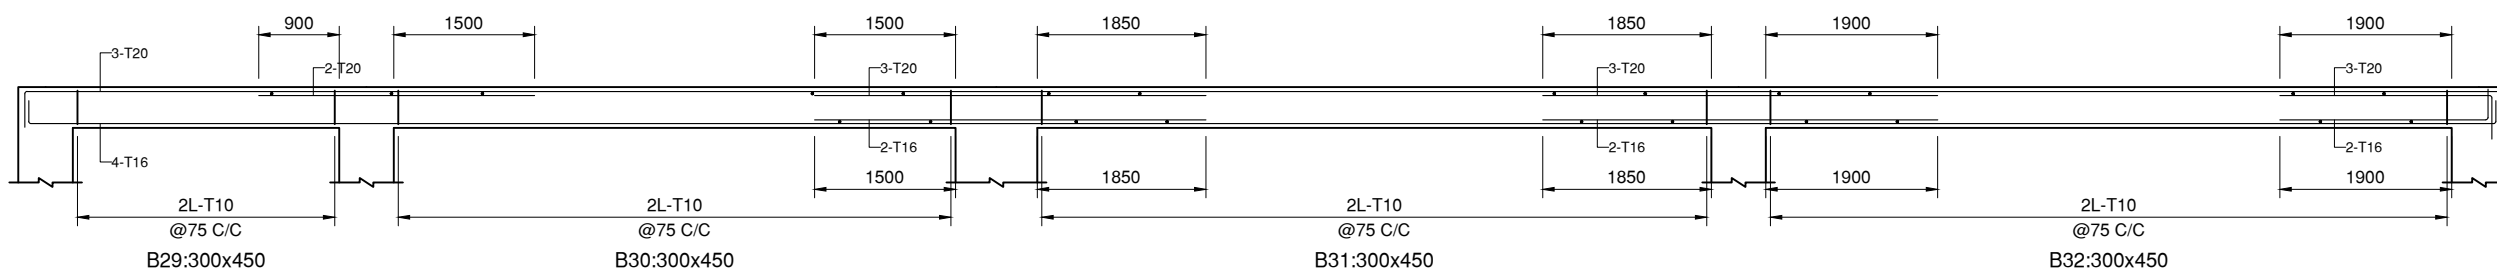

CLIENT	OIL INDIA LIMITED (A Govt. of India Enterprise)		
CONSULTANT	RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)		
PROJECT	BQ WORKMEN HOUSING		
BUILDING	COMMUNITY CENTER		
DRAWING TITLE	ROOF BEAM REINFORCEMENT DETAILS		
DRG. NO.	RITES/BLD/STR/TD/CS/140		
NORTH	SCALE	DATE	
	NTS	AUGUST 2025	

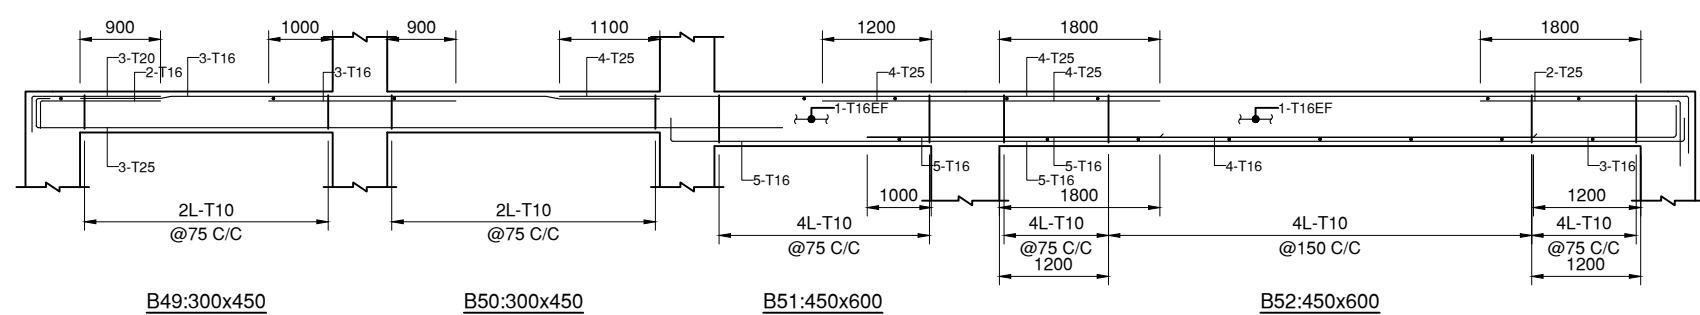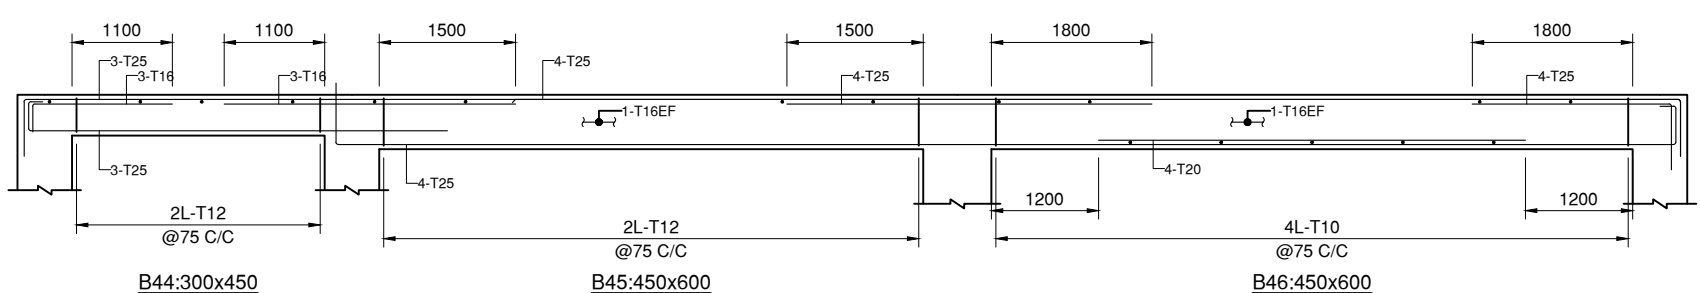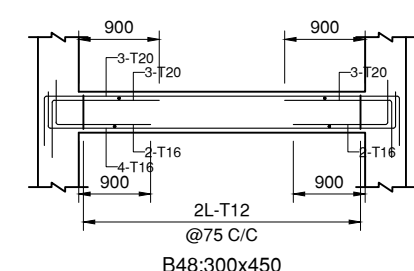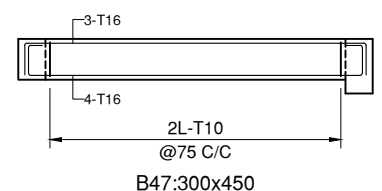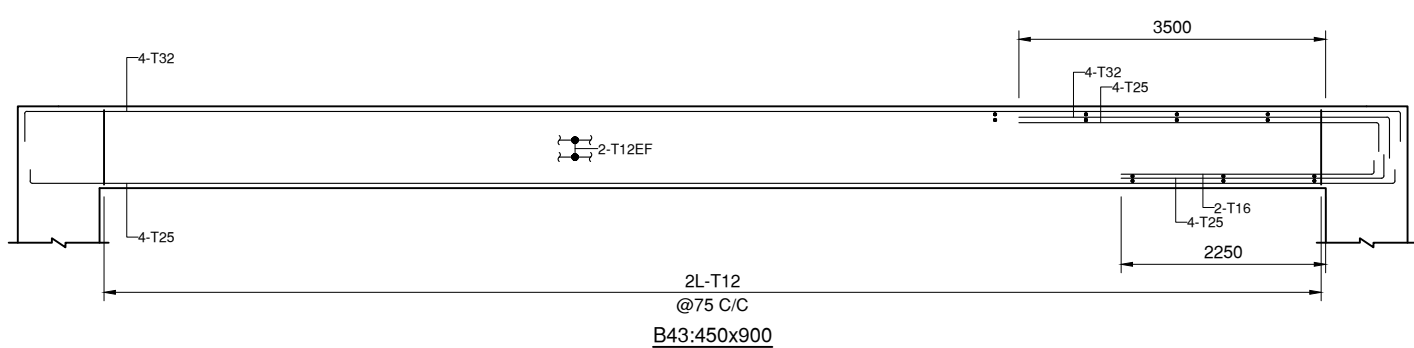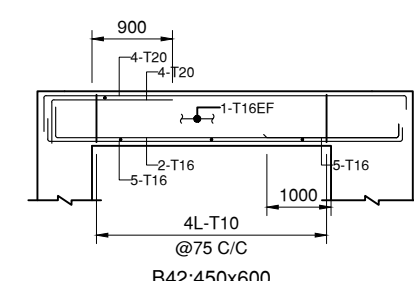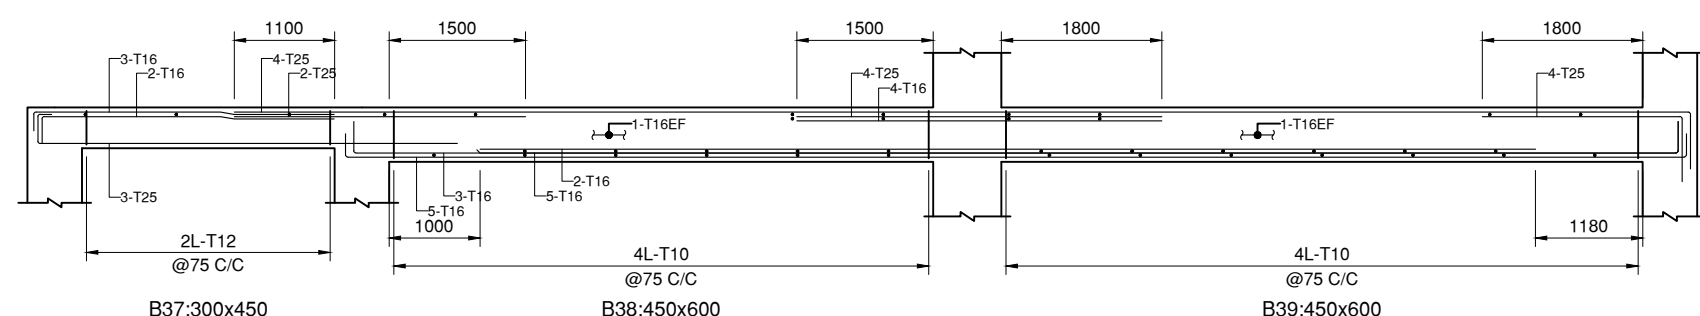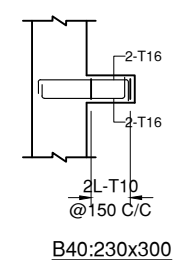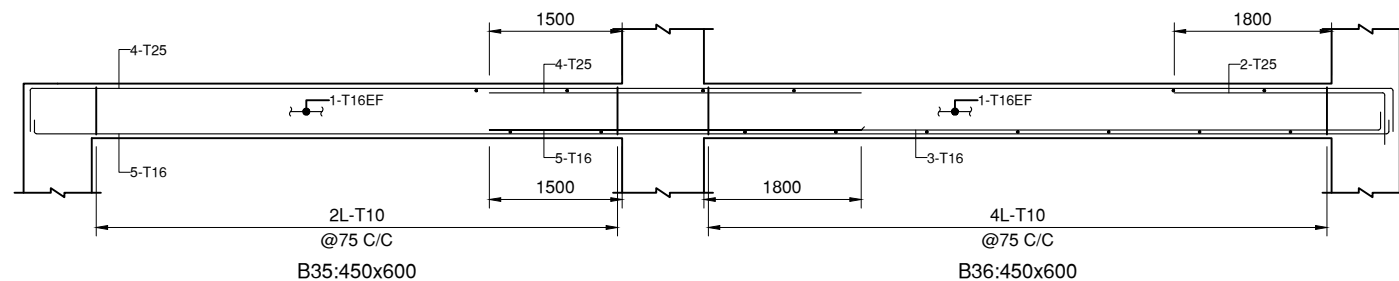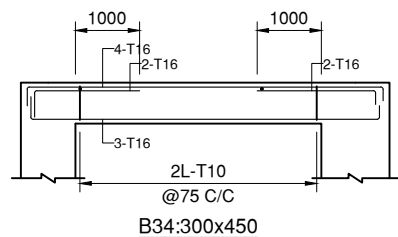

SLABS SCHEDULE DETAILS

S.NO	SLAB MARK	SLAB THICK	REINFORCEMENT			
			BOTTOM THRU BARS		TOP BARS	
			ALONG SHORT SPAN	ALONG LONG SPAN	ALONG SHORT SPAN	ALONG LONG SPAN
1.	S1	150	8@100C/C	8@100C/C	8@150C/C	8@150C/C

- NOTES:-
- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
 - THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
 - DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
 - WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
 - REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
 - REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
 - ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
 - LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d_{dia} OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
 - CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
 - ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
 - CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
 - THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
 - PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
 - CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
 - THE BUILDING HAS BEEN DESIGNED FOR G+1. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.

TENDER DRAWING

CLIENT

**OIL INDIA LIMITED**
(A Govt. of India Enterprise)

CONSULTANT

**THE INFRASTRUCTURE PEOPLE**
(A Govt. of India Enterprise)

PROJECT

BQ WORKMEN HOUSING

BUILDING

COMMUNITY CENTER

DRAWING TITLE

ROOF BEAM REINFORCEMENT DETAILS

DRG. NO.

MITES/BLD/STR/TD/CS/141

NORTH




SCALE










NTS

DATE

AUGUST 2025

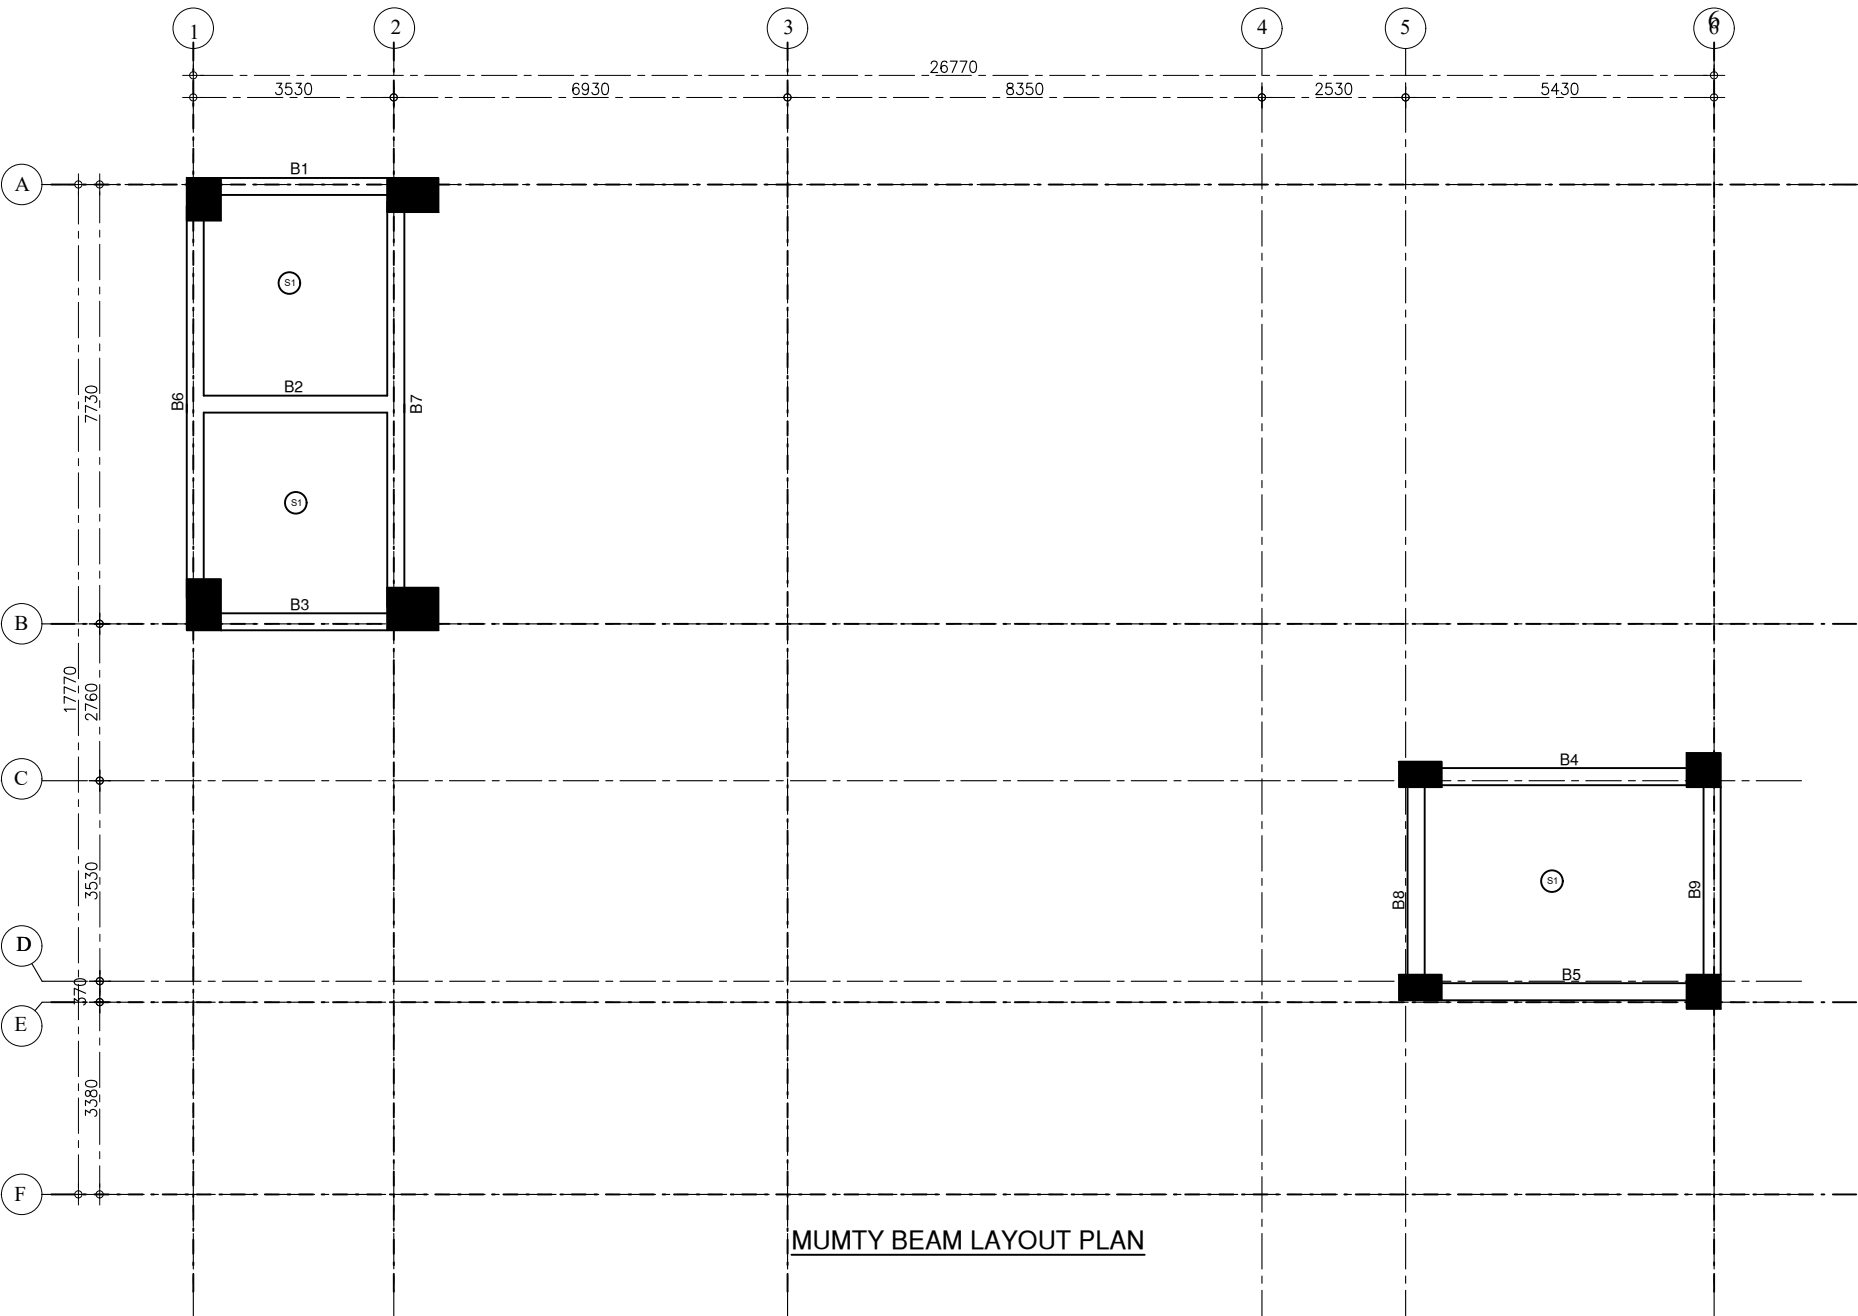

MUMTY BEAM LAYOUT PLAN

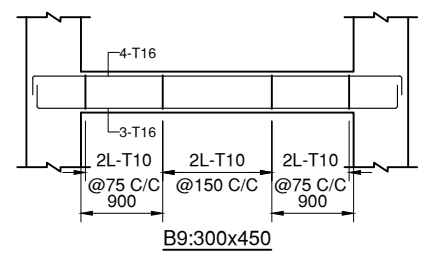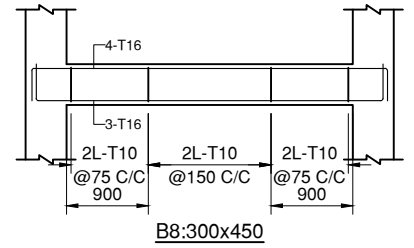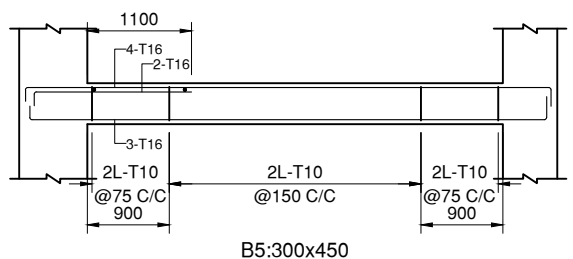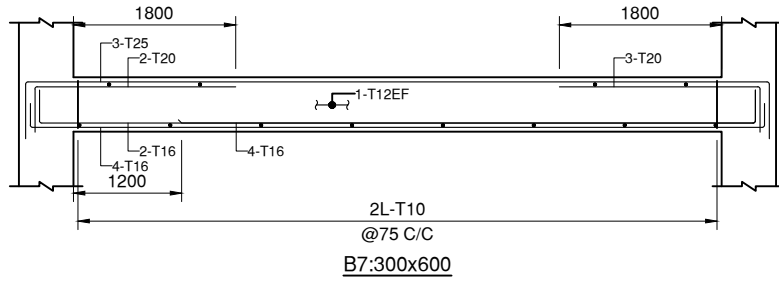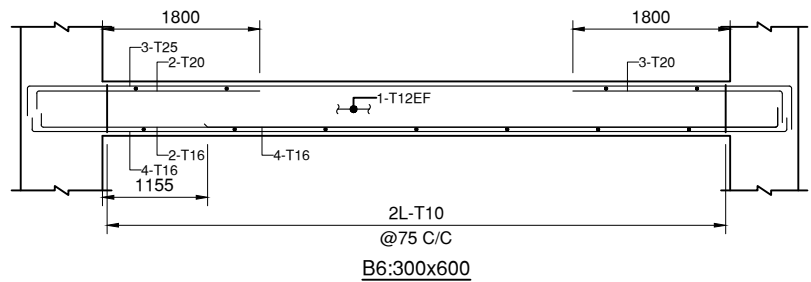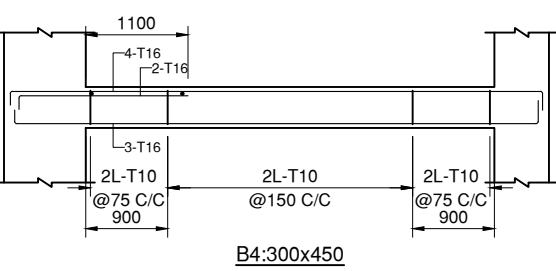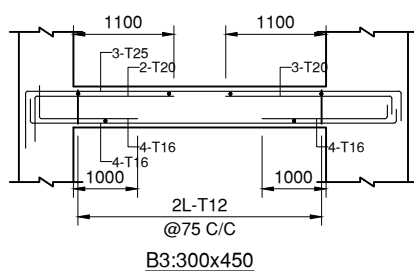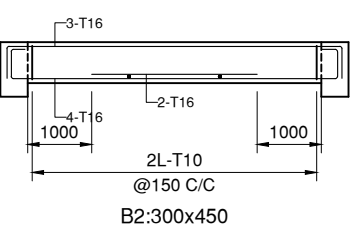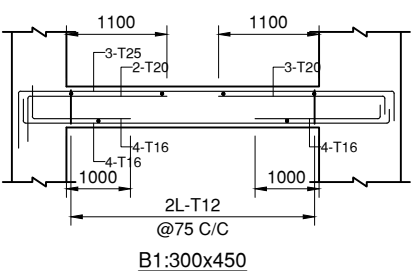

SLABS SCHEDULE DETAILS







S.NO	SLAB MARK	SLAB THICK	REINFORCEMENT			
			BOTTOM THRU BARS		TOP BARS	
			ALONG SHORT SPAN	ALONG LONG SPAN	ALONG SHORT SPAN	ALONG LONG SPAN
1.	S1	150	8@100C/C	8@100C/C	8@150C/C	8@150C/C

NOTES:-

- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
- THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
- DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
- WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
- REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
- REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
- ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
- LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47x d_{dia} OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
- CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
- ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
- CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
- THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
- PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
- CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONARY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
- THE BUILDING HAS BEEN DESIGNED FOR G+1. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.

TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)		
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)		
PROJECT	BQ WORKMEN HOUSING		
BUILDING	COMMUNITY CENTER		
DRAWING TITLE	MUMTY BEAM LAYOUT AND REINFORCEMENT DETAILS		
DRG. NO.	MITES/BLD/STR/TD/CS/142		
NORTH	SCALE	DATE	
	NTS	AUGUST 2025	

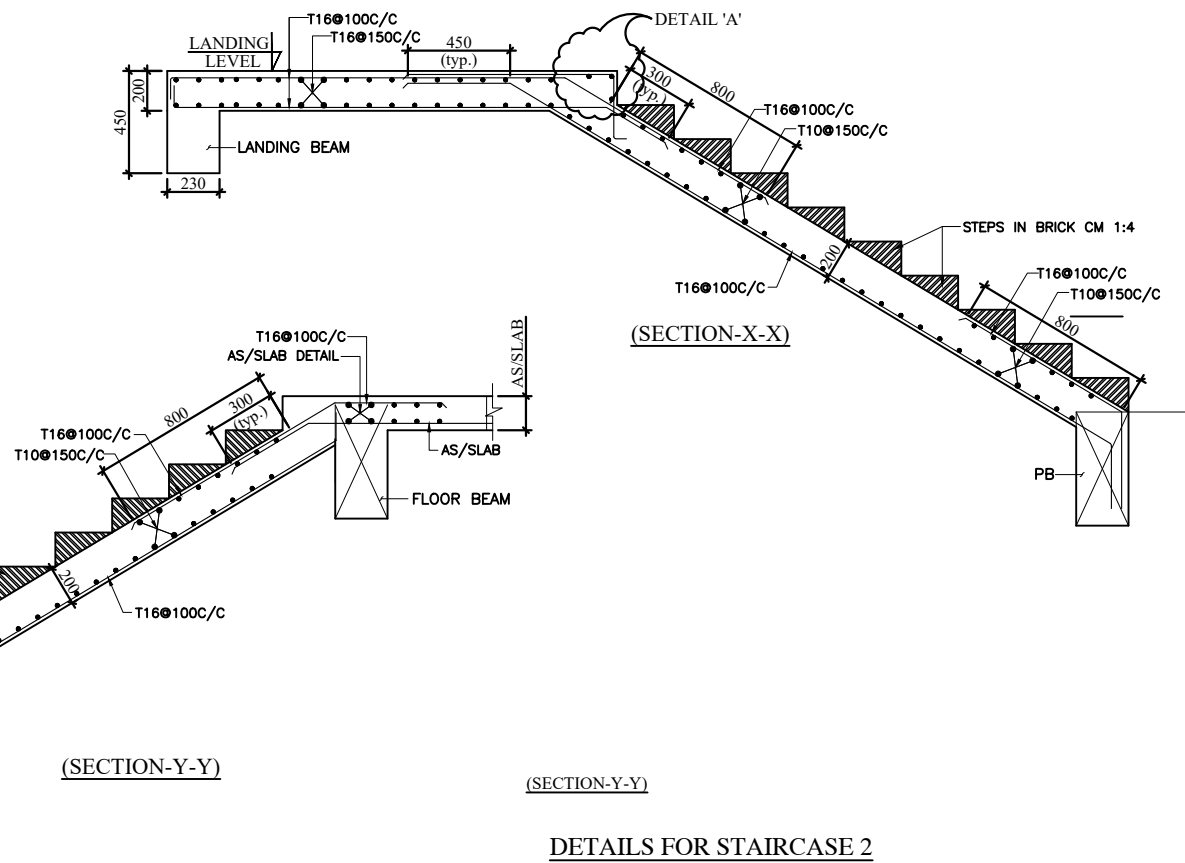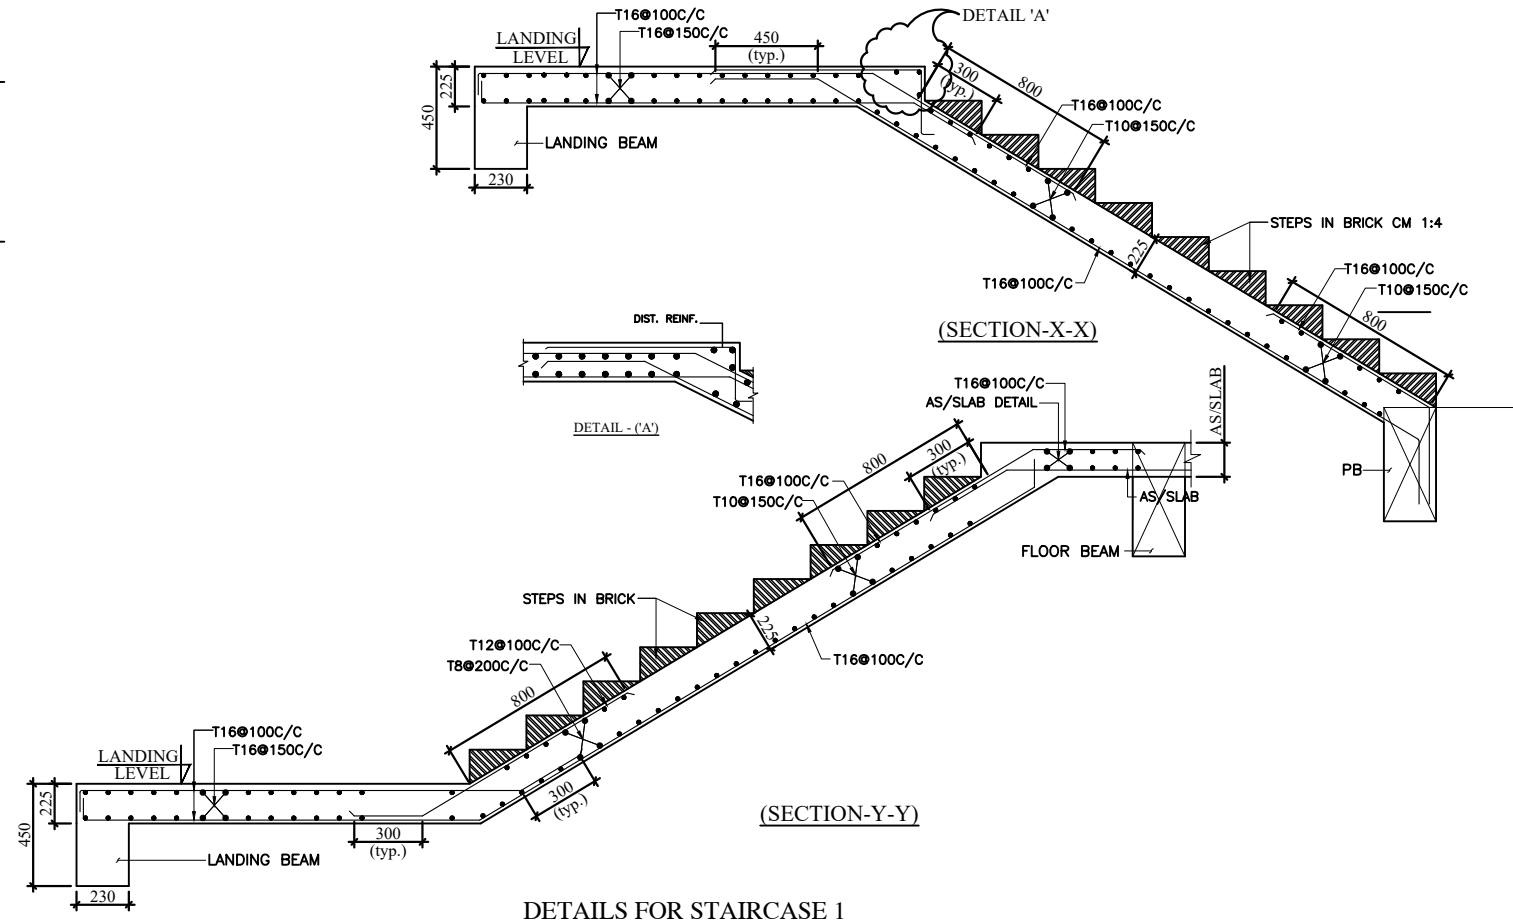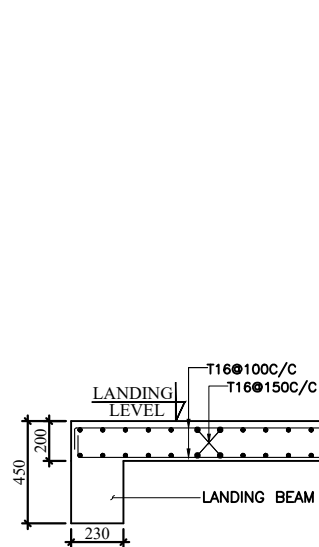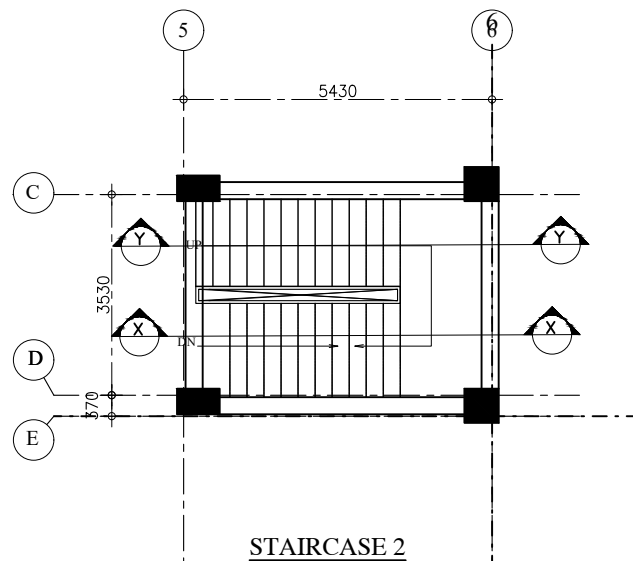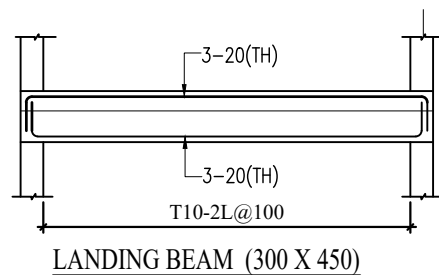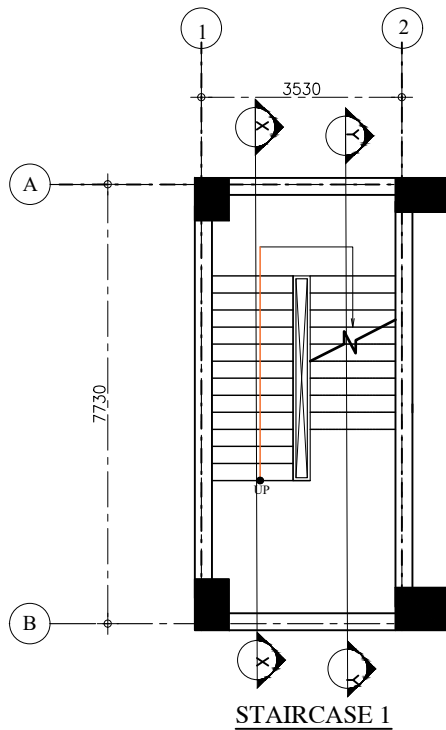

NOTE:-
NUMBER OF STEPS TO BE AS PER
ARCHITECTURAL DRAWINGS

NOTES:-

- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
- THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
- DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
- WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
- REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
- REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
- ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
- LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47 ϕ OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
- CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
- ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
- CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
- THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
- PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
- CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
- THE BUILDING HAS BEEN DESIGNED FOR G+1. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.

TENDER DRAWING

CLIENT



OIL INDIA LIMITED
(A Govt. of India Enterprise)

CONSULTANT



RITES
THE INFRASTRUCTURE PEOPLE
(A Govt. of India Enterprise)

PROJECT

BQ WORKMEN HOUSING

BUILDING

COMMUNITY CENTER

DRAWING TITLE

STAIRCASE DETAILS

DRG. NO.

RITES/BLD/STR/TD/CS/143

NORTH




SCALE


NTS

DATE


AUGUST 2025

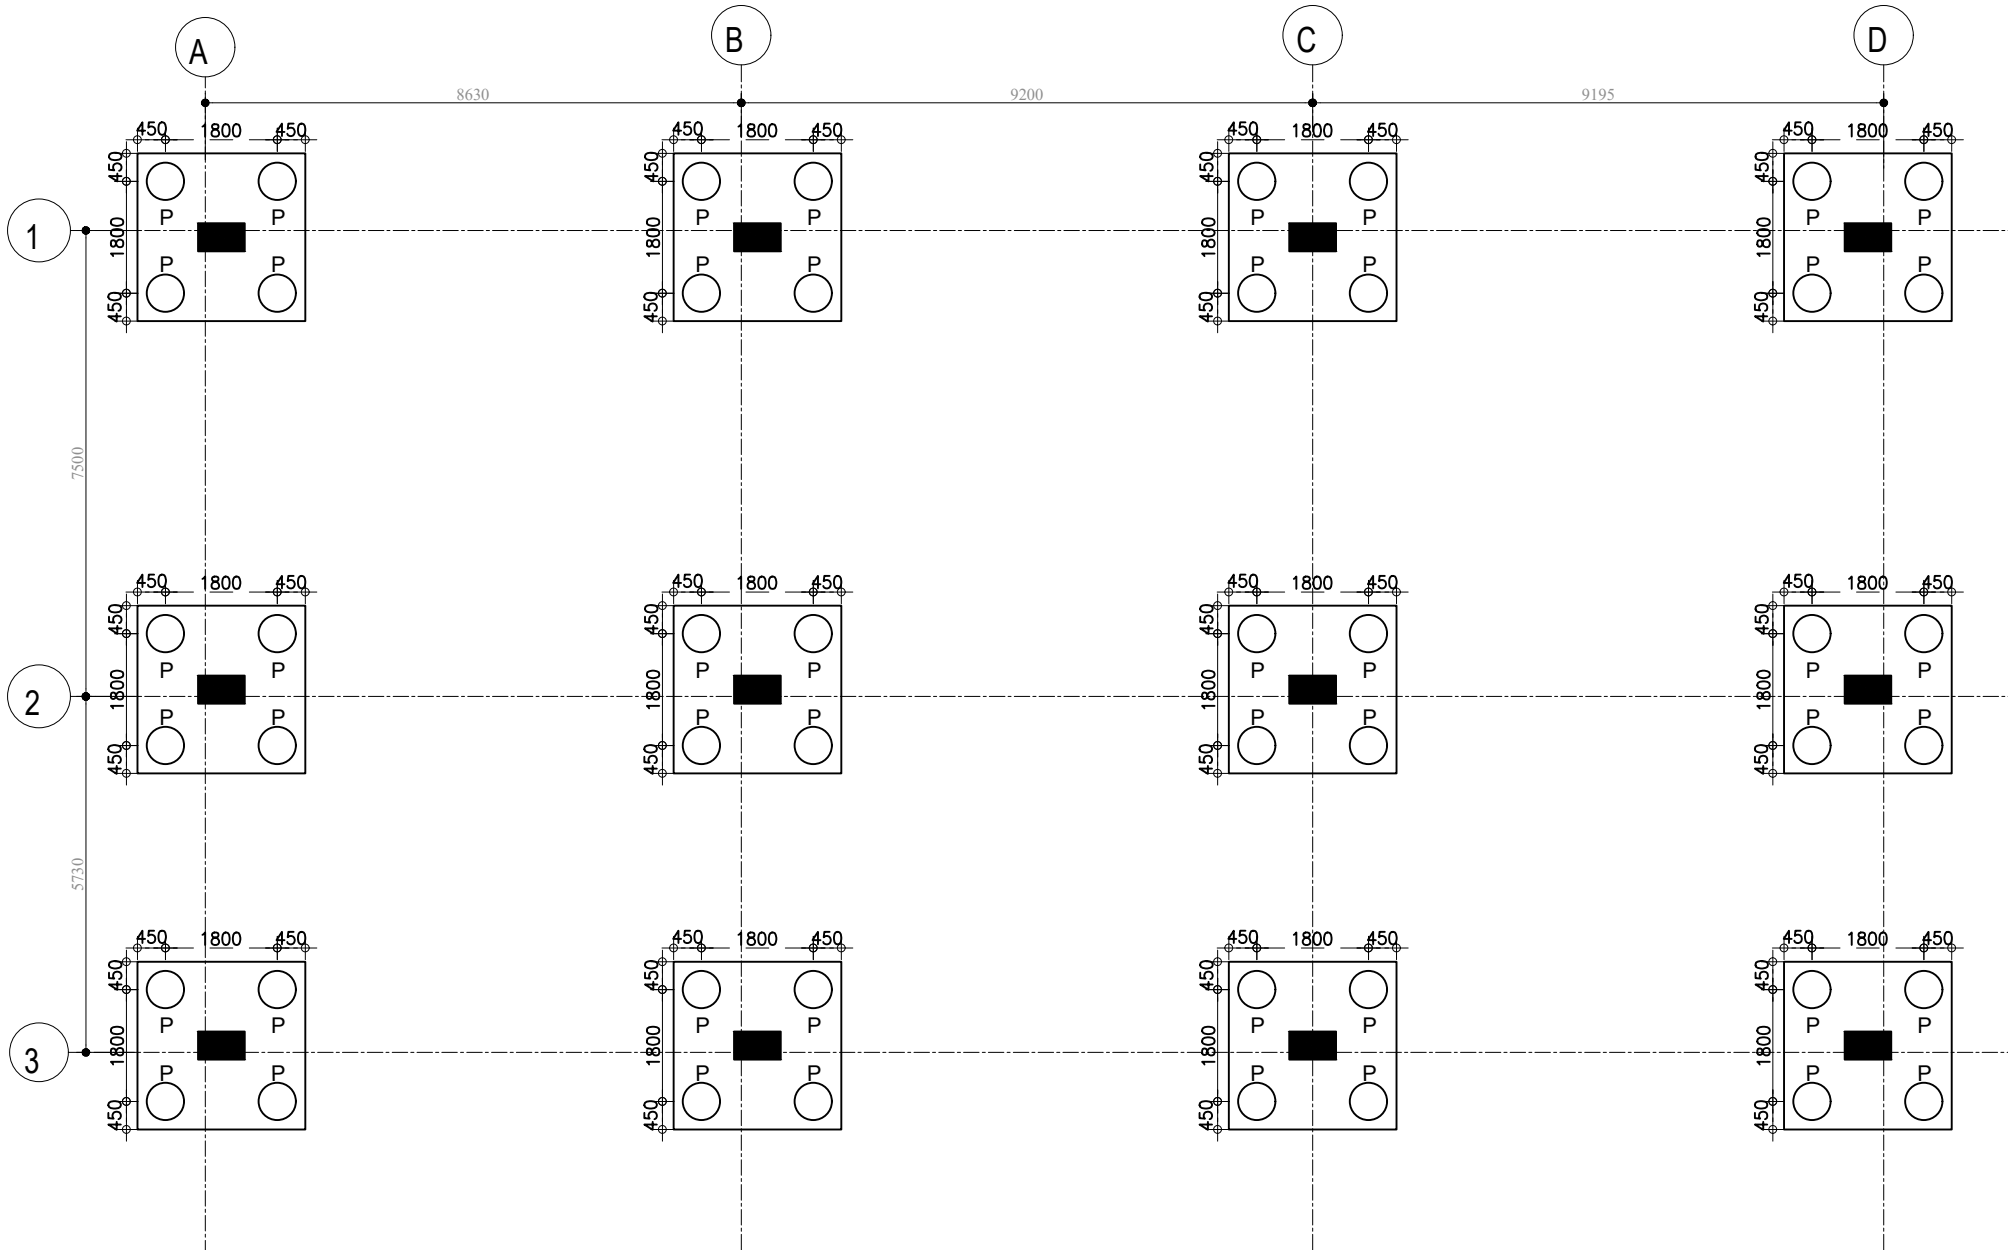

FOUNDATION LAYOUT PLAN

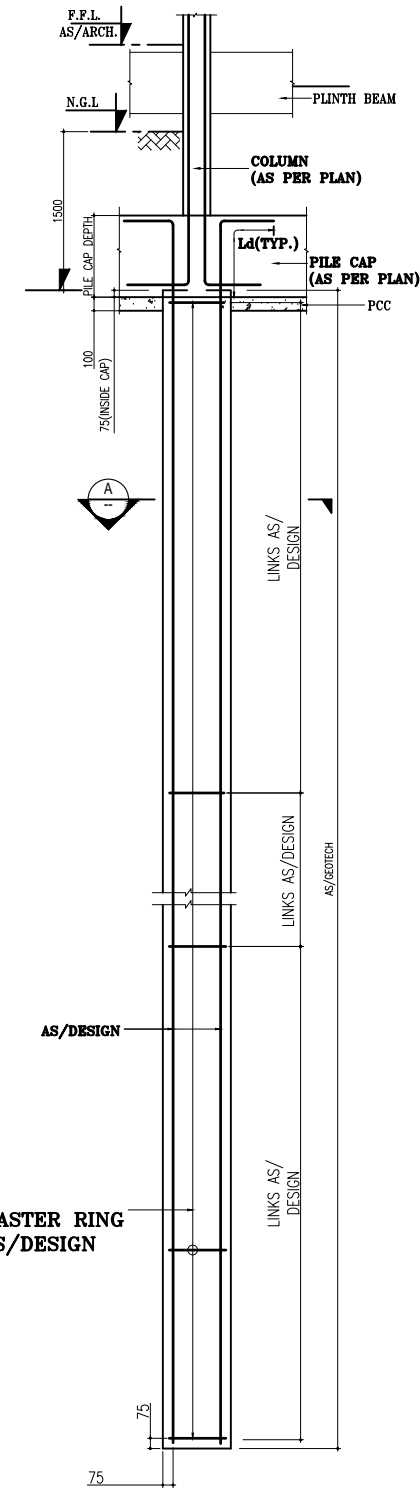


TYPICAL ELEVATION OF PILE (600MM DIA)

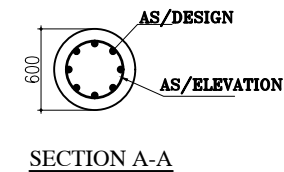

- NOTES:-
1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
 2. THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
 3. DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
 4. WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
 5. REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
 6. REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
 7. ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
 8. LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47Xdia OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
 9. CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
 10. ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
 11. CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
 12. THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
 13. PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
 14. CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
 15. THE BUILDING HAS BEEN DESIGNED FOR GROUND STOREY. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
 16. FOR 600# RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT. SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.
 17. THE STRUCTURAL MEMBER SIZES AND REINFORCEMENT DETAILS SHOWN IN THESE DRAWINGS ARE TENTATIVE AND INTENDED FOR GENERAL GUIDANCE ONLY. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO CARRY OUT THE FINAL DESIGN, DETAILING, AND STABILITY VERIFICATION IN ACCORDANCE WITH APPLICABLE CODES AND ACTUAL SITE CONDITIONS. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ENSURING THE SAFETY, SERVICEABILITY, AND DURABILITY OF THE STRUCTURE DURING CONSTRUCTION AND THROUGHOUT ITS SERVICE LIFE. ANY DISCREPANCY OR DEVIATION SHALL BE REPORTED TO THE ENGINEER FOR REVIEW PRIOR TO EXECUTION.


TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	ELECTRICAL SUB STATION	
DRAWING TITLE	FOUNDATION LAYOUT PLAN	
DRG. NO.	RITES/BLD/STR/TD/ESS/144	
NORTH	SCALE	DATE
	NTS	AUGUST 2025

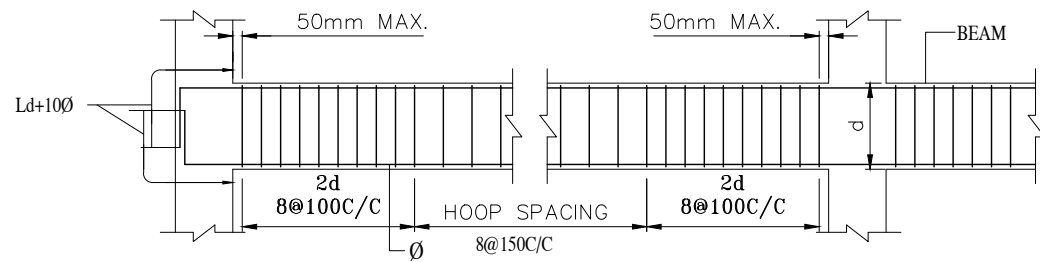


Ld=DEVELOPMENT LENGTH
d= DEPTH OF BEAM
Ø= DIAMETER OF BAR

TYPICAL BEAM SHEAR R/F DETAIL

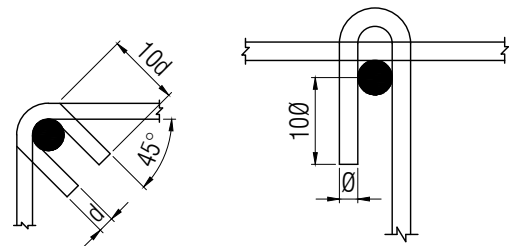


FOR 135° HOOK FOR 180° HOOK

TYPICAL HOOK DETAIL

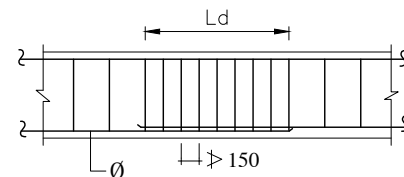


Ld = DEVELOPMENT
LENGTH IN TENSION
Ø = BAR DIAMETER

LAP DETAIL IN BEAM

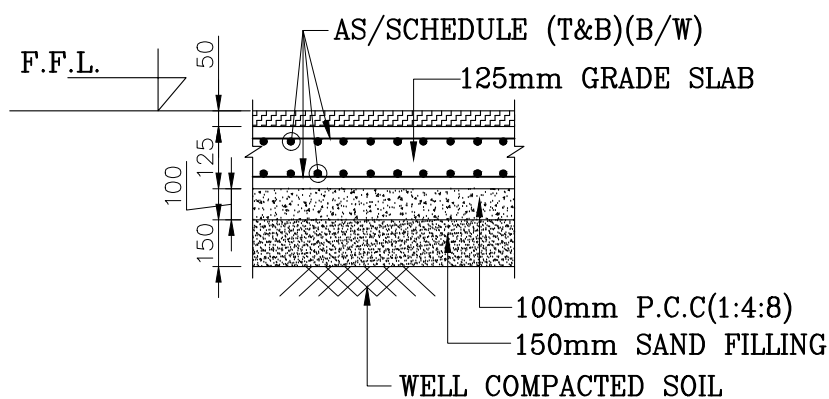

TYPICAL GRADE SLAB DETAIL

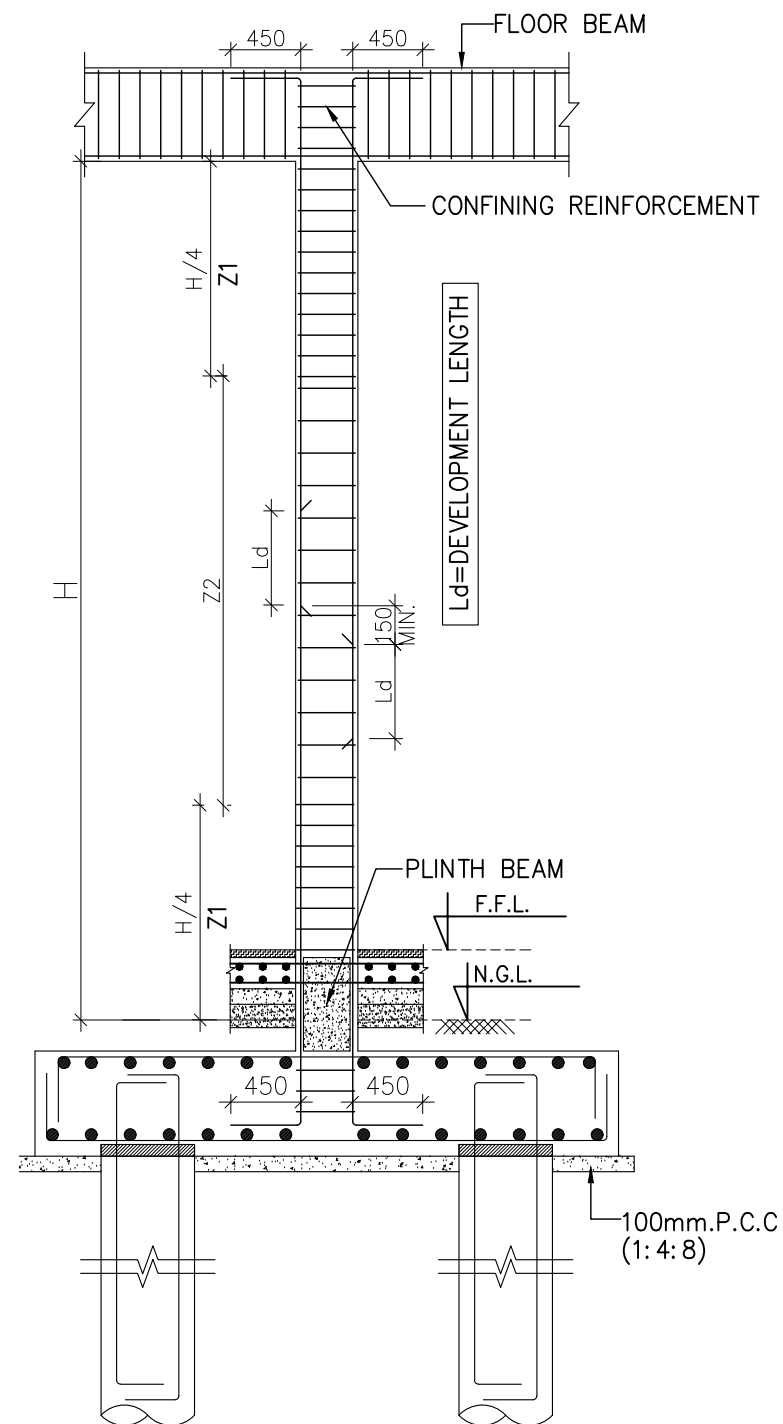

**TYPICAL DETAILS FOR LAP
& RING SPACING IN COLUMN
DETAIL-A**

IMPORTANT NOTE:-


1. SOIL SHOULD BE TESTED AT SITE FOR SBC/PILE LOAD CARRYING CAPACITY BEFORE THE COMMENCEMENT OF THE WORK.

NOTES:-


1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
2. THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
3. DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
4. WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
5. REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
6. REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
7. ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
8. LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47Xdia OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
9. CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
10. ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
11. CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
12. THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
13. PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
14. CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONRY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
15. THE BUILDING HAS BEEN DESIGNED FOR GROUND STOREY. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
16. FOR 600Ø RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT. SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.
17. THE STRUCTURAL MEMBER SIZES AND REINFORCEMENT DETAILS SHOWN IN THESE DRAWINGS ARE TENTATIVE AND INTENDED FOR GENERAL GUIDANCE ONLY. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO CARRY OUT THE FINAL DESIGN, DETAILING, AND STABILITY VERIFICATION IN ACCORDANCE WITH APPLICABLE CODES AND ACTUAL SITE CONDITIONS. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ENSURING THE SAFETY, SERVICEABILITY, AND DURABILITY OF THE STRUCTURE DURING CONSTRUCTION AND THROUGHOUT ITS SERVICE LIFE. ANY DISCREPANCY OR DEVIATION SHALL BE REPORTED TO THE ENGINEER FOR REVIEW PRIOR TO EXECUTION.

TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	ELECTRICAL SUB STATION	
DRAWING TITLE	TYPICAL DETAILS FOR PILE ,COLUMN AND BEAM	
DRG. NO.	RITES/BLD/STR/TD/ESS/145	
NORTH	SCALE	DATE
	NTS	AUGUST 2025

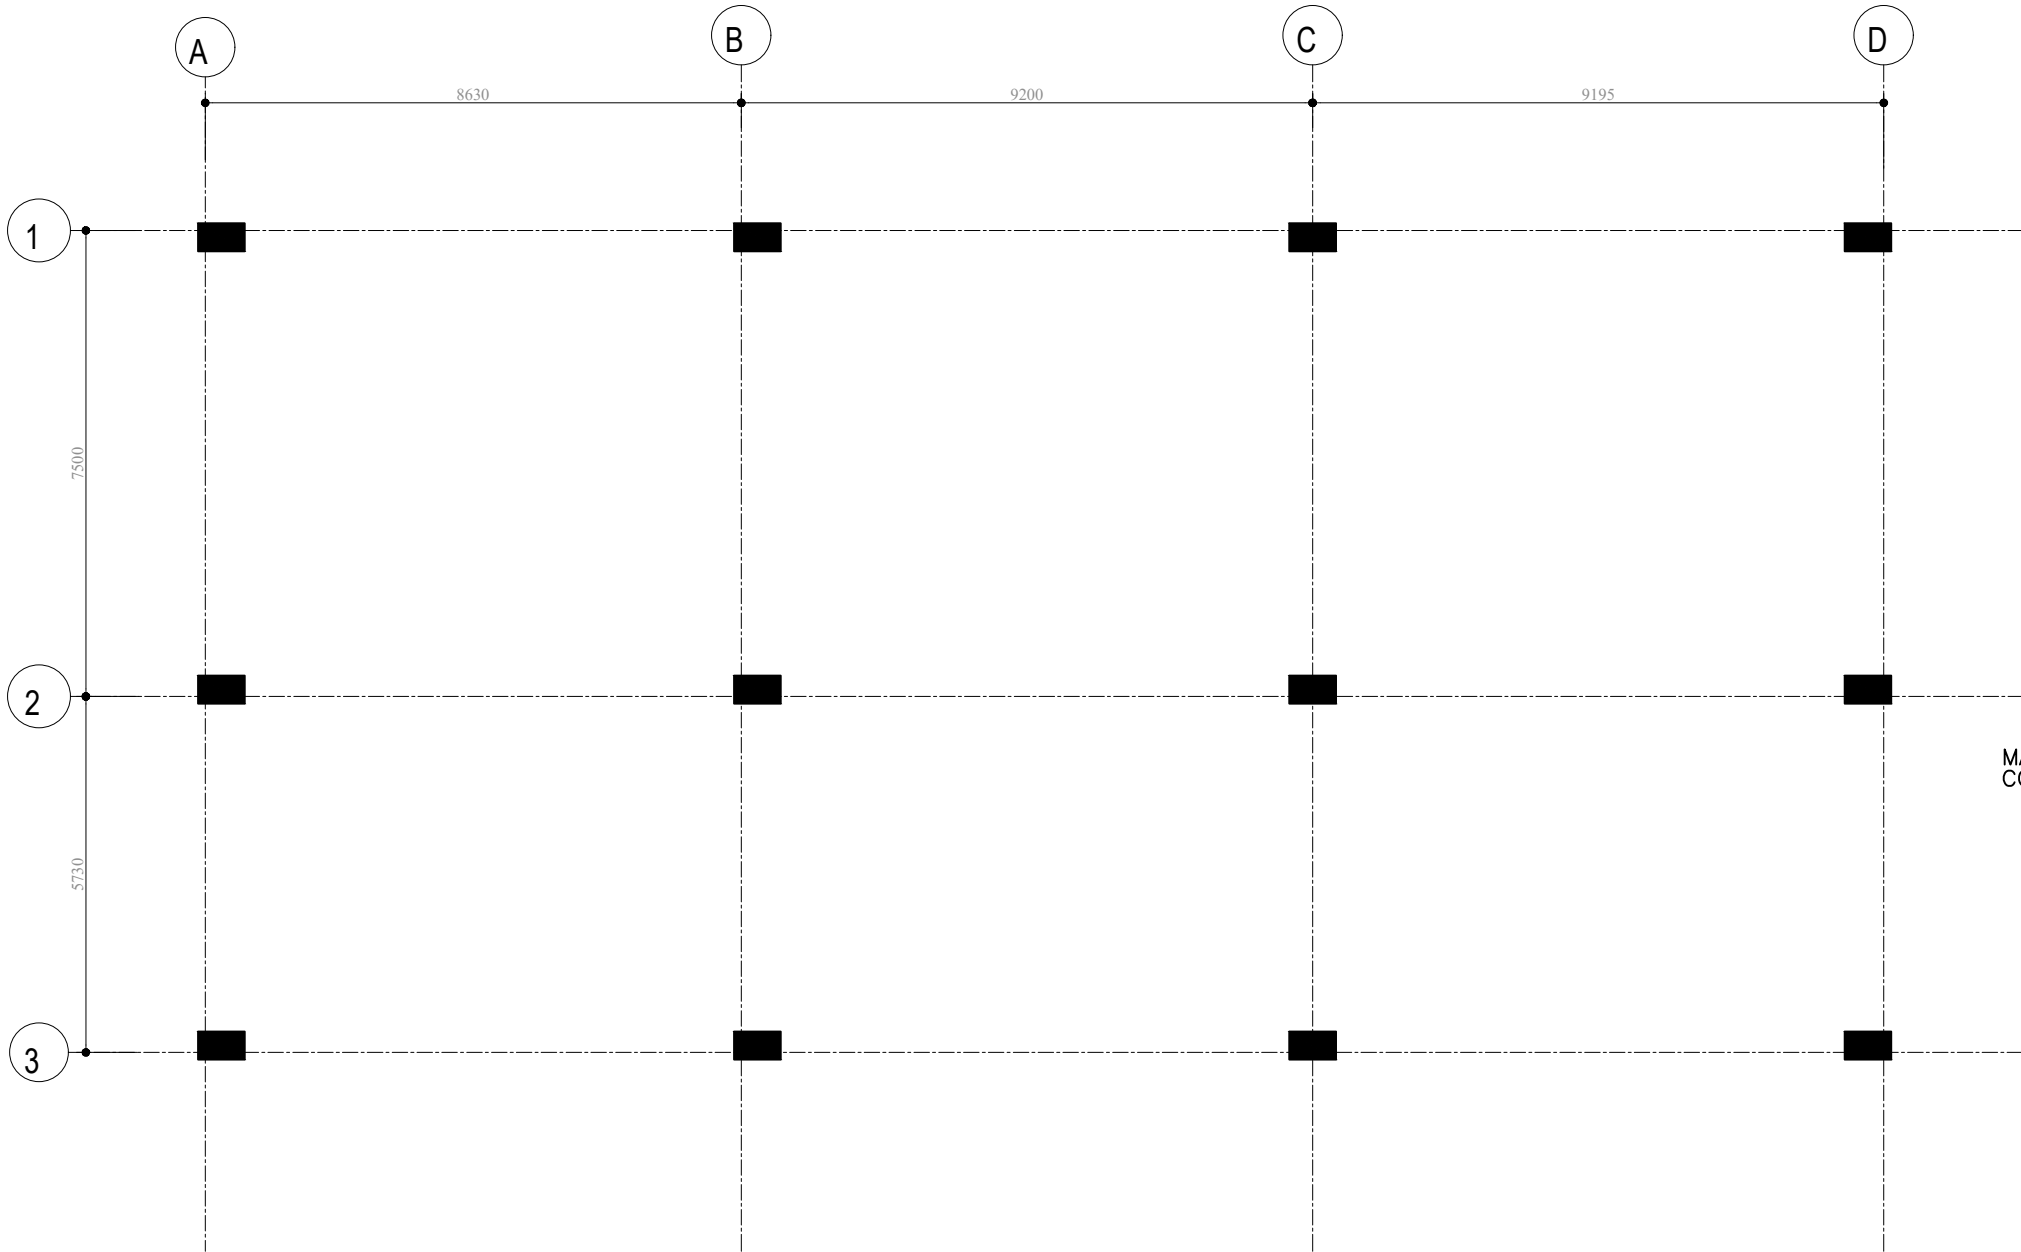


COLUMN LAYOUT PLAN

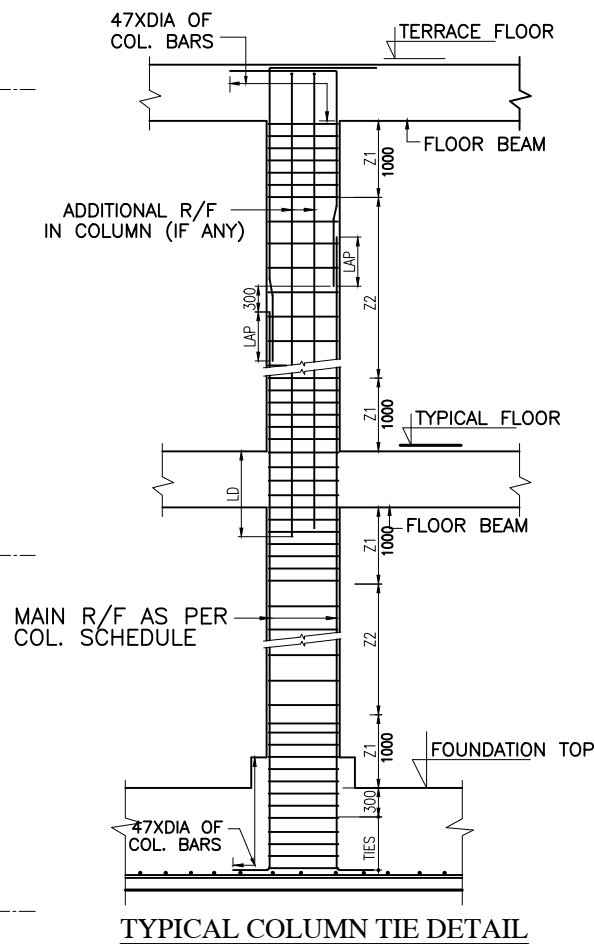

- NOTES:-
- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
 - THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
 - DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
 - WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
 - REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
 - REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
 - ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
 - LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47Xdia OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
 - CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
 - ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
 - CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
 - THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
 - PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
 - CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONARY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
 - THE BUILDING HAS BEEN DESIGNED FOR GROUND STOREY. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
 - FOR 600# RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT. SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.
 - THE STRUCTURAL MEMBER SIZES AND REINFORCEMENT DETAILS SHOWN IN THESE DRAWINGS ARE TENTATIVE AND INTENDED FOR GENERAL GUIDANCE ONLY. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO CARRY OUT THE FINAL DESIGN, DETAILING, AND STABILITY VERIFICATION IN ACCORDANCE WITH APPLICABLE CODES AND ACTUAL SITE CONDITIONS. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ENSURING THE SAFETY, SERVICEABILITY, AND DURABILITY OF THE STRUCTURE DURING CONSTRUCTION AND THROUGHOUT ITS SERVICE LIFE. ANY DISCREPANCY OR DEVIATION SHALL BE REPORTED TO THE ENGINEER FOR REVIEW PRIOR TO EXECUTION.

TENDER DRAWING		
CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	ELECTRICAL SUB STATION	
DRAWING TITLE	COLUMN LAYOUT PLAN	
DRG. NO.	RITES/BLD/STR/TD/ESS/146	
NORTH	SCALE	DATE
	NTS	AUGUST 2025

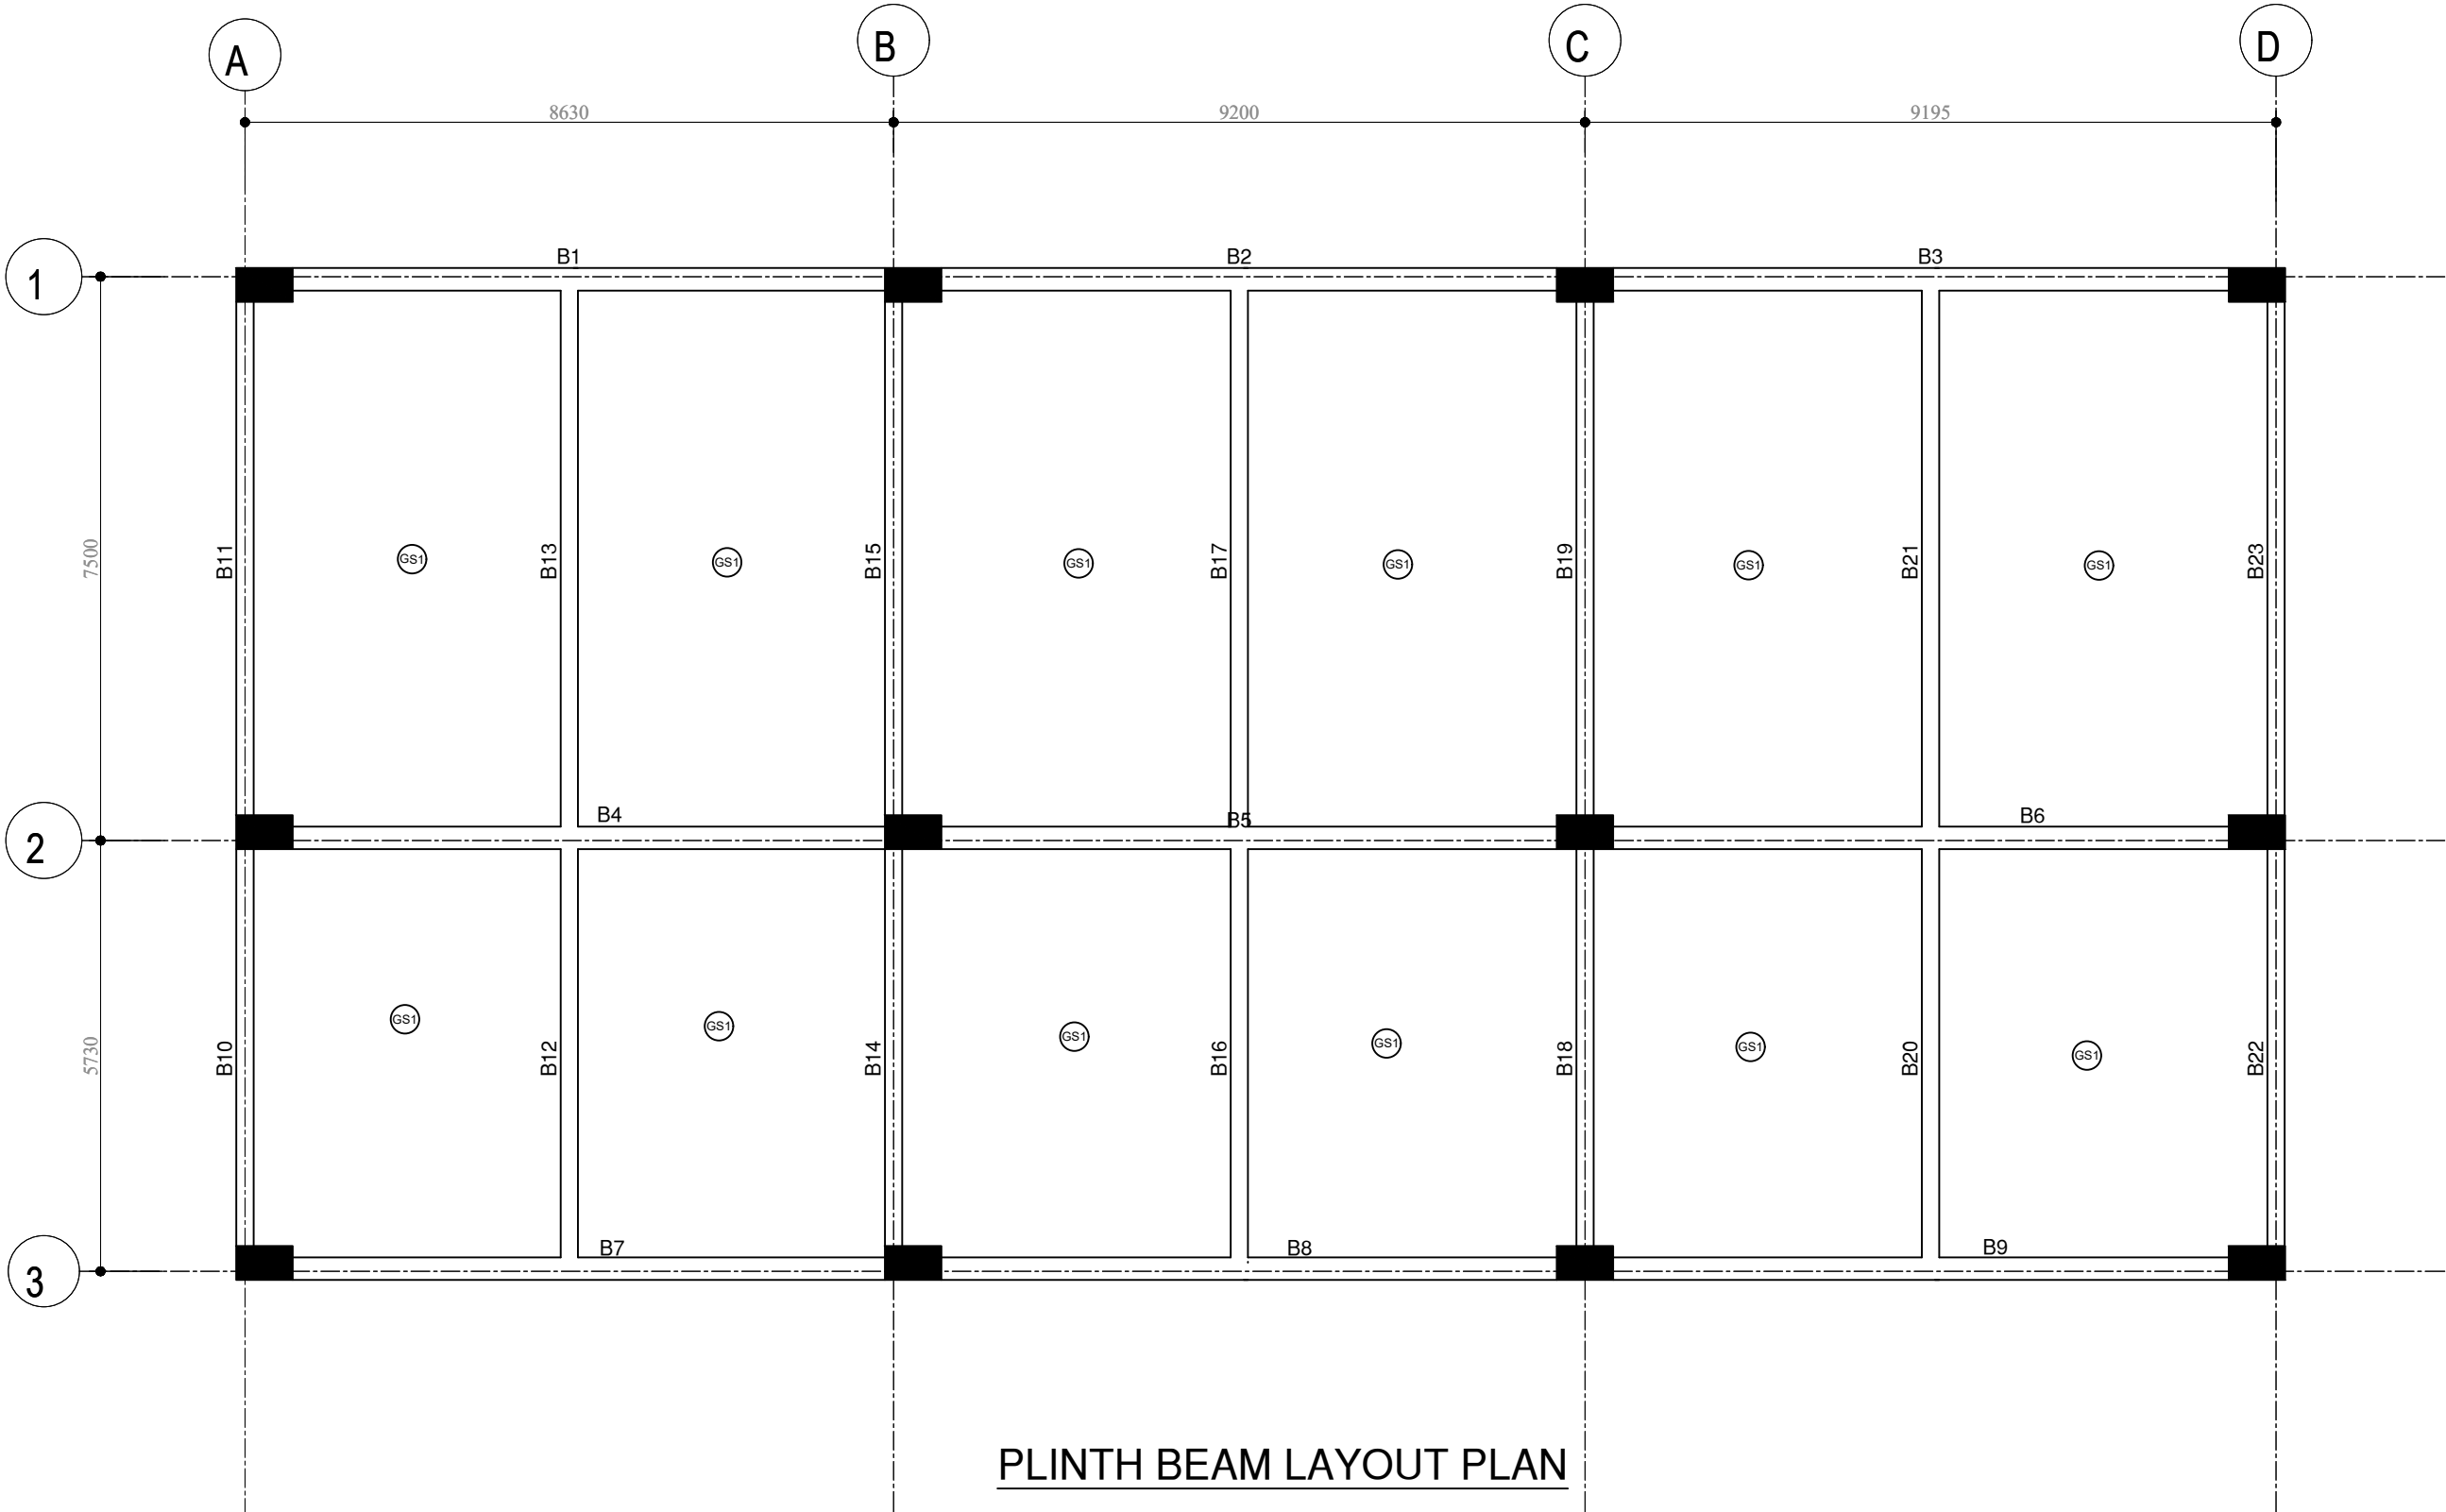

PLINTH BEAM LAYOUT PLAN

GRADE SLABS SCHEDULE DETAILS

S.NO	SLAB MARK	SLAB THICK	REINFORCEMENT			
			BOTTOM THRU BARS		TOP BARS	
			ALONG SHORT SPAN	ALONG LONG SPAN.	ALONG SHORT SPAN	ALONG LONG SPAN.
1.	GS1	150	10@125C/C	10@125C/C	10@125C/C	10@125C/C

- NOTES:-
- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
 - THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
 - DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
 - WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
 - REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
 - REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
 - ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
 - LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47Xdia OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
 - CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
 - ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
 - CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
 - THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
 - PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
 - CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONARY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
 - THE BUILDING HAS BEEN DESIGNED FOR GROUND STOREY. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
 - FOR 600# RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT. SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.
 - THE STRUCTURAL MEMBER SIZES AND REINFORCEMENT DETAILS SHOWN IN THESE DRAWINGS ARE TENTATIVE AND INTENDED FOR GENERAL GUIDANCE ONLY. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO CARRY OUT THE FINAL DESIGN, DETAILING, AND STABILITY VERIFICATION IN ACCORDANCE WITH APPLICABLE CODES AND ACTUAL SITE CONDITIONS. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ENSURING THE SAFETY, SERVICEABILITY, AND DURABILITY OF THE STRUCTURE DURING CONSTRUCTION AND THROUGHOUT ITS SERVICE LIFE. ANY DISCREPANCY OR DEVIATION SHALL BE REPORTED TO THE ENGINEER FOR REVIEW PRIOR TO EXECUTION.



TENDER DRAWING

CLIENT



OIL INDIA LIMITED
(A Govt. of India Enterprise)

CONSULTANT



RITES
THE INFRASTRUCTURE PEOPLE
(A Govt. of India Enterprise)

PROJECT

BQ WORKMEN HOUSING

BUILDING

ELECTRICAL SUB STATION

DRAWING TITLE

PLINTH BEAM LAYOUT PLAN AND GRADE SLAB SCHEDULE

DRG. NO.

RITES/BLD/STR/TD/ESS/147

NORTH




SCALE

NTS

DATE


AUGUST 2025

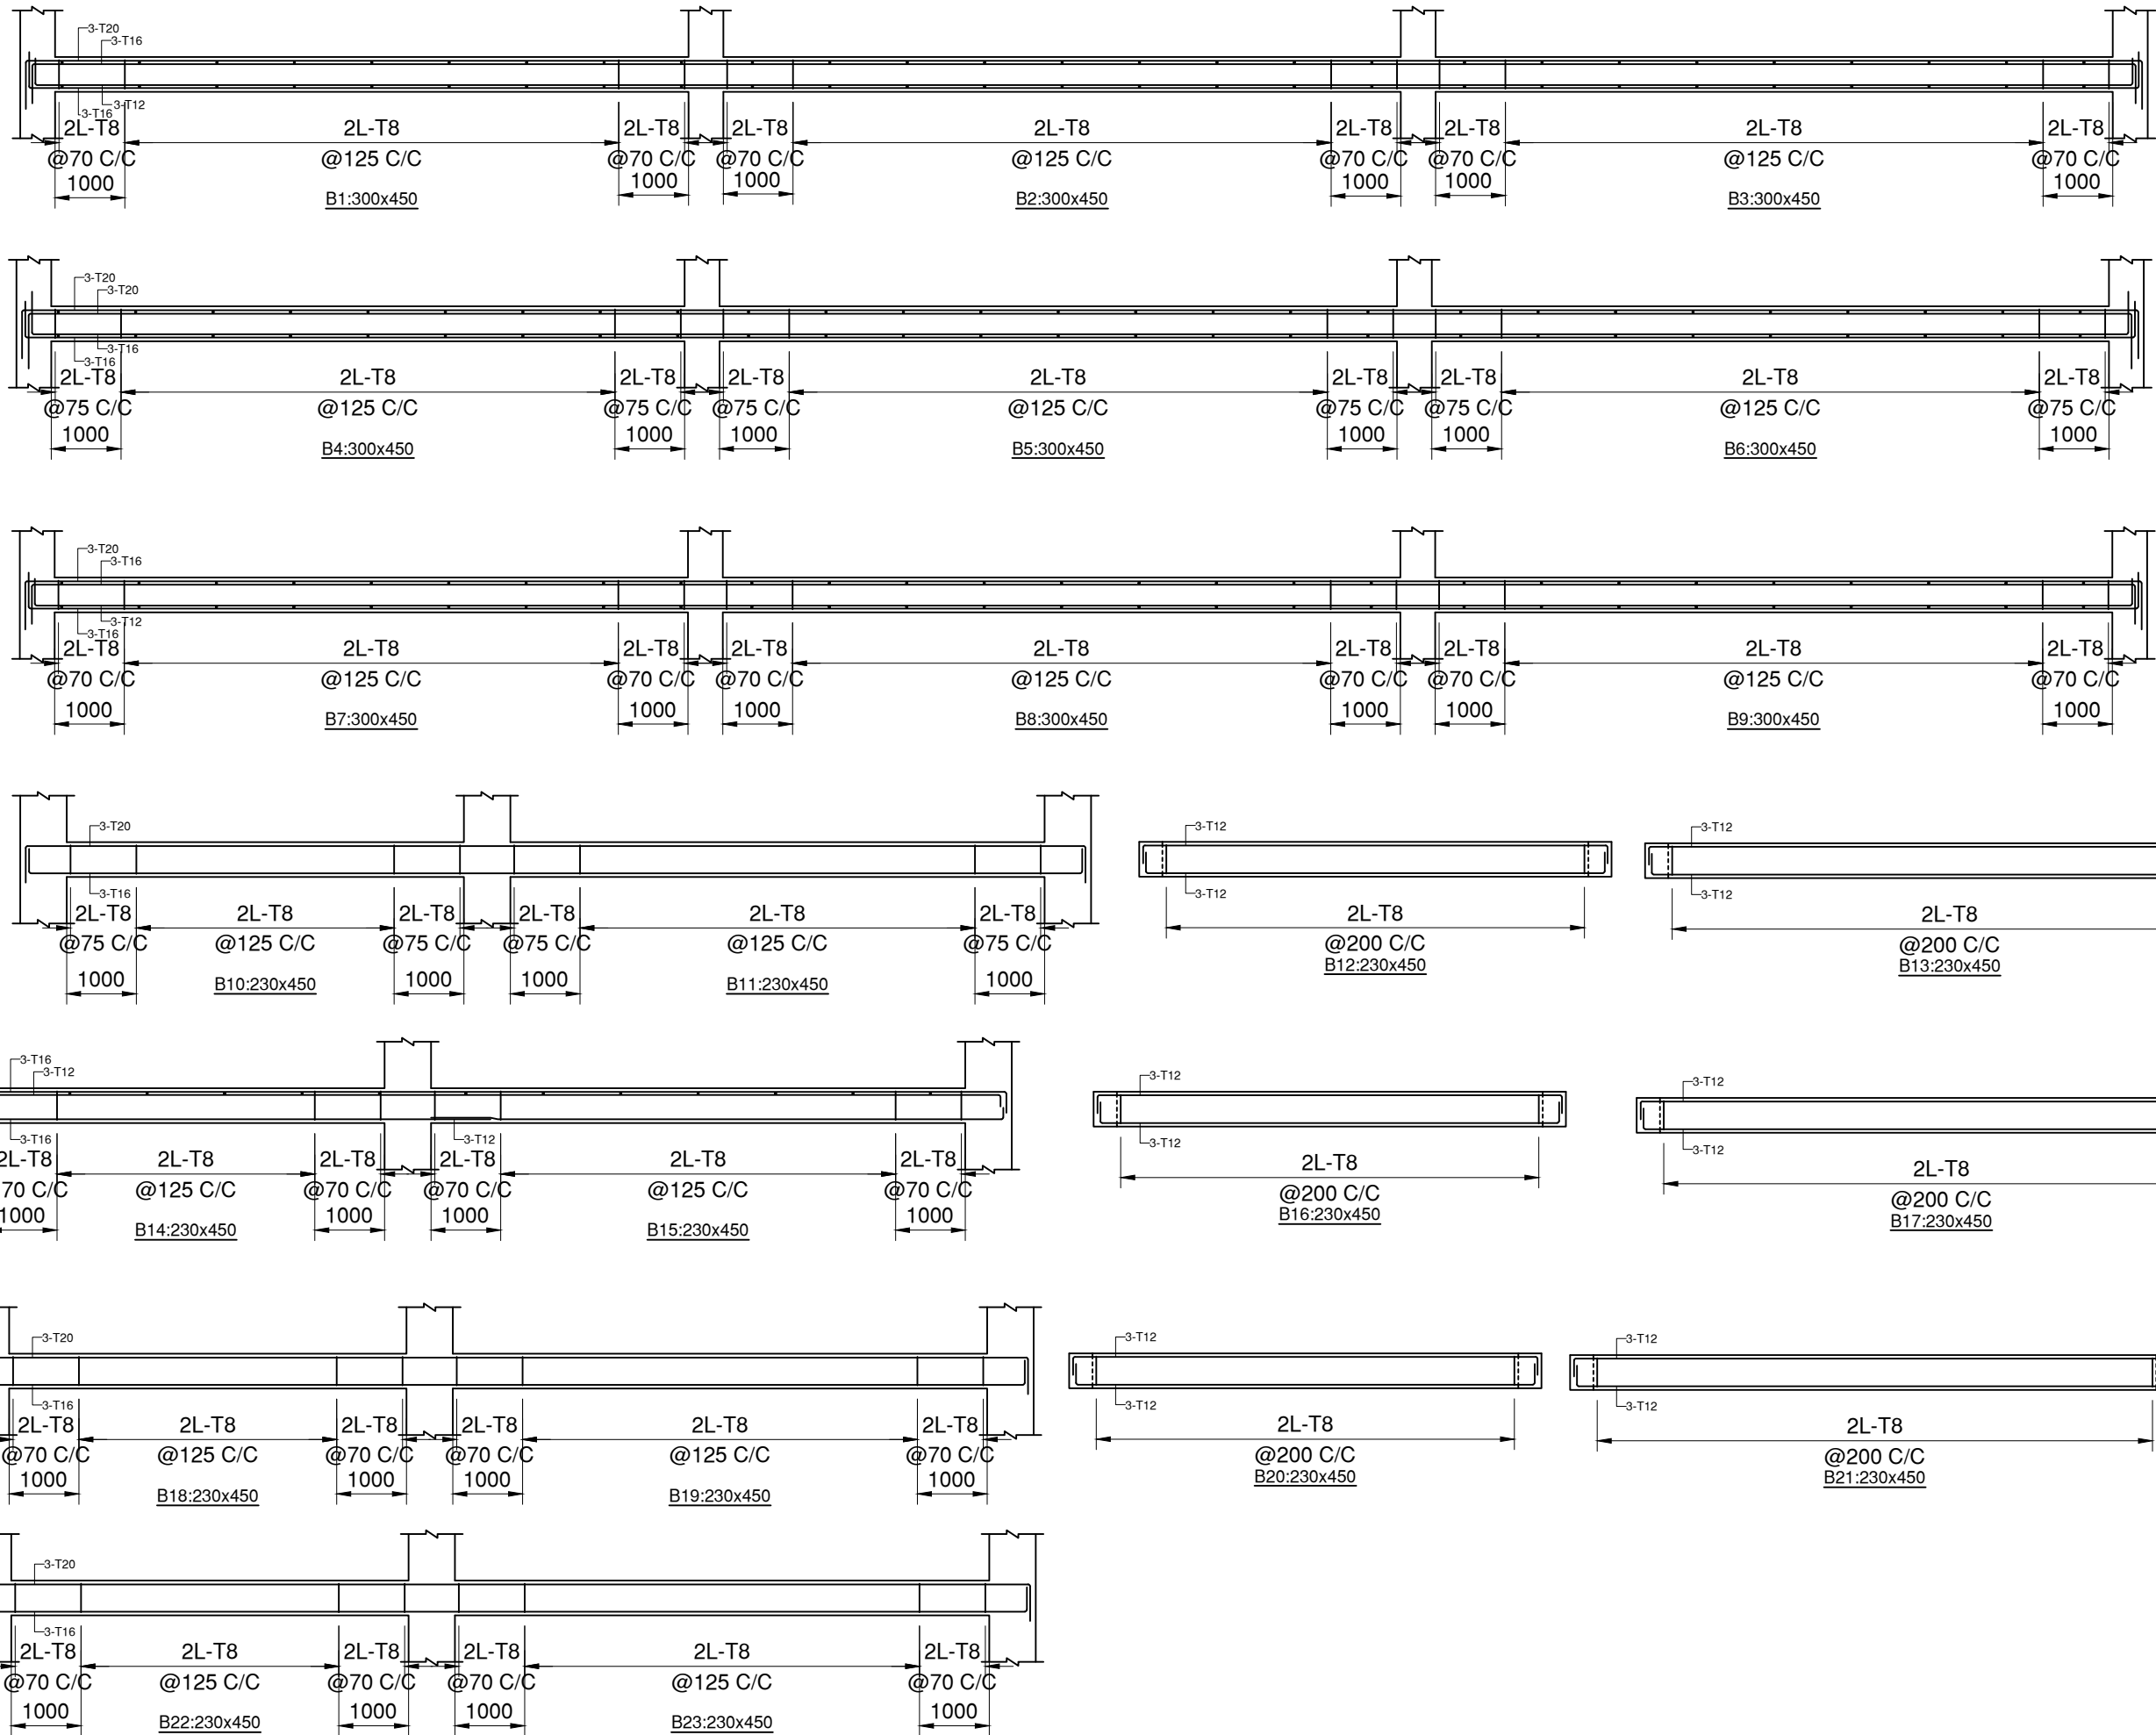

- NOTES:-
1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
 2. THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
 3. DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
 4. WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
 5. REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
 6. REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
 7. ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
 8. LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47 $\times$ d_{ie} OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
 9. CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
 10. ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
 11. CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
 12. THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
 13. PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
 14. CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13920. ALL BRICKS IN THE MASONARY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
 15. THE BUILDING HAS BEEN DESIGNED FOR GROUND STOREY. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
 16. FOR 600# RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT. SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.
 17. THE STRUCTURAL MEMBER SIZES AND REINFORCEMENT DETAILS SHOWN IN THESE DRAWINGS ARE TENTATIVE AND INTENDED FOR GENERAL GUIDANCE ONLY. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO CARRY OUT THE FINAL DESIGN, DETAILING, AND STABILITY VERIFICATION IN ACCORDANCE WITH APPLICABLE CODES AND ACTUAL SITE CONDITIONS. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ENSURING THE SAFETY, SERVICEABILITY, AND DURABILITY OF THE STRUCTURE DURING CONSTRUCTION AND THROUGHOUT ITS SERVICE LIFE. ANY DISCREPANCY OR DEVIATION SHALL BE REPORTED TO THE ENGINEER FOR REVIEW PRIOR TO EXECUTION.

TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
PROJECT	BQ WORKMEN HOUSING	
BUILDING	ELECTRICAL SUB STATION	
DRAWING TITLE	PLINTH BEAM REINFORCEMENT DETAILS	
DRG. NO.	RITES/BLD/STR/TD/ESS/148	
NORTH	SCALE	DATE
	NTS	AUGUST 2025

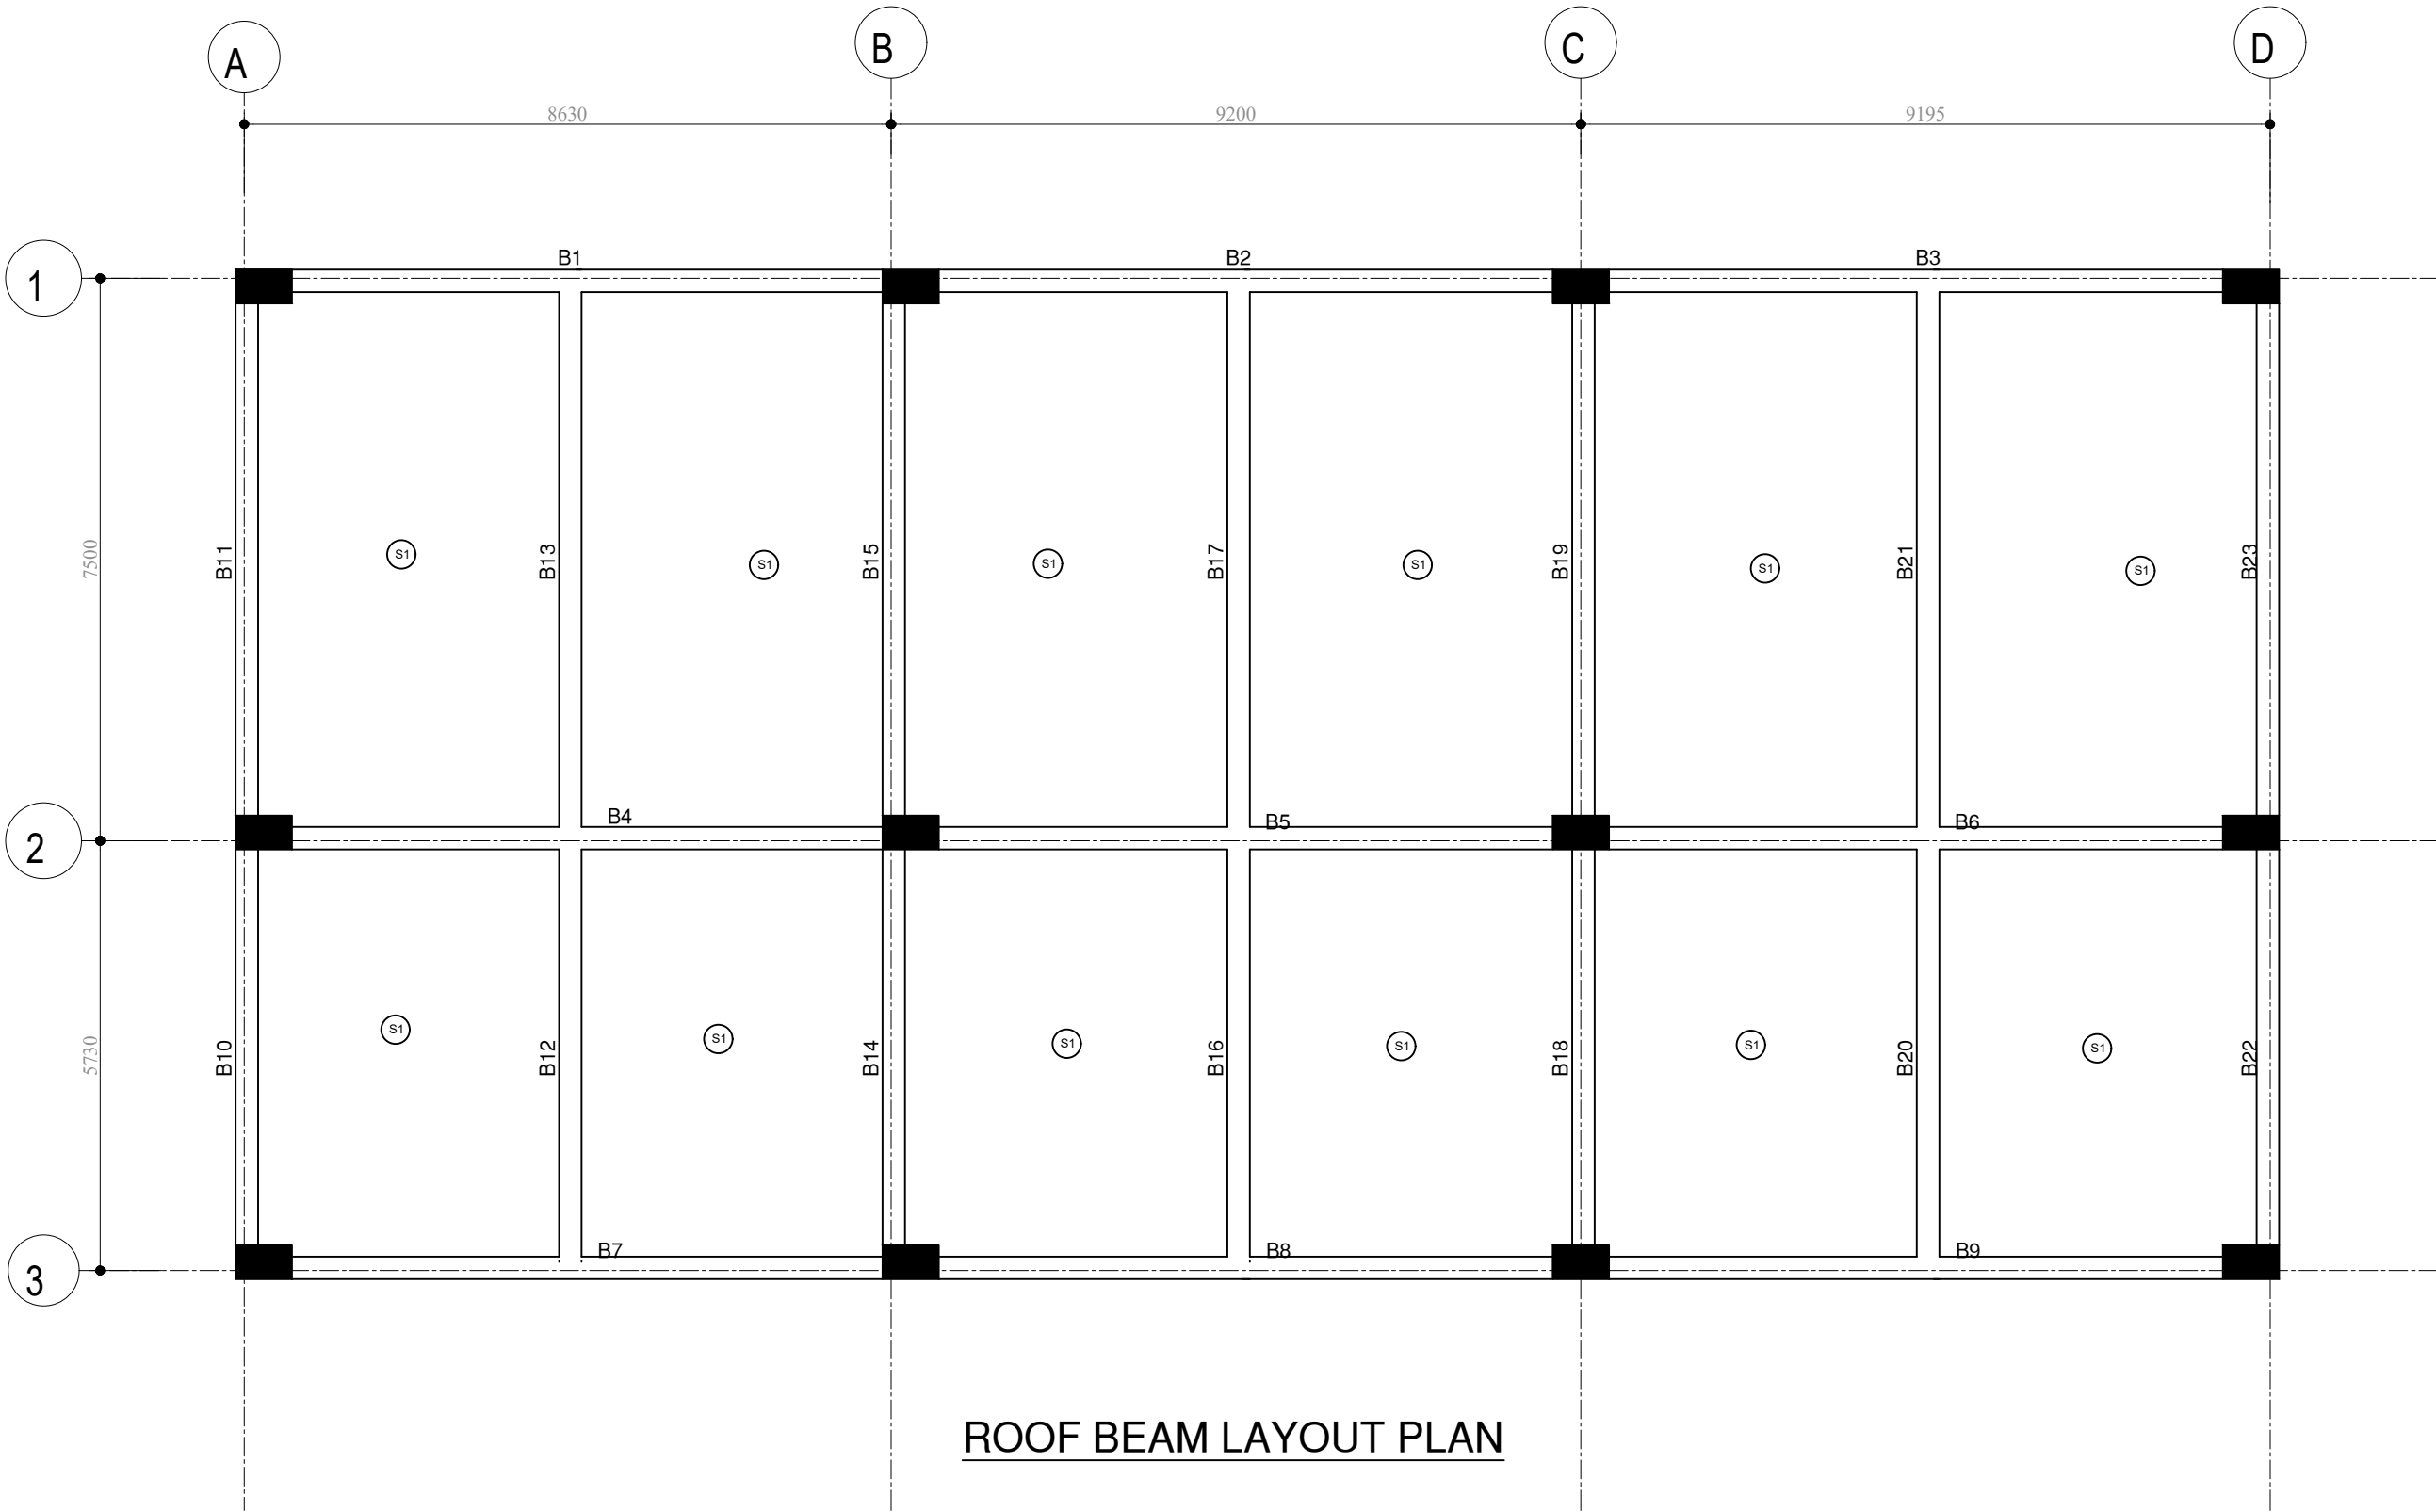

ROOF BEAM LAYOUT PLAN

ROOF SLABS SCHEDULE DETAILS

S.NO	SLAB MARK	SLAB THICK	REINFORCEMENT			
			BOTTOM THRU BARS		TOP BARS	
			ALONG SHORT SPAN	ALONG LONG SPAN.	ALONG SHORT SPAN	ALONG LONG SPAN.
1.	S1	150	8@100C/C	8@100C/C	8@100C/C	8@100C/C

- NOTES:-
- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
 - THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER ARCHITECTURAL DRAWINGS. ANY DISCREPANCY BETWEEN ARCHITECTURAL DRAWING AND STRUCTURAL DRAWING SHALL BE RECONCILED BEFORE EXECUTION. ANY DISCREPANCY NOTED SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF ARCHITECT/ENGINEER PRIOR TO EXECUTION.
 - DULY WRITTEN DIMENSIONS ARE TO BE FOLLOWED. NEITHER THE BARS SHALL BE COUNTED NOR THE DIMENSIONS SCALED FROM DRAWINGS.
 - WATER FOR CONSTRUCTION PURPOSE SHALL CONFORM TO CLAUSE 5.4 OF I.S.-456-2000.
 - REINFORCED CEMENT CONCRETE SHALL BE DESIGN MIX M30 CONFORMING TO I.S. 456-2000 SHALL BE USED.FOR ALL RCC WORK.
 - REINFORCEMENT IN SHORT SPAN SHALL BE PLACED IN BOTTOM LAYER IN SLABS.
 - ALL STEEL REINFORCEMENT SHALL BE OF Fe 550 D TYPE CONFORMING TO I.S. 1786 AND HAVING MINIMUM YIELD STRENGTH OF 550 N/SQ.MM
 - LAP LENGTH/DEVELOPMENT LENGTH FOR MAIN REINFORCEMENT BARS AS PER I.S.-456-2000 SHALL BE 47Xdia OF BAR FOR M30 GRADE OF CONCRETE, LAPS SHALL BE STAGGERED . NOT MORE THAN 50% BARS SHALL BE LAPPED AT ONE SECTION. LAPS SHALL BE AVOIDED UPTO 0.25 X L FROM SUPPORT IN BEAMS AND SLABS.
 - CLEAR COVER TO ALL MAIN REINFORCEMENT BAR SHALL BE : FOR SLAB - 25MM, COLUMNS- 50MM, BEAMS - 40MM, FOUNDATIONS - 75MM RCC WALL - 30MM.
 - ANY LOOSE POCKET/PATCH BELOW FOUNDATION SHALL BE CLEARED & FILLED WITH 1:4:8 P.C.C.
 - CONSTRUCTION JOINT SHALL BE MADE VERTICAL BY PROPER TEMPLATE WITH SLOTS FOR ACCOMMODATING REINFORCEMENT BARS. THE JOINT SHALL BE TREATED IN ACCORDANCE WITH I.S.-11817.
 - THE CONSTRUCTION JOINT SHALL BE PLANNED AND APPROVED BY THE ENGG.-IN-CHARGE & SHALL NOT BE PROVIDED IN CANTILEVER BEAM & SLAB.
 - PLINTH FILLING & BACK FILLING IN FOUNDATION TRENCHES TO BE DONE IN LAYERS AND SHOULD BE WELL COMPACTED AND SHALL BE SIMULTANEOUSLY CARRIED OUT INSIDE & OUTSIDE THE BUILDING.
 - CENTER OF FOOTING AND CENTRE OF COLUMN SHALL BE KEPT SAME. THE REINFORCEMENT DETAILING SHALL BE AS PER LATEST I.S. CODE 13820. ALL BRICKS IN THE MASONARY SHALL HAVE CHARACTERISTIC STRENGTH OF 7.5 N/SQ.MM. (UNLESS OTHERWISE SPECIFIED) LAID IN CEMENT MORTAR AS/SPECS/BOQ.
 - THE BUILDING HAS BEEN DESIGNED FOR GROUND STOREY. FUTURE EXPANSION OR ADDITIONAL FLOOR IS NOT RECOMMENDED.
 - FOR 600# RCC BORED CAST IN SITU PILES SAFE BEARING CAPACITY HAS BEEN CONSIDERED AS PER SOIL INVESTIGATION REPORT. SAME SHALL BE ENSURED AT SITE PRIOR TO EXECUTION.
 - THE STRUCTURAL MEMBER SIZES AND REINFORCEMENT DETAILS SHOWN IN THESE DRAWINGS ARE TENTATIVE AND INTENDED FOR GENERAL GUIDANCE ONLY. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO CARRY OUT THE FINAL DESIGN, DETAILING, AND STABILITY VERIFICATION IN ACCORDANCE WITH APPLICABLE CODES AND ACTUAL SITE CONDITIONS. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ENSURING THE SAFETY, SERVICEABILITY, AND DURABILITY OF THE STRUCTURE DURING CONSTRUCTION AND THROUGHOUT ITS SERVICE LIFE. ANY DISCREPANCY OR DEVIATION SHALL BE REPORTED TO THE ENGINEER FOR REVIEW PRIOR TO EXECUTION.

TENDER DRAWING

CLIENT



OIL INDIA LIMITED
(A Govt. of India Enterprise)

CONSULTANT



RITES
THE INFRASTRUCTURE PEOPLE
(A Govt. of India Enterprise)

PROJECT

BQ WORKMEN HOUSING

BUILDING

ELECTRICAL SUB STATION

DRAWING TITLE

ROOF BEAM LAYOUT AND SLAB SCHEDULE

DRG. NO.

RITES/BLD/STR/TD/ESS/149

NORTH



SCALE

NTS

DATE

AUGUST 2025

LEGEND :-

S. No.	SYMBOL	DESCRIPTION	POSITION HEIGHT
1.		6A ONE WAY SWITCH BOARD	AS PER CPWD
2.		1200 MMØ CEILING FAN	CEILING
3.		36W LED WALL MOUNTED LIGHT	AS PER CPWD
4.		12W LED WALL BRACKET LIGHT	AS PER CPWD
5.		12W LED CEILING LIGHT	AS PER CPWD
6.		10W LED MIRROR LIGHT	AS PER CPWD
7.		BELL PUSH	AS PER CPWD
8.		BELL BUZZER	AS PER CPWD
9.		5A SWITCH SOCKET OUTLET	AS PER CPWD
10.		5A EXHAUST SOCKET	AS PER CPWD
11.		EXHAUST FAN	AS PER CPWD
12.		15A SWITCH SOCKET OUTLET	AS PER CPWD
13.		25A SOCKET FOR AC	AS PER CPWD
14.		TELEPHONE POINT	AS PER CPWD
15.		TV POINT	AS PER CPWD
16.		LOOPING	AS PER CPWD
17.		5A SOCKET CHIMINI	AS PER CPWD
18.		12W LED BULK HEAD LIGHT	AS PER CPWD
19.		36 W LED SURFACE MOUNTED TUBE LIGHT	AS PER CPWD
20.		DISTRIBUTION BOARD LIGHT	AS PER CPWD
21.		SMART ENERGY METER	AS PER CPWD

NOTES:-

1. ALL DIMENSIONS ARE IN MM; UNLESS NOTED OTHERWISE.
2. WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER-IN-CHARGE.
4. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.
5. ALL ELECTRICAL WORKS SHALL BE COMPLETED AS PER CPWD SPECIFICATIONS, RELEVANT IS CODE & REGULATION OF THE ELECTRICAL AUTHORITIES ETC. AS REQUIRED.
6. LAYOUT OF UNITS IS TYPICAL FOR ALL FLOOR.
7. EPC CONTRACTOR TO SUBMIT SHOP DRAWINGS FOR APPROVAL BEFORE EXECUTION OF WORK.
8. DISCREPANCY, IF ANY SHALL BE BROUGHT TO THE NOTICE OF ENGINEER-IN-CHARGE AND CLARIFICATION OBTAINED IN WRITING PRIOR TO EXECUTION OF THE WORK.

TENDER DRAWING

REVISIONS

CLIENT



CONSULTANT



JOB TITLE

BQ WORKMEN GROUP HOUSING
COMPLEX AT DULIAJAN ASSAM.

DRAWING TITLE

BQ HOUSING BLOCK,
TYPICAL FLOOR LIGHTING &
POWER LAYOUT



SCALE


DATE

DRG. NO.

NTS

JULY 2025

RITES/BLD/EL/TEN/201

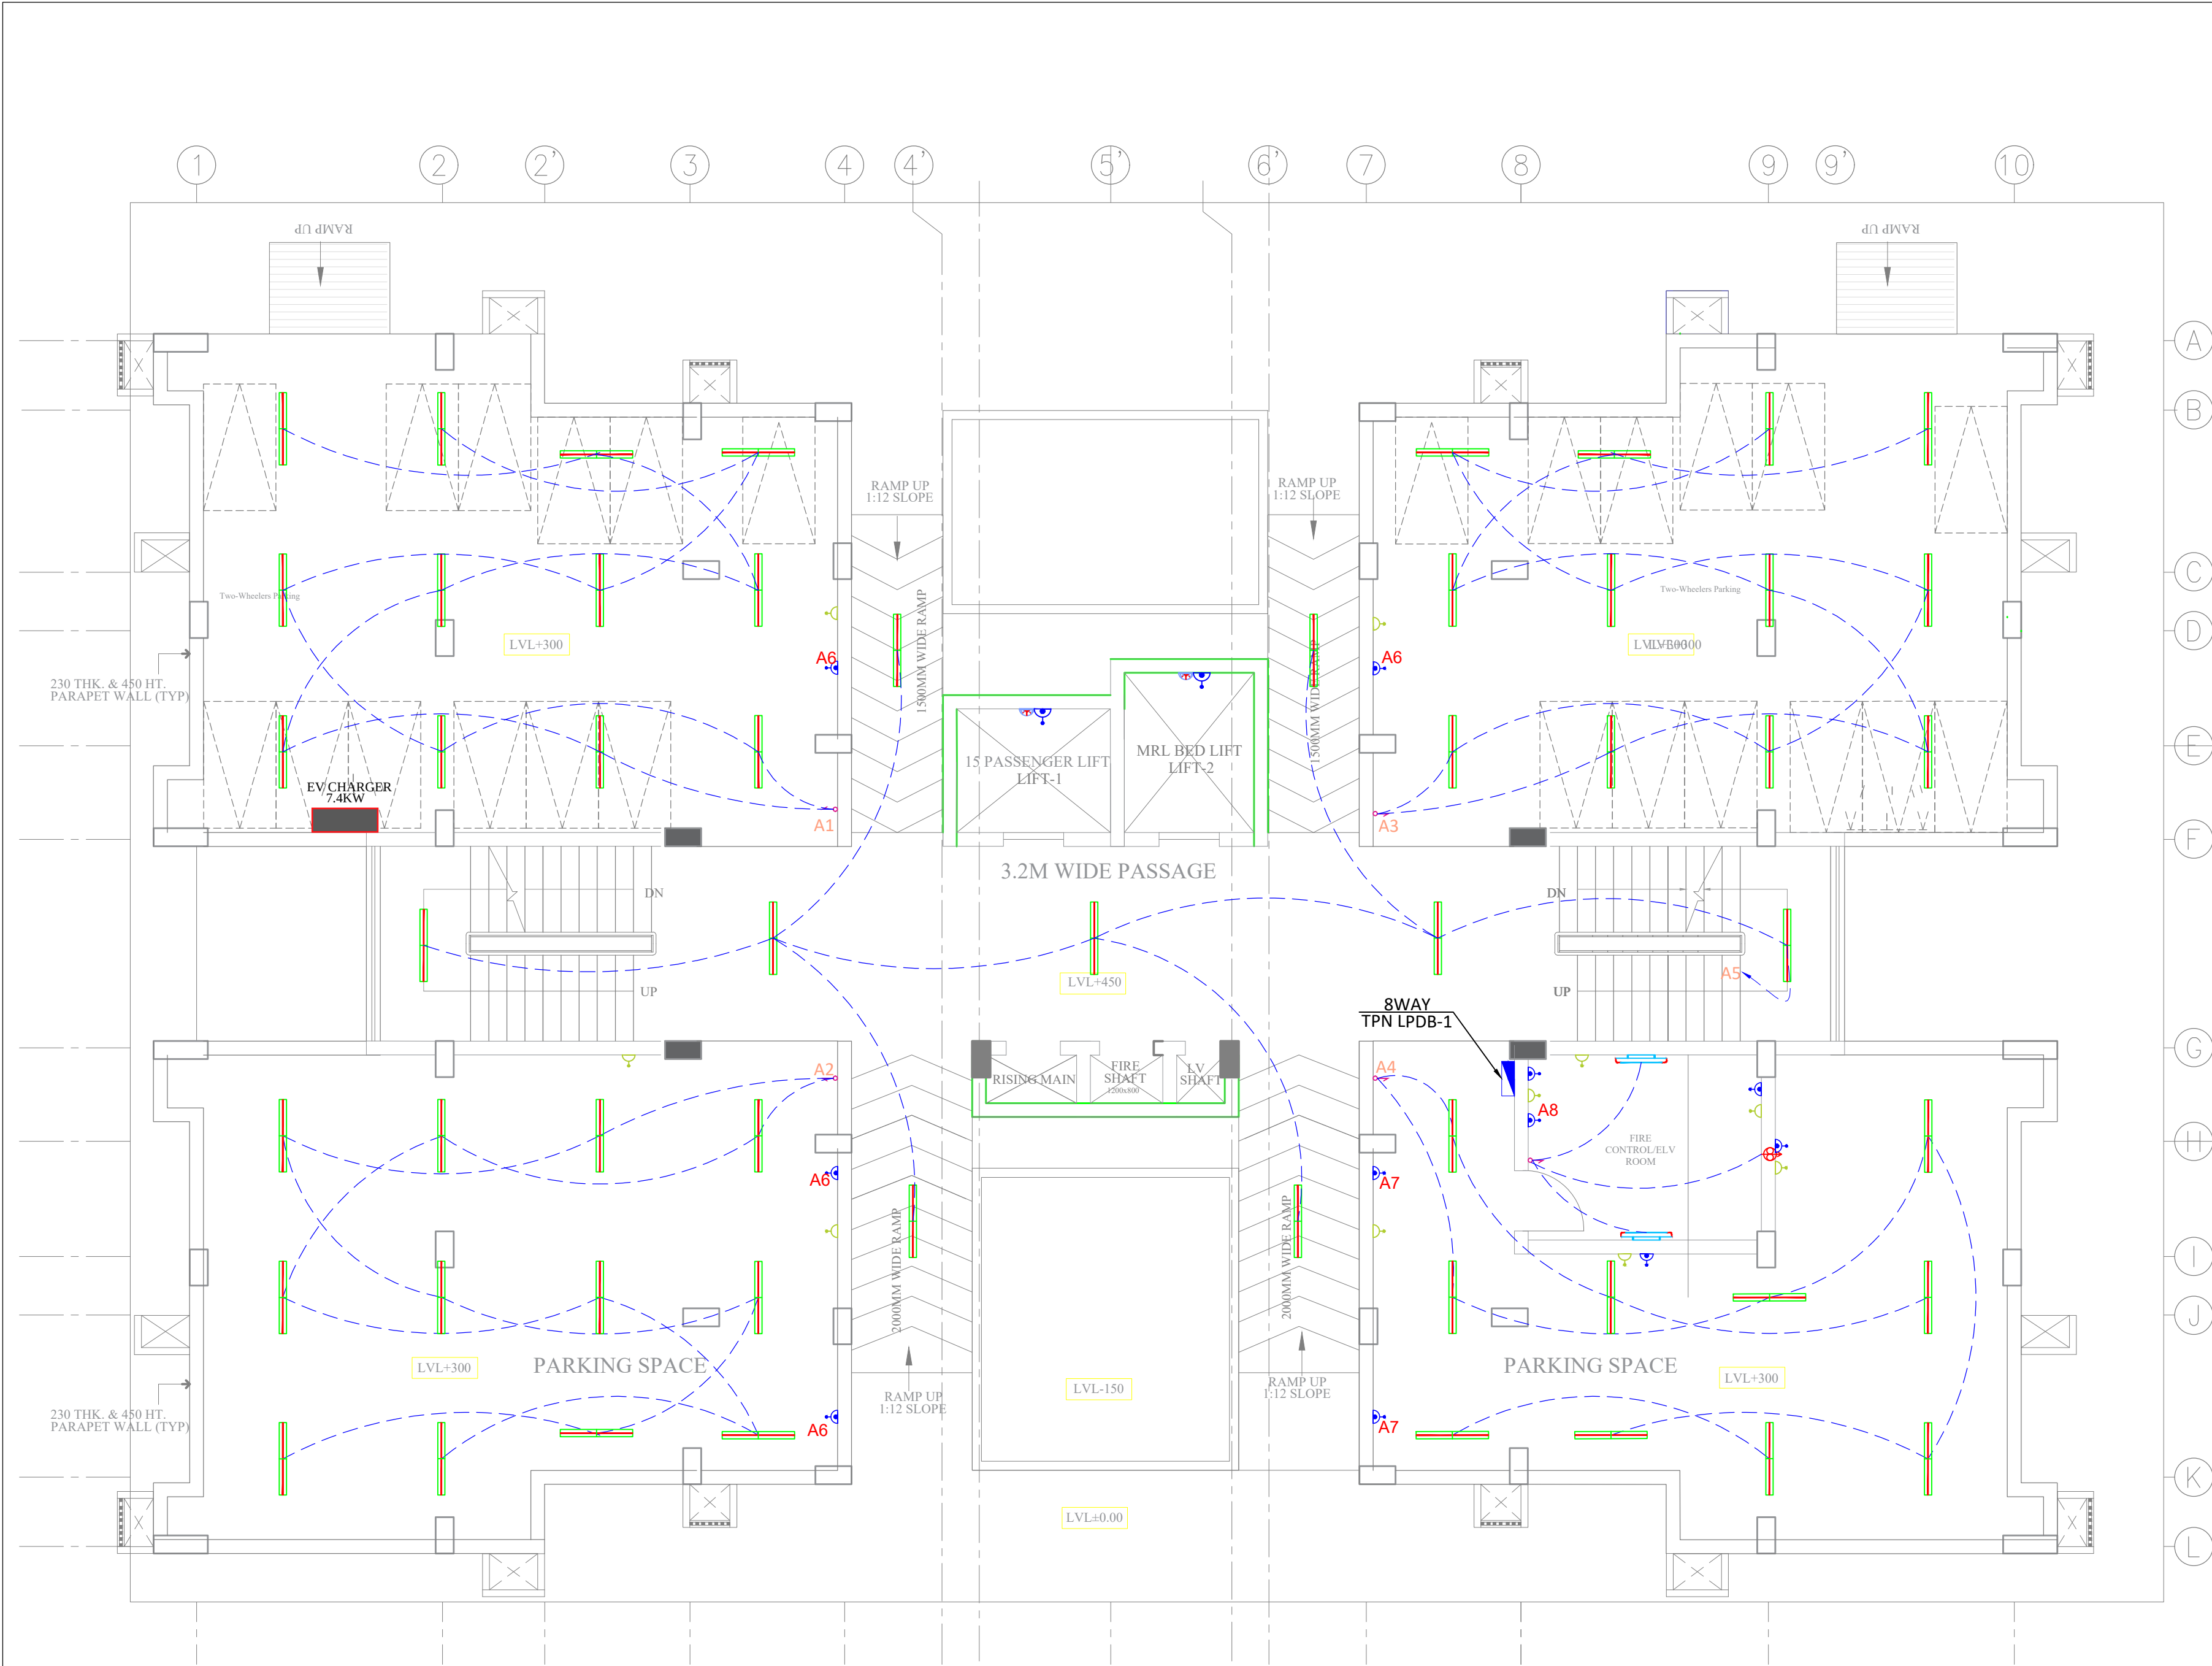

LEGEND :-			
S. No.	SYMBOL	DESCRIPTION	HEIGHT
1.		SWITCH BOARD	AS PER CPWD
2.		6A SWITCH SOCKET OUTLET	AS PER CPWD
3.		16A SWITCH SOCKET	
4.		12W BULK HEAD LIGHT	AS PER CPWD
5.		36 W LED SURFACE MOUNTED TUBE LIGHT	CEILING
6.		DISTRIBUTION BOARD LIGHT	1500
		EXHAUST FAN	AS PER CPWD

- NOTES:-
1. ALL DIMENSIONS ARE IN MM; UNLESS NOTED OTHERWISE.
 2. WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
 3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER-IN-CHARGE.
 4. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.
 5. ALL ELECTRICAL WORKS SHALL BE COMPLETED AS PER CPWD SPECIFICATIONS, ECBC-2017, RELEVANT IS CODE & REGULATION OF THE ELECTRICAL AUTHORITIES ETC. AS REQUIRED.
 6. LAYOUT OF UNITS IS TYPICAL FOR ALL FLOOR.
 7. EPC CONTRACTOR TO SUBMIT SHOP DRAWINGS FOR APPROVAL BEFORE EXECUTION OF WORK.
 8. DISCREPANCY, IF ANY SHALL BE BROUGHT TO THE NOTICE OF ENGINEER-IN-CHARGE AND CLARIFICATION OBTAINED IN WRITING PRIOR TO EXECUTION OF THE WORK.

TENDER DRAWING

CLIENT

OIL INDIA LIMITED

(A Govt. of India Enterprise)

CONSULTANT

RITES

THE INFRASTRUCTURE PEOPLE

(A Govt. of India Enterprise)


JOB TITLE

BQ WORKMEN GROUP HOUSING COMPLEX AT DULIAJAN ASSAM.

DRAWING TITLE

BQ HOUSING BLOCK, STILT FLOOR LIGHTING & POWER LAYOUT

SCALE	DATE	DRG. NO.
NTS	JULY 2025	MITES/BLD/EL/TEN/202

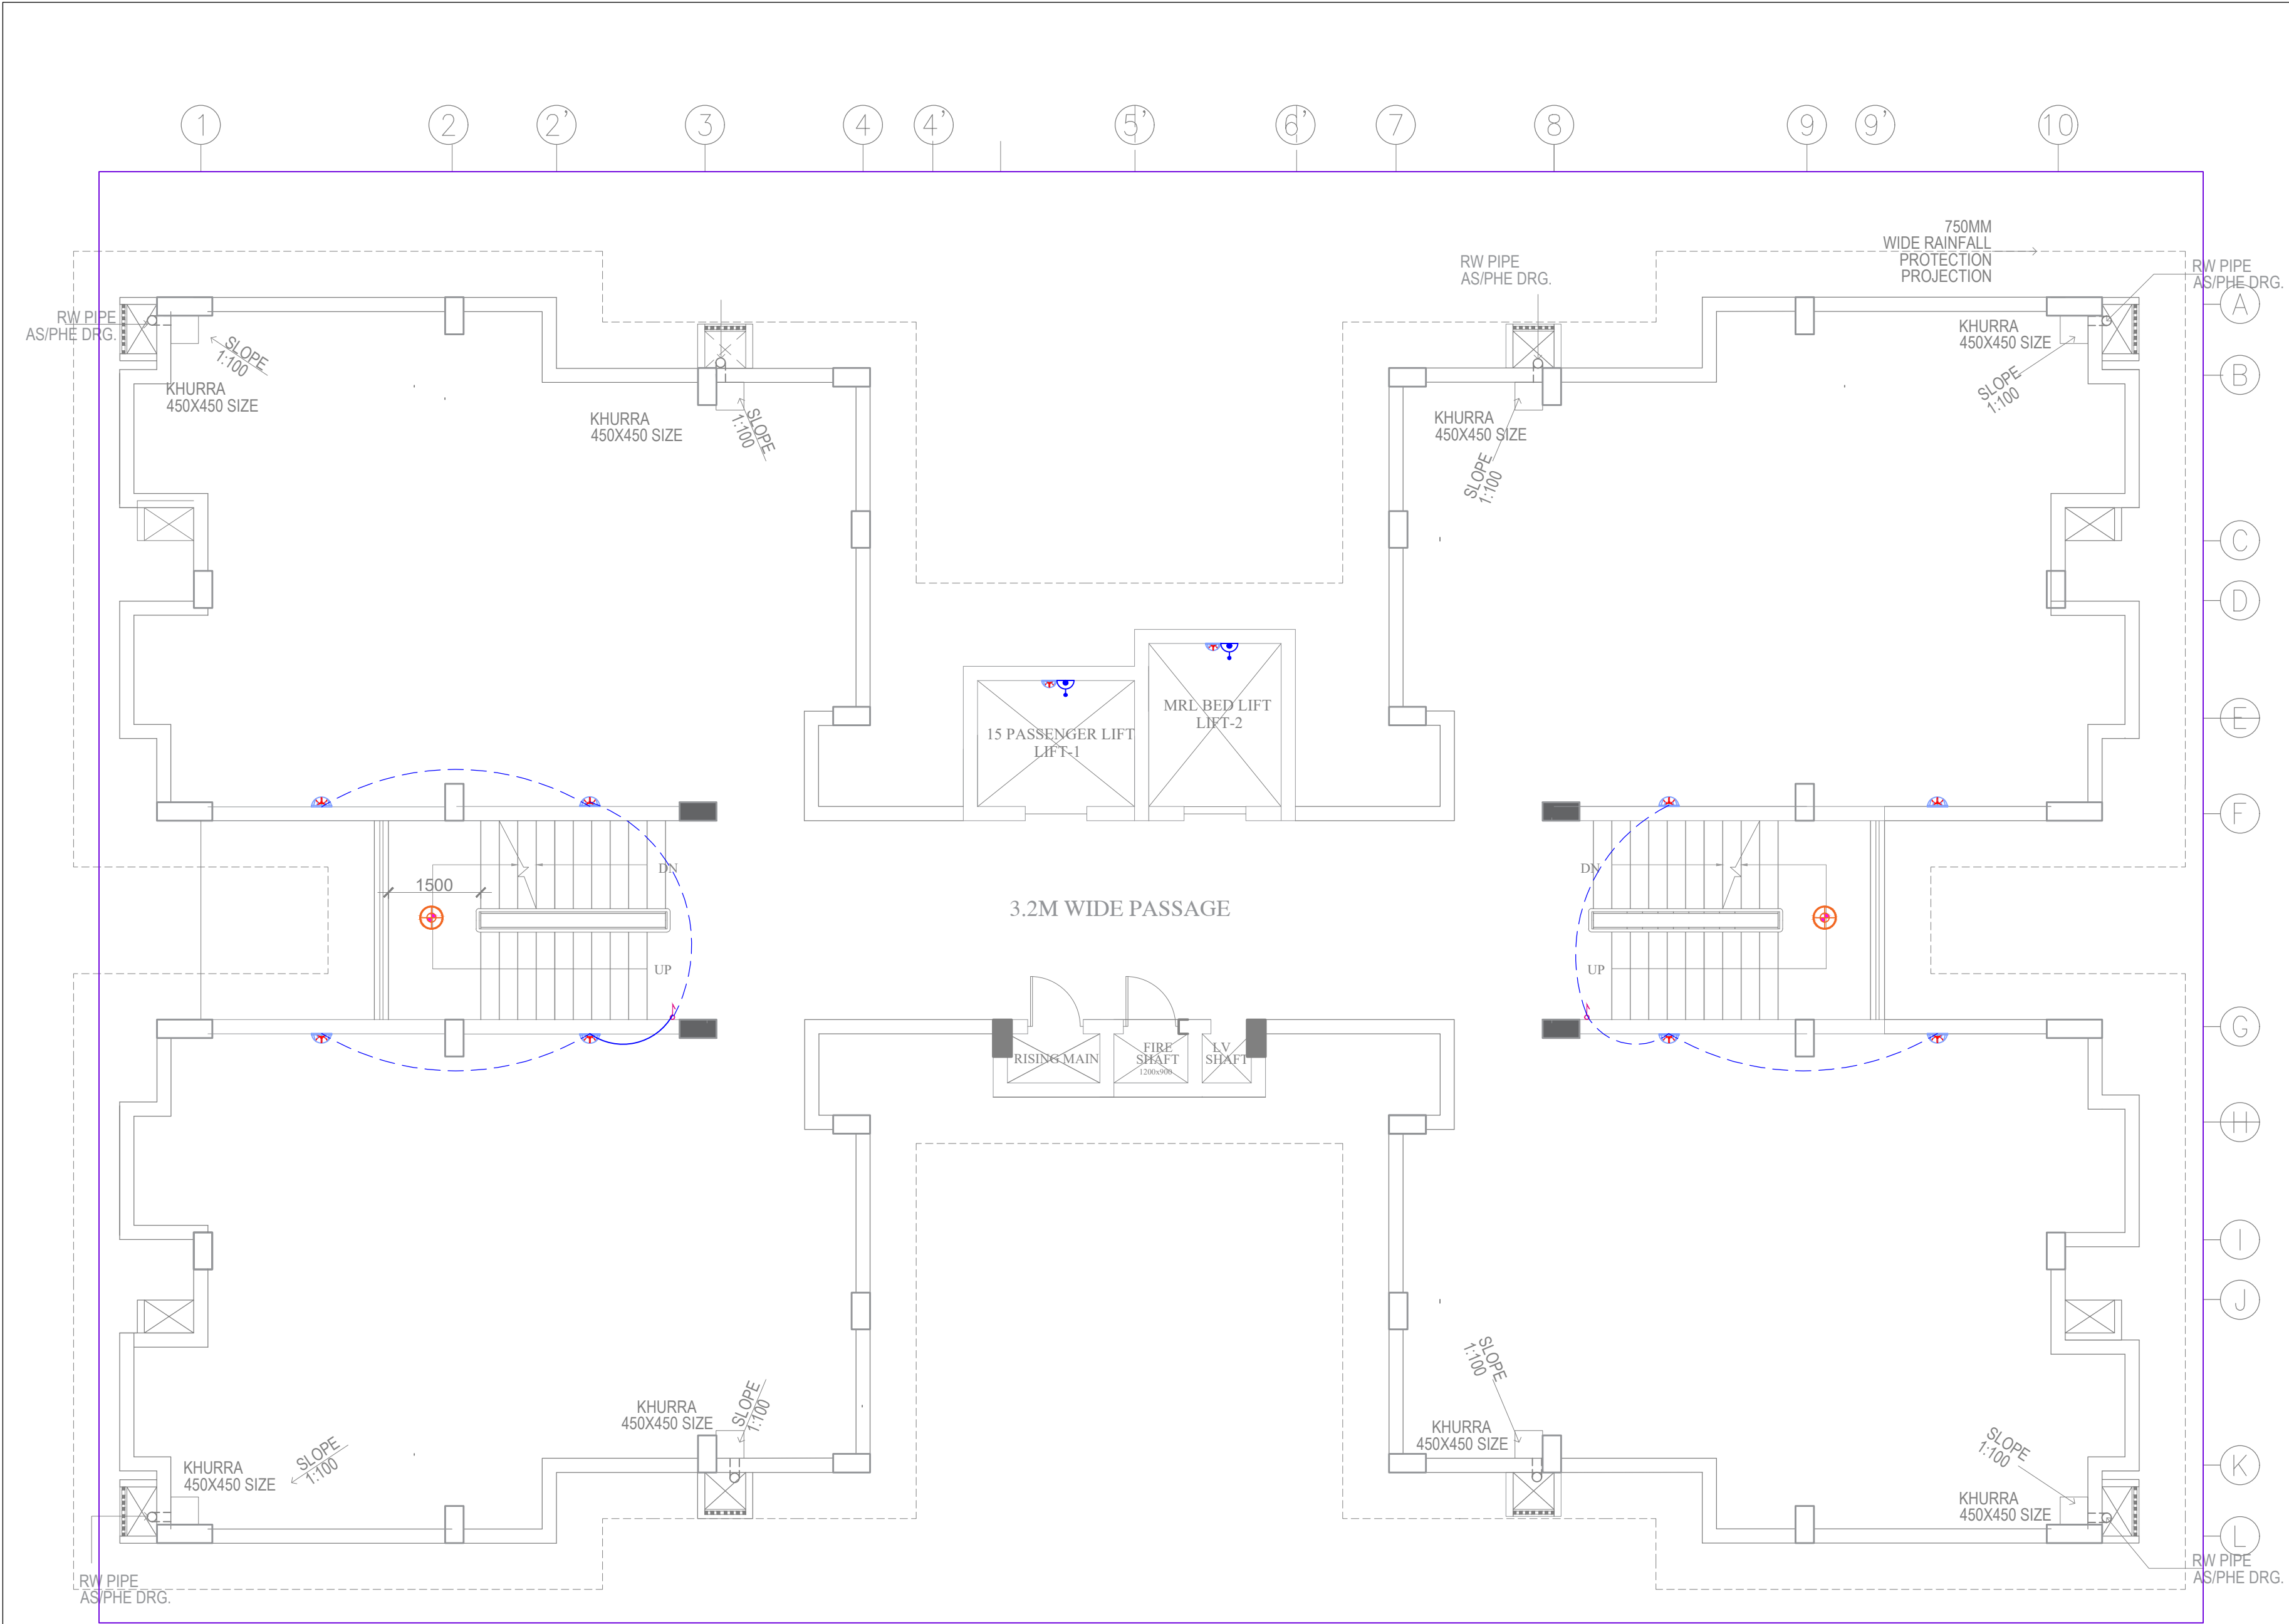

LEGEND :-			
S. No.	SYMBOL	DESCRIPTION	HEIGHT
1.		SWITCH BOARD	AS PER CPWD
2.		16A SWITCH SOCKET	AS PER CPWD
3.		LIGHT LOOPING	AS PER CPWD
4.		12W BULK HEAD LIGHT	AS PER CPWD
5.		DISTRIBUTION BOARD LIGHT	1500
6.		36 W LED SURFACE MOUNTED TUBE LIGHT	CEILING

NOTES:-	
1.	ALL DIMENSIONS ARE IN MM; UNLESS NOTED OTHERWISE.
2.	WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3.	ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER-IN-CHARGE.
4.	THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.
5.	ALL ELECTRICAL WORKS SHALL BE COMPLETED AS PER CPWD SPECIFICATIONS, RELEVANT IS CODE & REGULATION OF THE ELECTRICAL AUTHORITIES ETC. AS REQUIRED.
6.	LAYOUT OF UNITS IS TYPICAL FOR ALL FLOOR.
7.	EPC CONTRACTOR TO SUBMIT SHOP DRAWINGS FOR APPROVAL BEFORE EXECUTION OF WORK.
8.	DISCREPANCY, IF ANY SHALL BE BROUGHT TO THE NOTICE OF ENGINEER-IN-CHARGE AND CLARIFICATION OBTAINED IN WRITING PRIOR TO EXECUTION OF THE WORK.

TENDER DRAWING		
REVISIONS		
CLIENT		
OIL INDIA LIMITED (A Govt. of India Enterprise)		
CONSULTANT		
RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)		
JOB TITLE		
BQ WORKMEN GROUP HOUSING COMPLEX AT DULIAJAN ASSAM.		
DRAWING TITLE		
BQ HOUSING BLOCK, TERRACE FLOOR LIGHTING LAYOUT		
SCALE	DATE	DRG. NO.
NTS	JULY 2025	RITES/BLD/EL/TEN/203

LEGENDS:-


	DOME CAMERA
	MOUNTED SPEAKER
	PA CEILING SPEAKER
	MANUAL CALL POINT
	HOOTER
	CONTEROL MODULE
	TALK BACK JACK


NOTES:-

1. ALL DIMENSIONS ARE IN MM; UNLESS NOTED OTHERWISE.
2. WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER-IN-CHARGE.
4. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.
5. ALL ELECTRICAL WORKS SHALL BE COMPLETED AS PER CPWD SPECIFICATIONS, RELEVANT IS CODE & REGULATION OF THE ELECTRICAL AUTHORITIES ETC. AS REQUIRED.
6. LAYOUT OF UNITS IS TYPICAL FOR ALL FLOOR.
7. EPC CONTRACTOR TO SUBMIT SHOP DRAWINGS FOR APPROVAL BEFORE EXECUTION OF WORK.
8. DISCREPANCY, IF ANY SHALL BE BROUGHT TO THE NOTICE OF ENGINEER-IN-CHARGE AND CLARIFICATION OBTAINED IN WRITING PRIOR TO EXECUTION OF THE WORK.

TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
MEP CONSULTANT	PKV CONSULTING ENGINEERS (P) LTD.  815 - C DDA FLATS EAST OF LONI ROAD DELHI - 110093 email:-info@pkv.co.in	
JOB TITLE	BQ WORKMEN GROUP HOUSING COMPLEX AT DULIAJAN ASSAM.	
DRAWING TITLE	BQ HOUSING BLOCK, TYPICAL FLOOR CCTV & PA SYSTEM LAYOUT	
SCALE	DATE	DRG. NO.
NTS	JULY 2025	RITES/BLD/EL/TEN/204

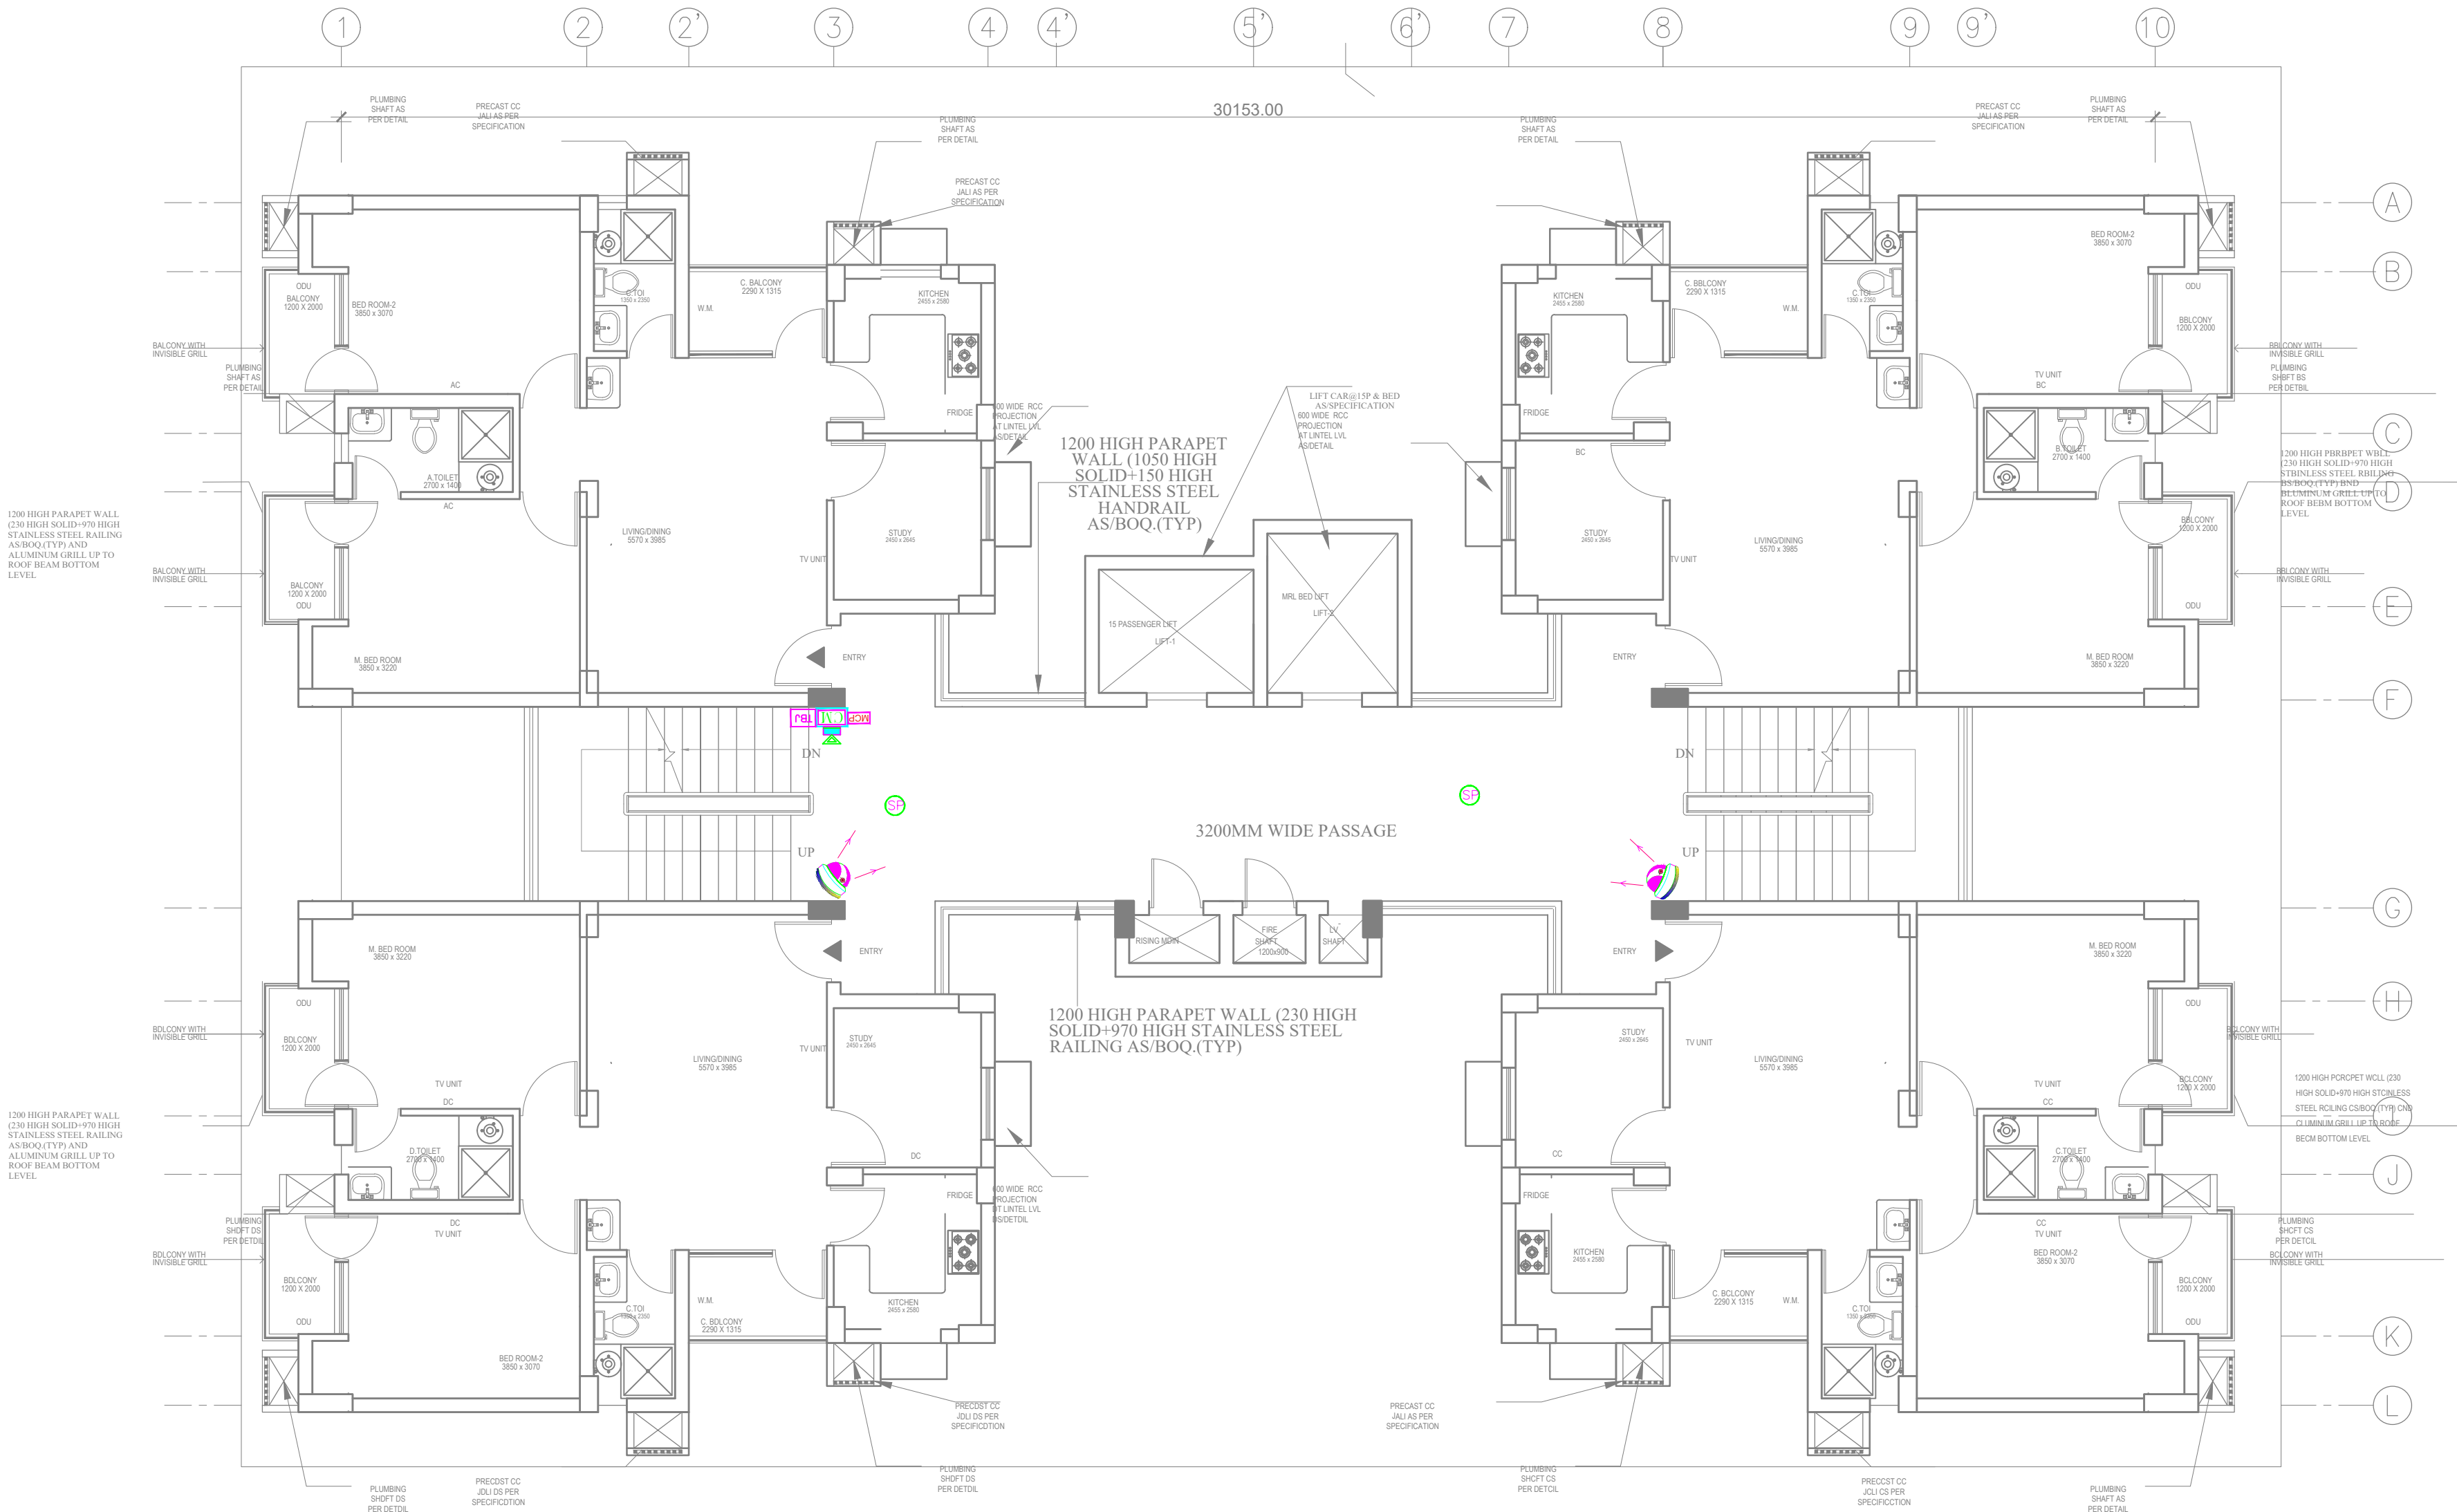

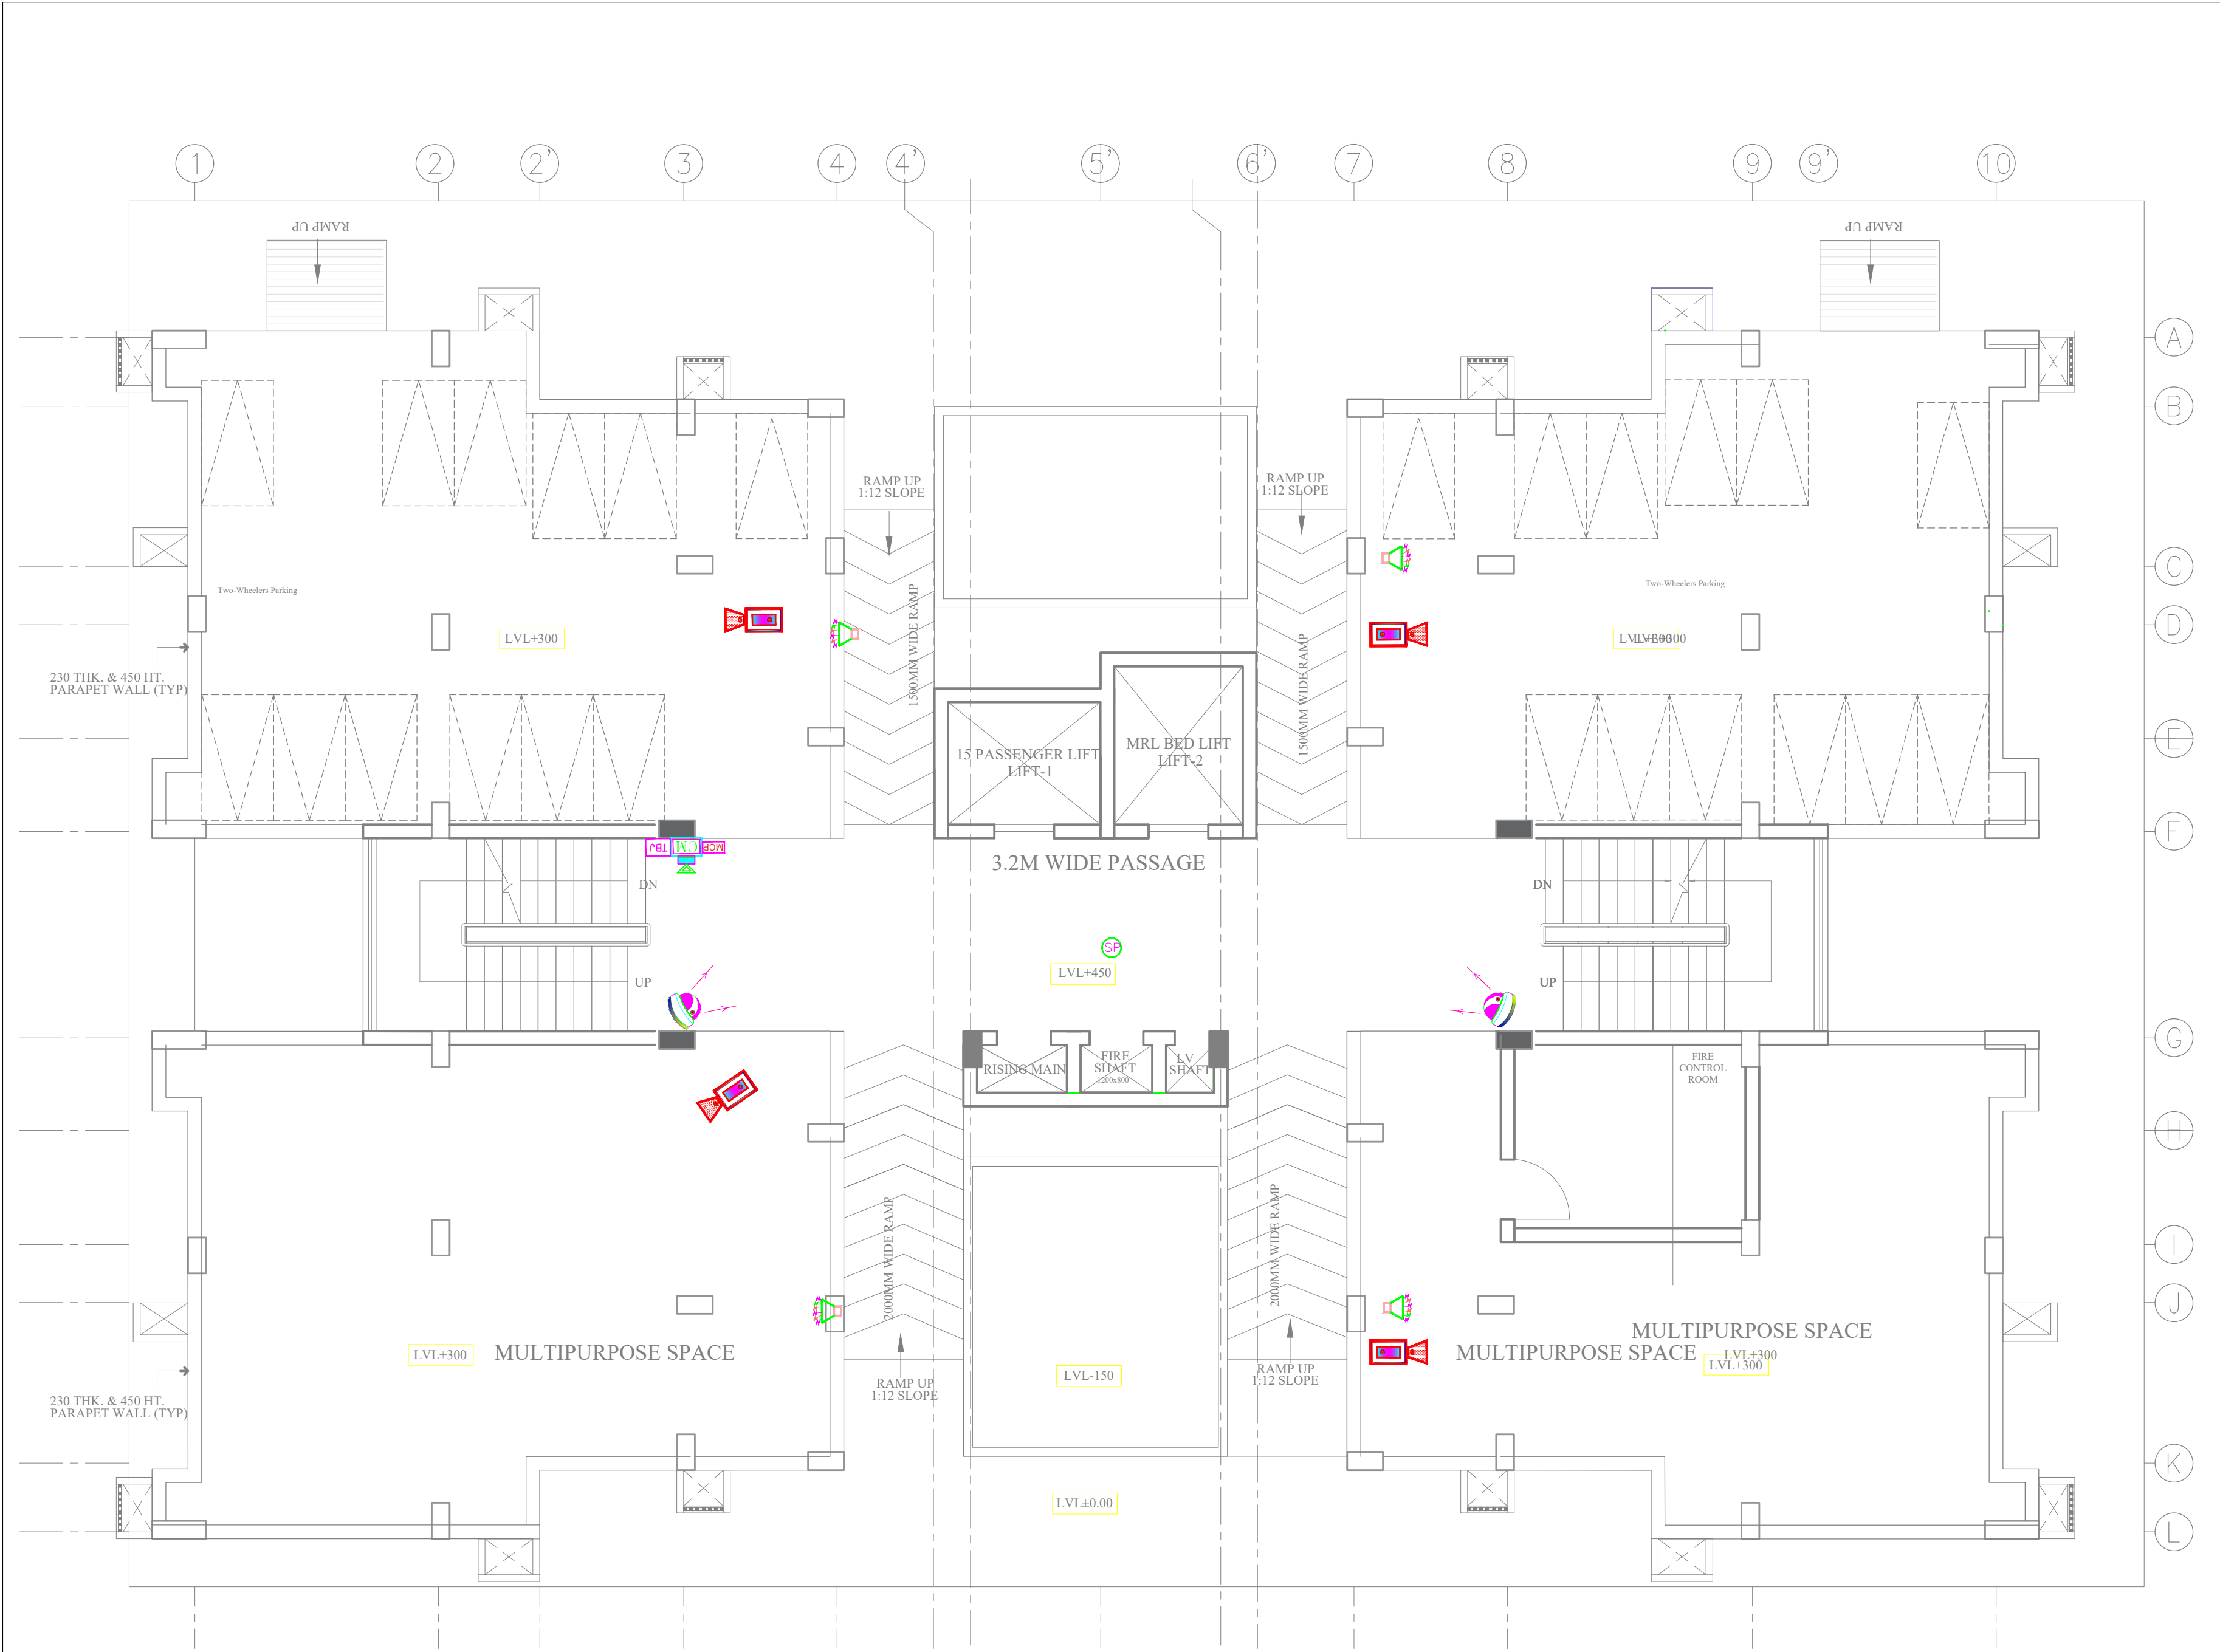

LEGENDS:-

	DATA OUTLET
	VOICE OUTLET
	DOME CAMERA
	BULLET CAMERA
	MOUNTED SPEAKER
	PA CEILING SPEAKER
	MANUAL CALL POINT
	HOOTER
	CONTEROL MODULE
	TALK BACK JACK

NOTES:-

- ALL DIMENSIONS ARE IN MM; UNLESS NOTED OTHERWISE.
- WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
- ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER-IN-CHARGE.
- THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.
- ALL ELECTRICAL WORKS SHALL BE COMPLETED AS PER CPWD SPECIFICATIONS, RELEVANT IS CODE & REGULATION OF THE ELECTRICAL AUTHORITIES ETC. AS REQUIRED.
- LAYOUT OF UNITS IS TYPICAL FOR ALL FLOOR.
- EPC CONTRACTOR TO SUBMIT SHOP DRAWINGS FOR APPROVAL BEFORE EXECUTION OF WORK.
- DISCREPANCY, IF ANY SHALL BE BROUGHT TO THE NOTICE OF ENGINEER-IN-CHARGE AND CLARIFICATION OBTAINED IN WRITING PRIOR TO EXECUTION OF THE WORK.

TENDER DRAWING


CLIENT		
OIL INDIA LIMITED (A Govt. of India Enterprise)		
CONSULTANT		
IRITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)		
MEP CONSULTANT		
PKV CONSULTING ENGINEERS (P) LTD. 815 - C DDA FLATS EAST OF LONI ROAD DELHI - 110093 email: -info@pkv.co.in		
JOB TITLE		
BQ WORKMEN GROUP HOUSING COMPLEX AT DULIAJAN ASSAM.		
DRAWING TITLE		
BQ HOUSING BLOCK, STILT FLOOR CCTV & PA SYSTEM LAYOUT		
SCALE	DATE	DRG. NO.
NTS	JULY 2025	IRITES/BLD/EL/TEN/205

GA DRAWINGS SHALL BE GOT APPROVED BEFORE FABRICATION. THE PANEL HAS TO BE SPECIFICALLY FABRICATED AS PER THE SPACE AVAILABLE AT PANEL ROOM. THE EXISTING COLUMN POSITIONS WILL ALSO BE CONSIDERED.

NOTE :-

FOR MAIN LT PANELS

- 1) All ACB shall have $I_{cs} = I_{cu} = I_{cw} = 50/65 \text{ KA}$ for 1 sec, fully rated at 50 temperature.
- 2) All ACB's shall have an inherent fault capacity of O/C, S/C, Instantaneous S/C & Earth fault protection.
- 3) All ACB's shall have Auxiliary switches with ENO + 6 McN contacts.
- 4) All Incoming ACB's shall facility with LCD / LED display for event history & measurement of current parameters.
- 5) All MCB shall be microprocessor based with built in O/L & S/C release with E/F protection.
- 6) All MCB's shall be less than 100% I_{cu} .
- 7) All MCB's shall have adjustable O/L & S/C trip setting as per load requirement.
- 8) All the indications & metering shall be done through 110/220 Volts from secondary of PT's. No indication lamps & V metering should not be operated at 415 Volts.

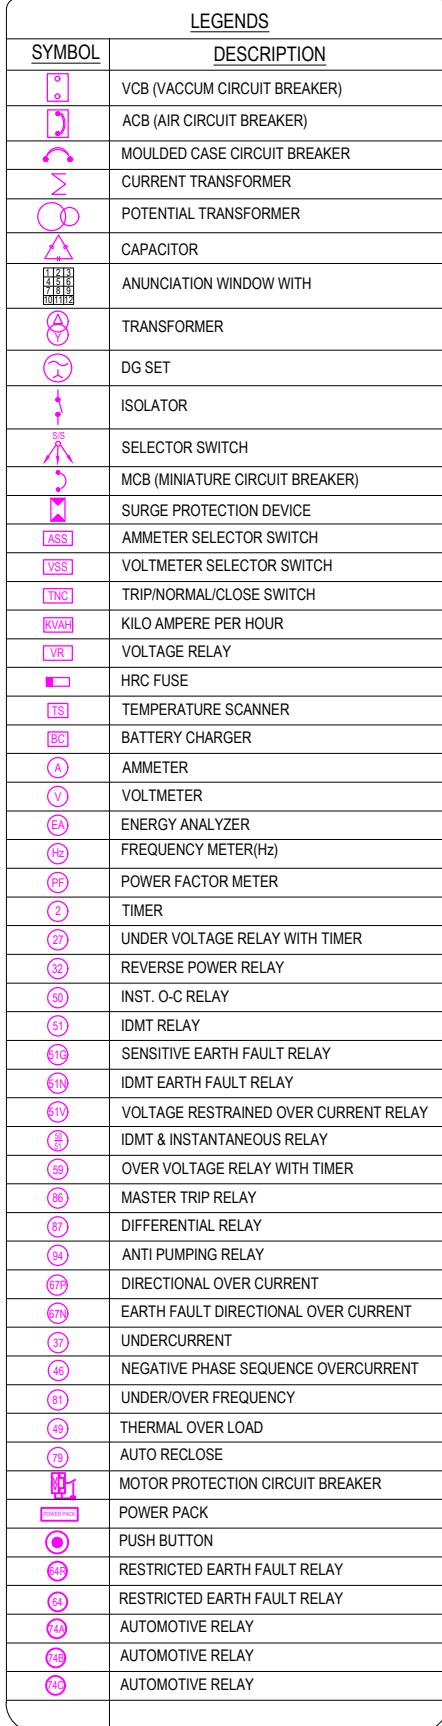

NOTES:—

1. ALL DIMENSIONS ARE IN MM; UNLESS NOTED OTHERWISE.
2. WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER-IN-CHARGE.
4. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.
5. ALL ELECTRICAL WORKINGS SHALL BE COMPLETED AS PER CPWD SPECIFICATIONS, IS CODE & REGULATION OF THE ELECTRICAL AUTHORITIES ETC. AS REQUIRED.
6. LAYOUT OF UNITS IS TYPICAL FOR ALL FLOOR.
7. EPC CONTRACTOR TO SUBMIT SHOP DRAWINGS FOR APPROVAL BEFORE EXECUTION OF WORK.
8. DISCREPANCY, IF ANY SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER-IN-CHARGE AND CLARIFICATION OBTAINED IN WRITING PRIOR TO EXECUTION OF THE WORK.

TENDER DRAWING


CLIENT	 OIL INDIA LIMITED <i>(A Govt. of India Enterprise)</i>
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE <i>(A Govt. of India Enterprise)</i>
MEP CONSULTANT	PKV CONSULTING ENGINEERS (P) LTD.  815 - C DDA FLATS EAST OF LONI ROAD DELHI - 110093 email:-info@pkv.co.in



JOB TITLE

BQ WORKMEN GROUP HOUSING
COMPLEX AT DULIAJAN ASSAM.

DRAWING TITLE	
SINGLE LINE DIAGRAM (SLD) OF ELECTRICAL WORK	

SCALE	DATE	DRG. NO.
NTS	JULY 2025	MITES/BLD/EL/TEN/206

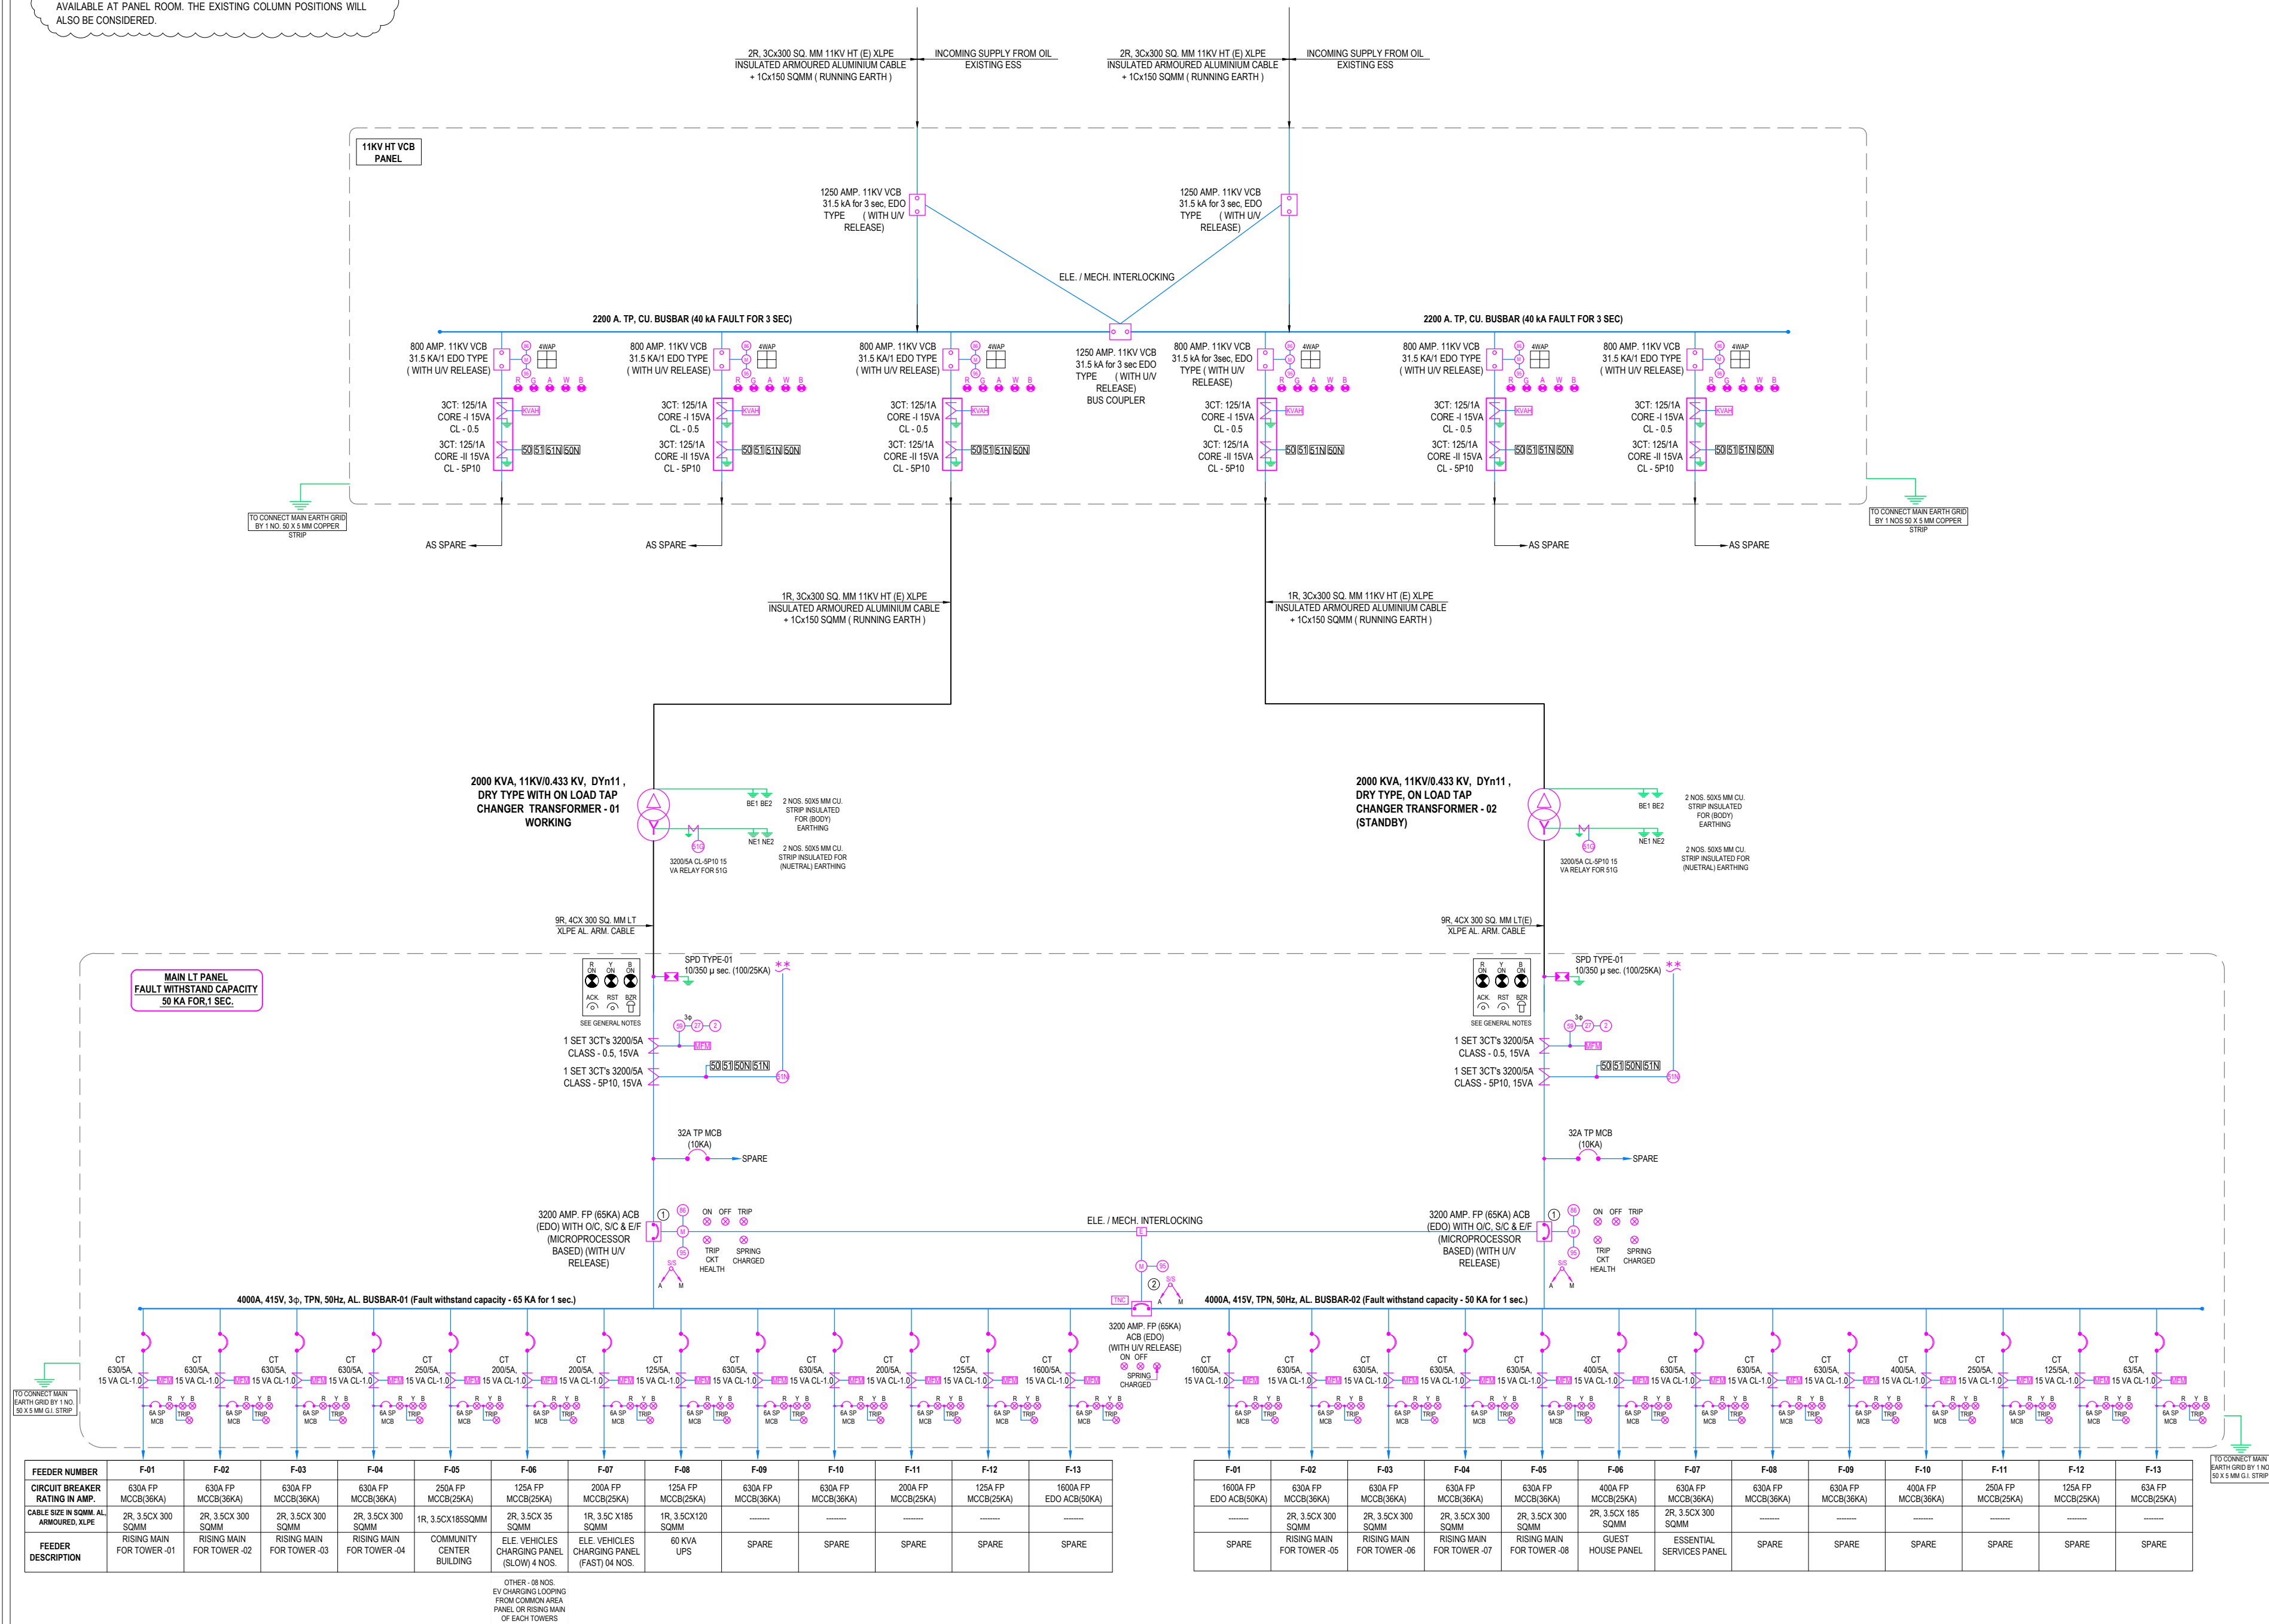

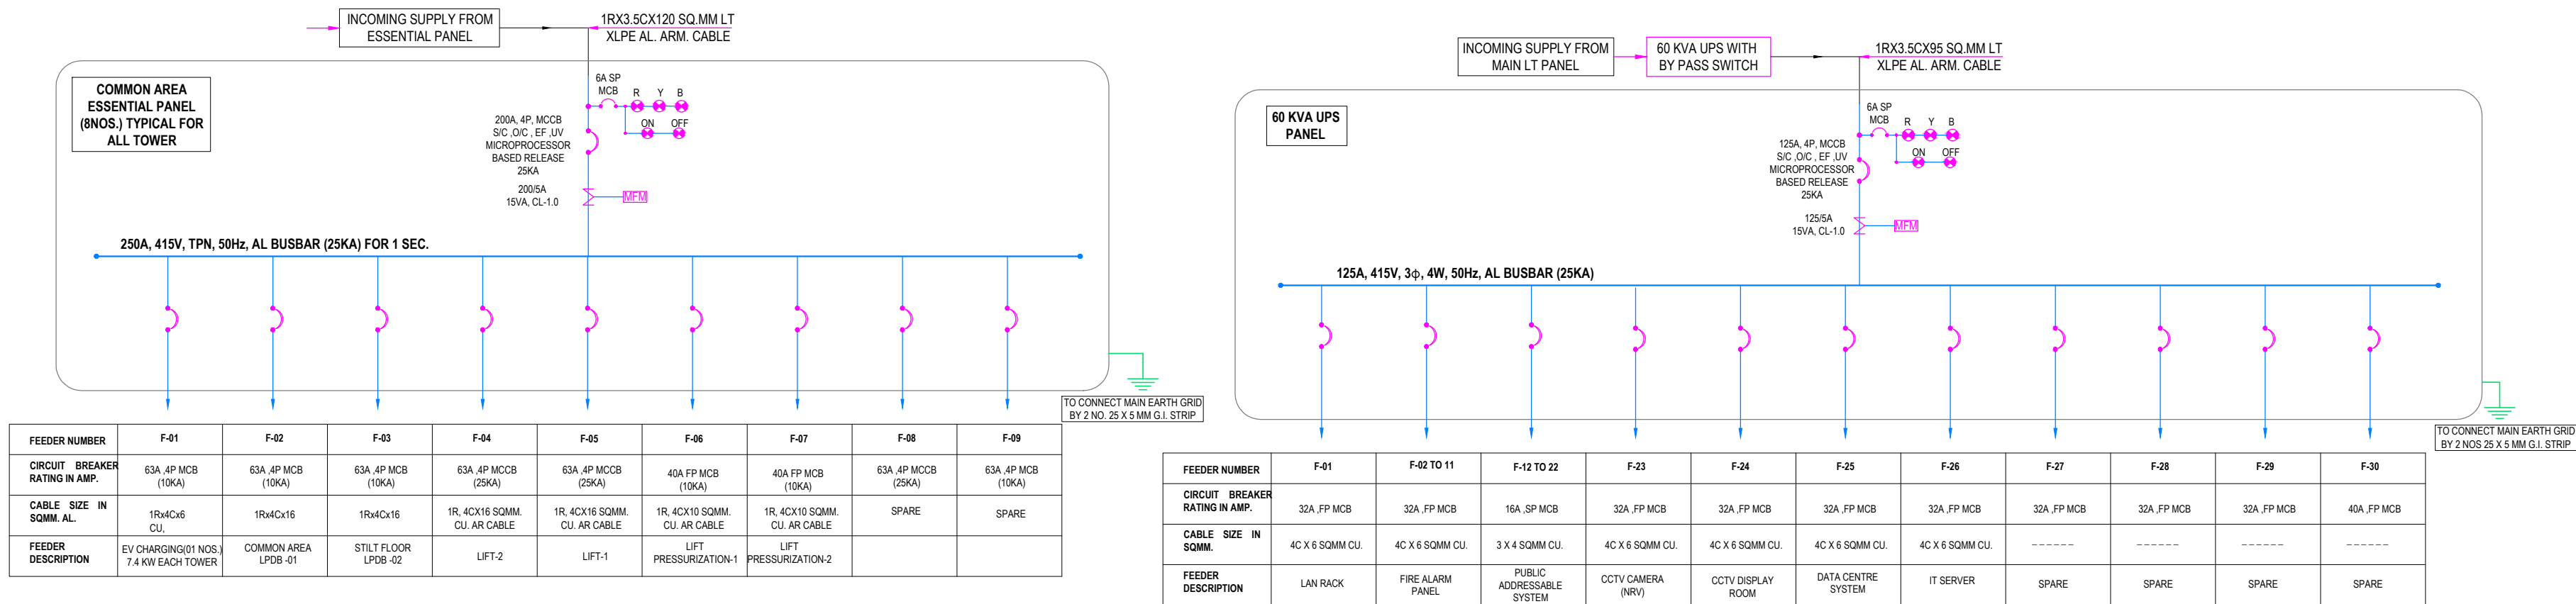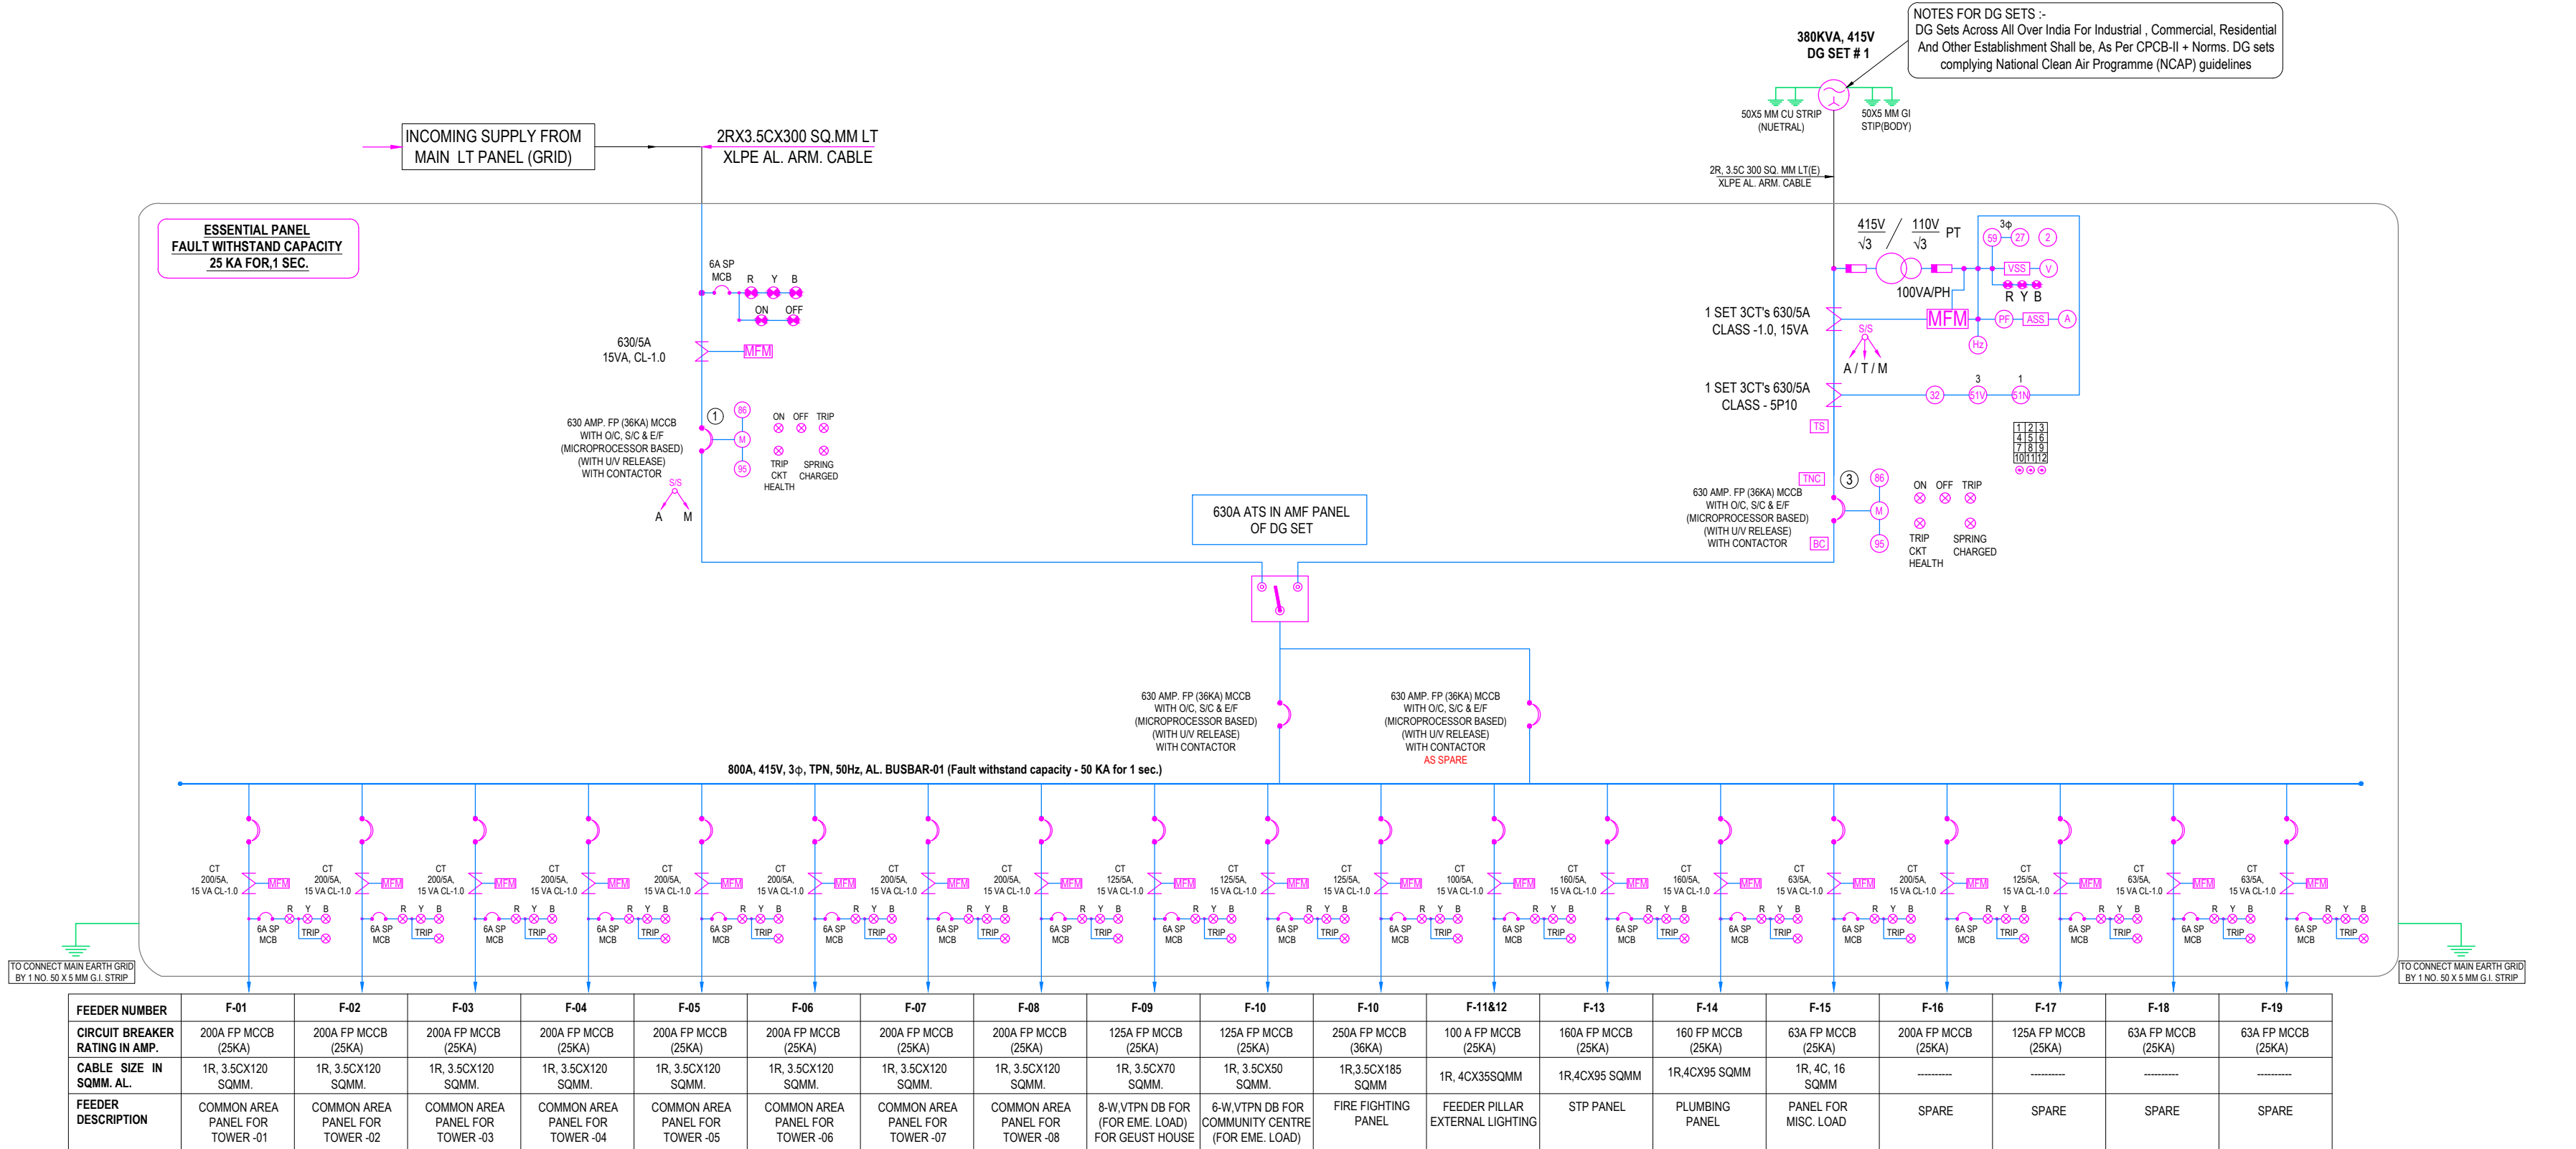

NOTES FOR DG SETS :-
DG Sets Across All Over India For Industrial, Commercial, Residential And Other Establishment Shall be, As Per CPCB-II + Norms. DG sets complying National Clean Air Programme (NCAP) guidelines


LEGENDS	
SYMBOL	DESCRIPTION
	VCB (VACUUM CIRCUIT BREAKER)
	ACB (AIR CIRCUIT BREAKER)
	MOULDED CASE CIRCUIT BREAKER
	CURRENT TRANSFORMER
	POTENTIAL TRANSFORMER
	CAPACITOR
	ANNUNCIATION WINDOW WITH
	TRANSFORMER
	DG SET
	ISOLATOR
	SELECTOR SWITCH
	MCB (MINIATURE CIRCUIT BREAKER)
	SURGE PROTECTION DEVICE
	AMMETER SELECTOR SWITCH
	VOLTMETER SELECTOR SWITCH
	TRIP/NORMAL/CLOSE SWITCH
	KILO AMPERE PER HOUR
	VOLTAGE RELAY
	HRC FUSE
	TEMPERATURE SCANNER
	BATTERY CHARGER
	AMMETER
	VOLTMETER
	ENERGY ANALYZER
	FREQUENCY METER(Hz)
	POWER FACTOR METER
	TIMER
	UNDER VOLTAGE RELAY WITH TIMER
	REVERSE POWER RELAY
	INST. O-C RELAY
	IDMT RELAY
	SENSITIVE EARTH FAULT RELAY
	IDMT EARTH FAULT RELAY
	VOLTAGE RESTRAINED OVER CURRENT RELAY
	IDMT & INSTANTANEOUS RELAY
	OVER VOLTAGE RELAY WITH TIMER
	MASTER TRIP RELAY
	DIFFERENTIAL RELAY
	ANTI PUMPING RELAY
	DIRECTIONAL OVER CURRENT
	EARTH FAULT DIRECTIONAL OVER CURRENT
	UNDERCURRENT
	NEGATIVE PHASE SEQUENCE OVERCURRENT
	UNDER/OVER FREQUENCY
	THERMAL OVER LOAD
	AUTO RECLOSE
	MOTOR PROTECTION CIRCUIT BREAKER
	ATS SWITCH
	PUSH BUTTON
	RESTRICTED EARTH FAULT RELAY
	AUTOMOTIVE RELAY
	AUTOMOTIVE RELAY
	AUX. RELAY FOR TRANSFORMER FAULT

NOTES:-

1. ALL DIMENSIONS ARE IN MM; UNLESS NOTED OTHERWISE.
2. WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER-IN-CHARGE.
4. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.
5. ALL ELECTRICAL WORKS SHALL BE COMPLETED AS PER CPWD SPECIFICATIONS, RELEVANT IS CODE & REGULATION OF THE ELECTRICAL AUTHORITIES ETC. AS REQUIRED.
6. LAYOUT OF UNITS IS TYPICAL FOR ALL FLOOR.
7. EPC CONTRACTOR TO SUBMIT SHOP DRAWINGS FOR APPROVAL BEFORE EXECUTION OF WORK.
8. DISCREPANCY, IF ANY SHALL BE BROUGHT TO THE NOTICE OF ENGINEER-IN-CHARGE AND CLARIFICATION OBTAINED IN WRITING PRIOR TO EXECUTION OF THE WORK.

TENDER DRAWING

CLIENT	 OIL INDIA LIMITED (A Govt. of India Enterprise)	
CONSULTANT	 RITES THE INFRASTRUCTURE PEOPLE (A Govt. of India Enterprise)	
MEP CONSULTANT	 PKV CONSULTING ENGINEERS (P) LTD. 815 - C DDA FLATS EAST OF LONI ROAD DELHI - 110093 email:- info@pkv.co.in	
JOB TITLE	BQ WORKMEN GROUP HOUSING COMPLEX AT DULIAJAN ASSAM.	
DRAWING TITLE	SLD OF ESSENTIAL PANEL,COMMON AREA PANEL & UPS PANEL	
SCALE	DATE	DRG. NO.
NTS	JULY 2025	RITES/BLD/EL/TEN/207

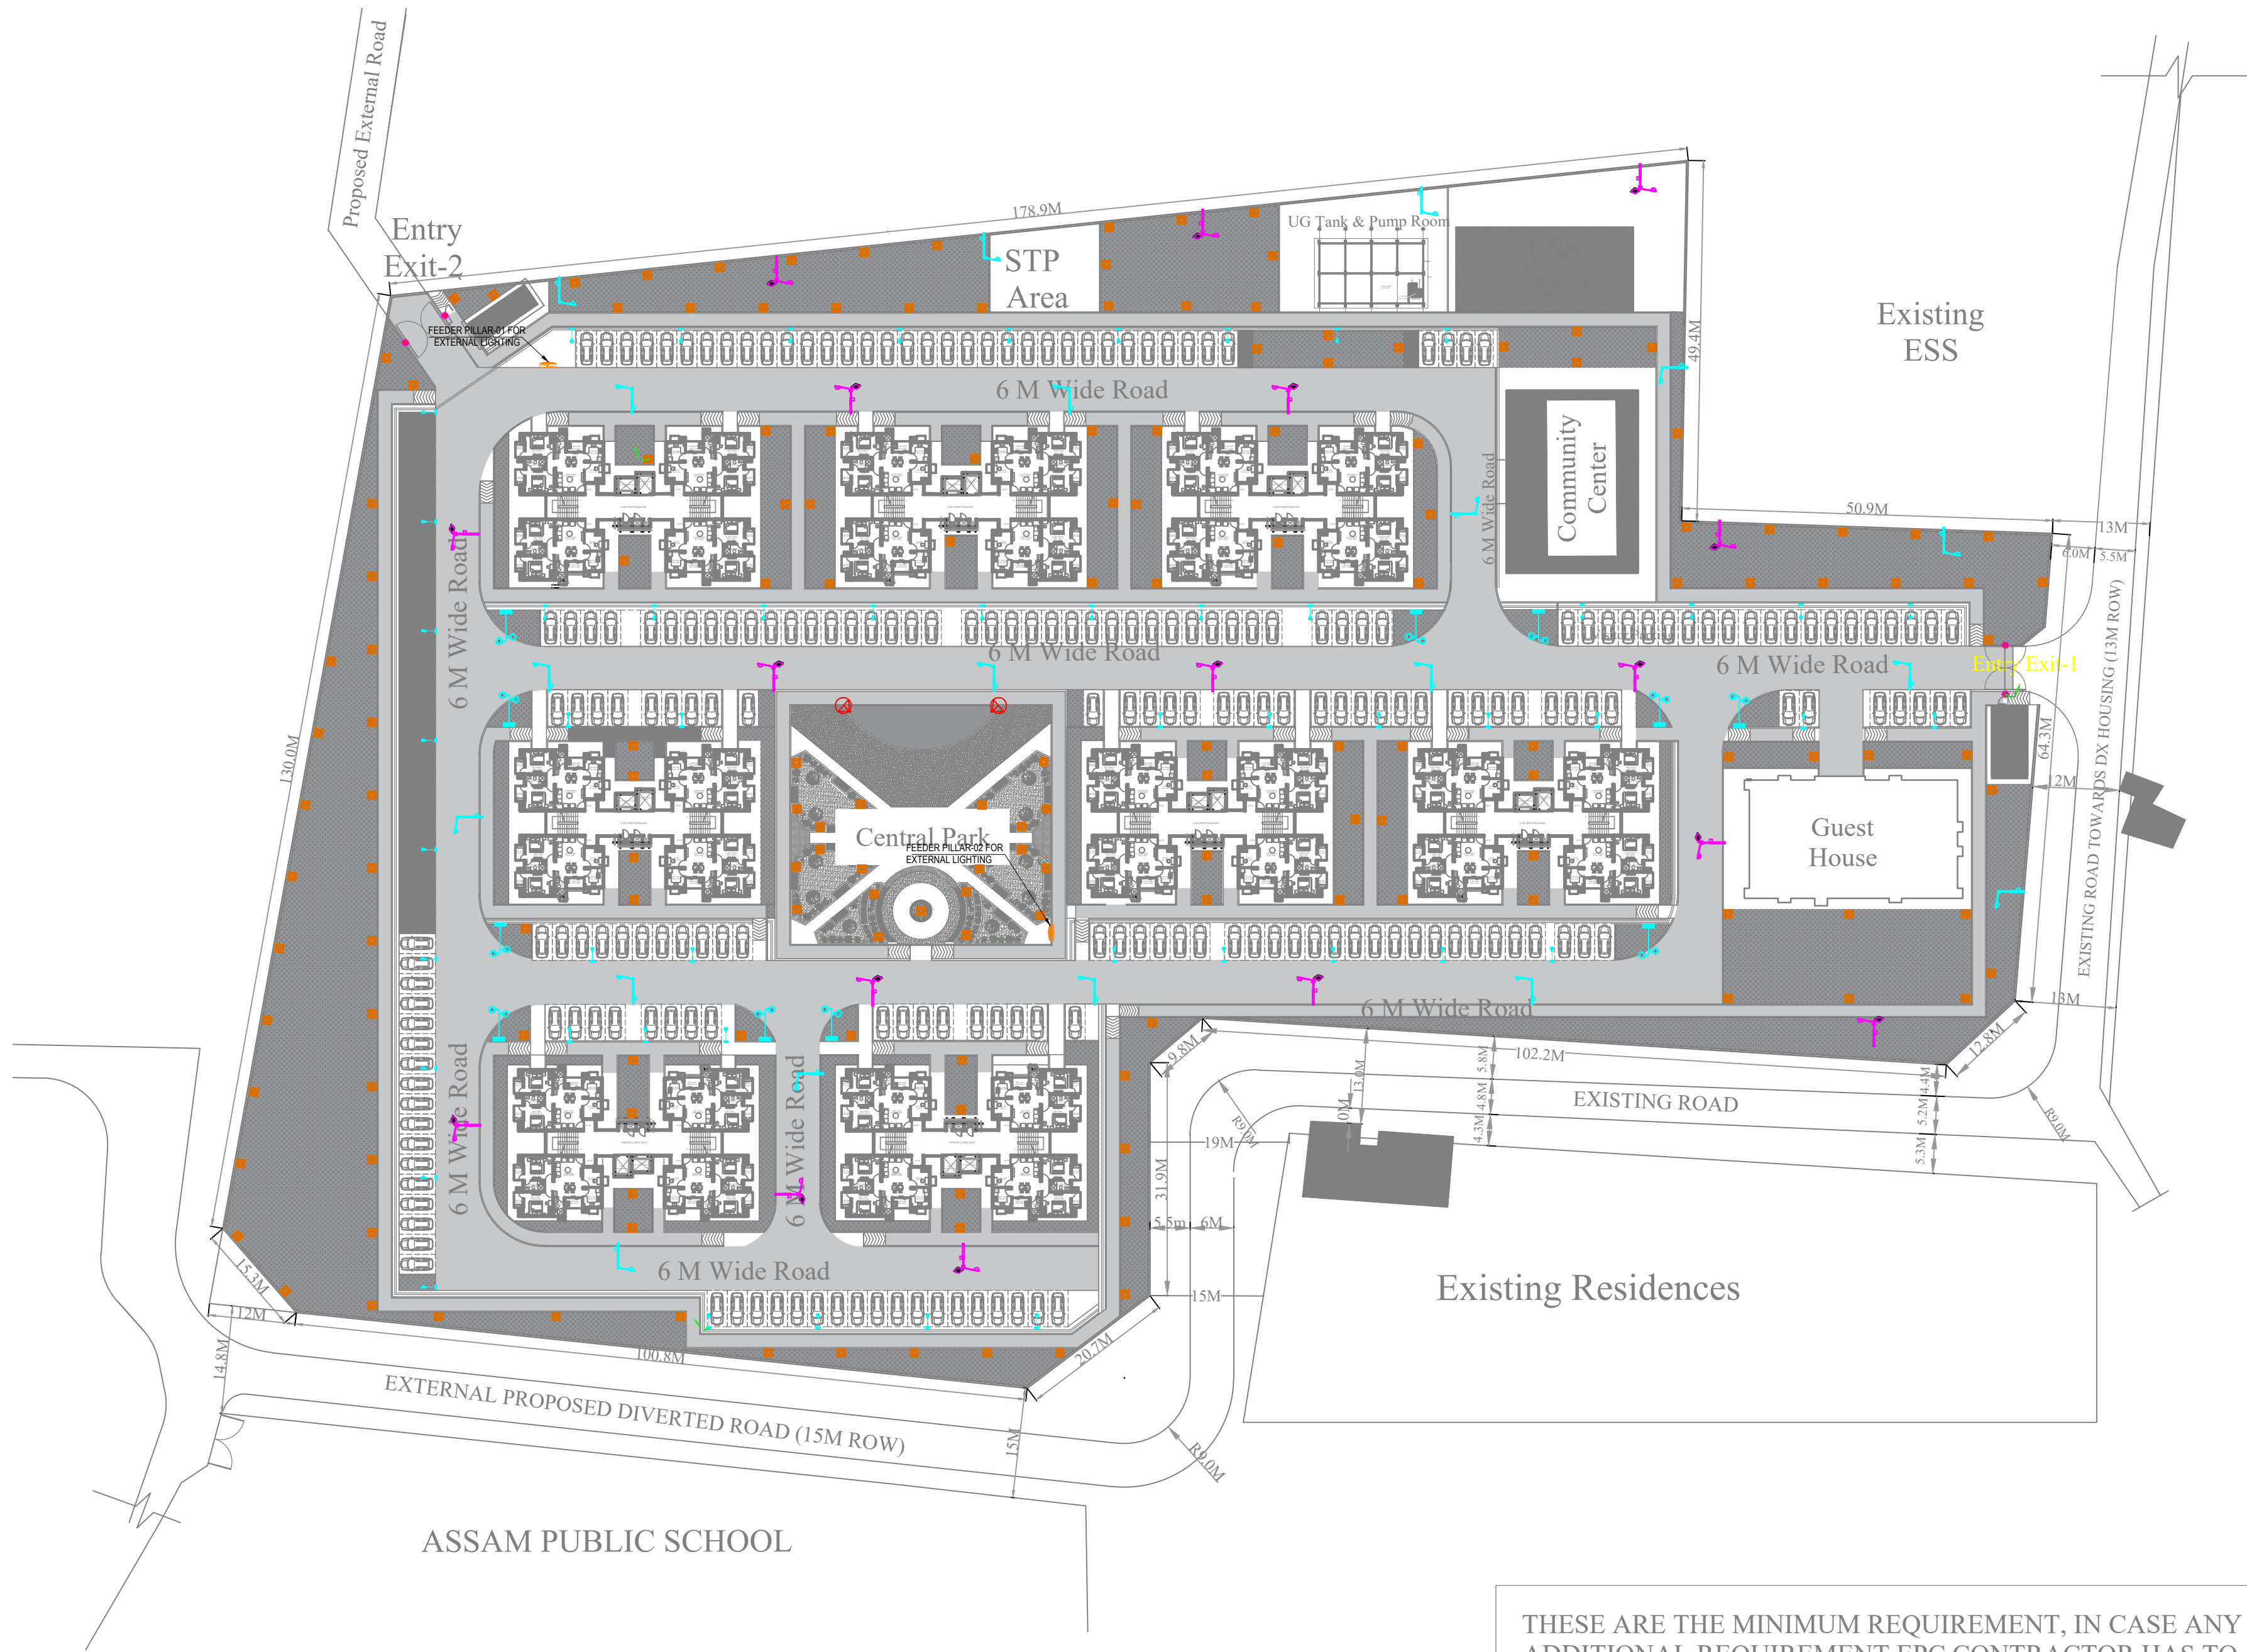

STREET LIGHTING (SINGLE ARM)
HEIGHT OF POLE: 9M
BRACKET ARM:1M

POST TOP LIGHTING
HEIGHT OF POLE: 4M

SITE LAYOUT

THESE ARE THE MINIMUM REQUIREMENT, IN CASE ANY
ADDITIONAL REQUIREMENT EPC CONTRACTOR HAS TO
CONSIDER WITHOUT ANY EXTRA COST

S. NO.	SYMBOL	DESCRIPTION
1		70W LED STREET LIGHT(POLE HT- 9 MTR) 1 MTR BRACET 20 DEGREE TILT
2		70 W SOLAR (HYBRID) LED STREET LIGHT(POLE HT-9MTR)
3		30W GATE LIGHT
4		11W BOLLARD
5		30 W POST TOP LIGHT (SINGLE LIGHT) (POLE HT-4 MTR)
6		POST TOP LIGHT (DOUBLE LIGHT) (POLE HT-4MTR)
7		200W IMAGE PROJECTOR LIGHT
8		FEEDER PILLAR

- NOTES:-
- ALL DIMENSIONS ARE IN MM; UNLESS NOTED OTHERWISE.
 - WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
 - ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER-IN-CHARGE.
 - THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.
 - ALL ELECTRICAL WORKS SHALL BE COMPLETED AS PER CPWD LATEST SPECIFICATIONS,RELEVANT IS CODE & REGULATION OF THE ELECTRICAL AUTHORITIES ETC. AS REQUIRED.
 - EPC CONTRACTOR TO SUBMIT SHOP DRAWINGS FOR APPROVAL BEFORE EXECUTION OF WORK.
 - DISCREPANCY, IF ANY SHALL BE BROUGHT TO THE NOTICE OF ENGINEER-IN-CHARGE AND CLARIFICATION OBTAINED IN WRITING PRIOR TO EXECUTION OF THE WORK.

TENDER DRAWING

CONSULTANT :



MEP CONSULTANT



PKV Consulting Engineers (P) Ltd.
C-815, DDA Flats Loni Road, Delhi -110093
E-mail - pramod@pkv.co.in, info@pkv.co.in
TELEFAX - 011-22816297

REVISION DATE DESCRIPTIONS

PROJECT:
BQ WORKMEN GROUP HOUSING
COMPLEX AT DULIAJAN ASSAM.

CLIENT:-



OIL INDIA LIMITED
(A Govt. of India Enterprise)

DRAWING TITLE :

EXTERNAL STREET LIGHTING LAYOUT PLAN

SCALE	DATE:	DRAWING NUMBER
NTS	JULY 2025	MITES/BLD/EL/TEN/209