

## **TENDER DOCUMENT FOR**

**“Conversion of SP shed to regular staff quarters including construction of shortfall quarters at JNV Azamgarh(UP)”**

**Tender No: TCIL/C/PD(UP)/NVS/2026/08**

**Issued on: 16.05.2026**

## **Volume II: Financial Bid**

Issued By:

**PROJECT DIRECTOR (UP)**

K-703, Yamuna Apartments, Sector-4,  
Gomti Nagar Extension, Lucknow,  
Uttar Pradesh- 226010

Email: [rajesh.jain2@tcil.net.in](mailto:rajesh.jain2@tcil.net.in)

Visit us at <http://www.tcil.net.in>



**Telecommunications Consultants India Ltd.**  
(A Govt. of India Enterprise)  
HQ: TCIL Bhawan, Greater Kailash-I  
New Delhi – 110048 (India)  
**Telephone no.:011-26202020, Fax:011-26241865**  
**website: www.tcil.net.in**



# **Volume II**

# **Financial Bid**

**VOLUME - II**  
**FORWARDING LETTER – PART (A)**

CONTRACTOR'S NAME & ADDRESS: \_\_\_\_\_

CONTRACTOR'S TELEPHONE No.: \_\_\_\_\_

E-mail \_\_\_\_\_

To

Project Director(UP)  
Telecommunications Consultants India Limited  
Lucknow(UP)

Dear Sir,

I/We submit the e-tender for \_\_\_\_\_ for Tender No:  
\_\_\_\_\_ Date: \_\_\_\_\_

1. I/We have thoroughly examined and understood instructions to contractors, terms and conditions of the contract given in the NIT and those contained in the general conditions of contract and its appendices, and annexure and agree to abide by all the terms & conditions of the tender document and corrigendum etc.

I/We offer to carry out the work at the price quoted in the price schedule Part (B).

It is confirmed that the rates quoted above are all inclusive of all charges, costs, taxes, levies etc. including GST, as applicable, for the performance of the contract.

2. I/We agree to keep the offer open for acceptance upto and inclusive of the date under clause 2.6 of Section-2. I/ We shall be bound by communication of acceptance of the offer dispatched within the time.
3. I / We do hereby declare that the entries made in the tender and appendices attached therein are true and also that I/We shall be bound by the act of my/our dulyconstituted attorney Mr./Ms. \_\_\_\_\_ whose signature is appended here to in the space specified for the purpose and of any other person who in future may be appointed by me/ us to carry out the business of the firm.

Yours faithfully

\_\_\_\_\_  
(Signature of Constituted Attorney)  
(Signature of contractor)  
(Capacity in which signing along with seal)

NOTE:

- (1) If the discrepancy exists between figures & words in quotations, in that case the amount in words will prevail.
- (2) Absurd / Abnormal rates will not be considered by theEmployer.

Name and address of Bidder

Name\_\_\_\_\_

Address:\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

Date:\_\_\_\_\_

Name and address of witness

Name\_\_\_\_\_

Address:\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

Date:\_\_\_\_\_

**PART – B**  
**Financial Bid**  
(ON THE BIDDER'S LETTER HEAD)

To

Project Director (UP)  
Telecommunications  
Consultants India Ltd.  
Lucknow(UP)

**Sub: Conversion of SP shed to regular staff quarters including construction of shortfall quarters at JNV Azamgarh(UP)”**

**NIT No: TCIL/C/PD(UP)/NVS/2026/08, dated 16.05.2026**

Sir,

We offer to perform the Works described above in accordance with the Conditions of Contract accompanying this Bid withRs.(In figures)andRupees \_\_\_\_\_ (Inwords).

Our Offered cost is inclusive of all charges, costs, taxes, levies etc. including GST, as applicable; as per the conditions of the proposal. GST shall be paid subject to receipt of the same by owner on back to back terms.

This Bid alongwith addendums/ corrigenda and written acceptance of it shall constitute a binding Contract between us. We understand that you are not bound to accept the lowest or any Bid you receive.

We hereby confirm that this Bid complies with the Bid Validity, Tender Fee and Earnest Money Deposit required as per biddingdocuments.

Yours faithfully,

Authorized Signatory.....  
Name and Title of Signatory.....  
Name of bidder.....  
Address: .....  
Date: .....

| Conversion of SP shed to regular staff quarters including construction of shortfall quarters at JNV Azamgarh(UP)                                                                                                                                                                                                                                                                                                                                                                          |                                     |                       |                                                                                |                 |                  |                     |          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|-----------------------|--------------------------------------------------------------------------------|-----------------|------------------|---------------------|----------|
| NIT No. TCIL/C/PD(UP)/NVS/2026/08                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                     |                       |                                                                                |                 | Date: 16.05.2026 |                     |          |
| <u>Summary of Cost</u>                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                     |                       |                                                                                |                 |                  |                     |          |
| Name of Bidder : M/s                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                     |                       |                                                                                |                 |                  |                     |          |
| S. No.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Description                         | BOQ Cost in INR       | Percentage quoted by the tenderer above/ below/ at par the total amount of BOQ |                 |                  | Quoted Amount (INR) |          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                     |                       | Above/ Below/ At par                                                           | % age in figure | % age in Words   | in figure           | in Words |
| [1]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | [2]                                 | [3]                   | [4]                                                                            | [5]             | [6]              | [7]                 | [8]      |
| a)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | DSR Items and NDSR items            | 3,07,51,000.00        | Above/Below/At par                                                             |                 |                  |                     |          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <b>Total Overall Estimated Cost</b> | <b>3,07,51,000.00</b> |                                                                                |                 |                  |                     |          |
| NOTE:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                     |                       |                                                                                |                 |                  |                     |          |
| 1. The tenderer shall furnish their rate in terms of % above/ below/ at par against <b>OVERALL ESTIMATED COST</b>                                                                                                                                                                                                                                                                                                                                                                         |                                     |                       |                                                                                |                 |                  |                     |          |
| 2. If the tenderer choose to opt "At par" under column 4, then the value against 'percentage' in figures in column 5 shall be inserted as '0' (i.e. zero). In such case, if the tenderer fills any value of percentage (other than '0') under column 5, then it will not be given any cognizance and "At par" option (i.e. "Zero" percent) chosen by the tenderer shall take precedence and the amount will be taken as "At par" irrespective of the percentage mentioned under column 5. |                                     |                       |                                                                                |                 |                  |                     |          |
| 3. Bidder will quote its rates inclusive of all charges, costs, taxes, levies etc. including GST, as applicable.<br>The Estimated Cost put to tender has been reckoned from DSR-2023 (Civil) & DSR-2025 (Electrical) for scheduled items and is inclusive of GST as applicable. Accordingly the bidder shall quote its rates inclusive of all charges, costs, taxes, levies etc. including GST, as applicable considering the latest govt. notifications/ guidelines in this regard.      |                                     |                       |                                                                                |                 |                  |                     |          |
| Date                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                     |                       |                                                                                |                 |                  |                     |          |
| Place                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                     |                       |                                                                                |                 |                  |                     |          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                     |                       |                                                                                |                 |                  |                     |          |
| Seal & Signature of Authorised signatory of Bidder                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                     |                       |                                                                                |                 |                  |                     |          |

| "Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (U.P)" |                                                                                                |                                      |               |             |         |
|--------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|--------------------------------------|---------------|-------------|---------|
| SUMMARY OF COST                                                                            |                                                                                                |                                      |               |             |         |
| S.N.                                                                                       | Description                                                                                    | Amount (Lakh) as per Detail Estimate |               |             | Remarks |
|                                                                                            |                                                                                                | DSR-2025                             | DSR-2023      | Market Rate |         |
| 1                                                                                          | TYPE-II QUARTERS TRIPLE STOREY, RCC FRAMED STRUCTURE 8 NOS. (G+1) 1 BLOCK<br>AREA = 693.48 SQM | 5.30                                 | 196.18        | 4.90        |         |
| 2                                                                                          | GUEST HOUSE SINGLE STOREY, RCC FRAMED STRUCTURE<br>AREA = 133.49 SQM                           | 1.26                                 | 37.87         | 0.73        |         |
|                                                                                            | <b>SUB TOTAL (A)</b>                                                                           | <b>6.56</b>                          | <b>234.05</b> | <b>5.63</b> |         |
|                                                                                            | <b>SUB TOTAL (B)</b>                                                                           | <b>246.24</b>                        |               |             |         |
|                                                                                            | Add for Development                                                                            | 61.27                                |               |             |         |
|                                                                                            | <b>SUB TOTAL (C)</b>                                                                           | <b>307.51</b>                        |               |             |         |

**Detail estimate of "Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (U.P)"**

| S.No.    | PARTICULARS OF ITEMS    | Amount As per Detailed BOQ |                      |                   |
|----------|-------------------------|----------------------------|----------------------|-------------------|
|          |                         | DSR-25 Items               | DSR-2023 Items       | NSR Items         |
|          |                         |                            |                      |                   |
| <b>1</b> | <b>TYPE-II QUARTERS</b> |                            |                      |                   |
|          | Civil Work              |                            | 18,775,048.66        | 97,488.36         |
|          | Plumbing Work           |                            | 842,998.47           | 50,562.67         |
|          | Electrical Work         | 529,922.67                 |                      | 341,942.85        |
|          | <b>Total</b>            | <b>529,922.67</b>          | <b>19,618,047.13</b> | <b>489,993.88</b> |
|          |                         |                            |                      |                   |
| <b>2</b> | <b>GUEST HOUSE</b>      |                            |                      |                   |
|          | Civil Work              |                            | 3,578,792.44         | -                 |
|          | Plumbing Work           |                            | 208,640.98           | -                 |
|          | Electrical Work         | 125,610.03                 |                      | 72,598.08         |
|          | <b>Total</b>            | <b>125,610.03</b>          | <b>3,787,433.42</b>  | <b>72,598.08</b>  |
|          |                         |                            |                      |                   |



**Detail estimate of “Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (UP)”**

**(G+1)**

**SUMMARY OF CIVIL WORK STAFF QUARTERS TYPE II**

| <b>S. No.</b> | <b>Description</b>                | <b>Amount (Rs.)</b> |  |
|---------------|-----------------------------------|---------------------|--|
| 1             | EARTH WORK                        | 184194.10           |  |
| 2             | CONCRETE WORK                     | 68361.25            |  |
| 3             | REINFORCED CEMENT CONCRETE        | 6492734.88          |  |
| 4             | BRICK WORK                        | 1822099.70          |  |
| 5             | MARBLE WORK                       | 579320.54           |  |
| 6             | WOOD WORK & PVC WORK              | 877357.65           |  |
| 7             | STEEL WORK                        | 546916.62           |  |
| 8             | FLOORING                          | 1134123.13          |  |
| 9             | ROOFING                           | 195157.05           |  |
| 10            | FINISHING                         | 1318130.75          |  |
| 11            | ALUMINIUM WORK                    | 862890.83           |  |
|               | <b>Total for (6 Nos quarters)</b> | <b>14081286.49</b>  |  |
|               | <b>Total for (8 Nos quarters)</b> | <b>18775048.66</b>  |  |
|               | Non DSR Amount                    | 73116.27            |  |
|               | <b>Total (6 Nos)</b>              | <b>73116.27</b>     |  |
|               | <b>Total (8 Nos)</b>              | <b>97488.36</b>     |  |

**Detail estimate of "Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (UP)"**

**COST ESTIMATE OF STAFF QUARTERS TYPE II**

| S. No. | Ref. No  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Unit     | Quantity | DSR 23 Rate | Amount (Rs.)     |
|--------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|-------------|------------------|
| 1      | 2        | 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 4        | 5.00     | 6.00        | 7.00             |
| 1      | 2        | <b>EARTH WORK</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |          |          |             |                  |
| 1.01   | 2.8      | Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan), including dressing of sides and ramming of bottoms, lift upto 1.5 m, including getting out the excavated soil and disposal of surplus excavated soil as directed, within a lead of 50 m                                                                                                                                                                                                                                                                                                                                  |          |          |             |                  |
| a)     | 2.8.1    | All kinds of soil                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Cum      | 487.00   | 260.30      | 126766.10        |
| 1.02   | 2.25     | Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20cm in depth, consolidating each deposited layer by ramming and watering. lead up to 50 m and lift upto 1.5 m.                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Cum      | 293.00   | 196.00      | 57428.00         |
|        |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |          |          |             |                  |
|        |          | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |          |          |             | <b>184194.10</b> |
| 2      | 4        | <b>CONCRETE WORK</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |          |          |             |                  |
| 2.01   | 4.1      | Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |          |          |             |                  |
| a)     | 4.1.10   | 1:5:10 (1 Cement : 5 coarse sand (zone-III) : 10 graded stone aggregate 40 mm nominal size)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Cum      | 9.64     | 6518.60     | 62826.27         |
| 2.02   | 4.2      | Providing and laying cement concrete in retaining walls, return walls, walls (any thickness) including attached pilasters, columns, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, coping, bed blocks, anchor blocks, plain window sills, fillets, sunken floor etc., up to floor five level, excluding the cost of centering, shuttering and finishing :                                                                                                                                                                                                                                                                                          |          |          |             |                  |
| a)     | 4.2.3    | 1:2:4 (1 Cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Cum      | 0.56     | 9895.20     | 5534.98          |
|        |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |          |          |             |                  |
|        |          | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |          |          |             | <b>68361.25</b>  |
| 3      | 5        | <b>REINFORCED CEMENT CONCRETE</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |          |          |             |                  |
| 3.01   | 5.9      | Centering and shuttering including strutting, propping etc. and removal of form for all heights:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |          |          |             |                  |
| a)     | 5.9.1    | Foundations, footings, bases of columns, etc. for mass concrete                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Sqm      | 98.82    | 392.15      | 38753.99         |
| c)     | 5.9.6    | Columns, Pillars, Piers, Abutments, Posts and Struts                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Sqm      | 527.40   | 961.30      | 506989.62        |
| d)     | 5.9.15   | Small lintels not exceeding 1.5 m clear span, moulding as in cornices, window sills, string courses, bands, copings, bed plates, anchor blocks and the like                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Sqm      | 4.86     | 392.15      | 1907.42          |
| e)     | 5.9.16   | Edges of slabs and breaks in floors and walls                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |          |             |                  |
| f)     | 5.9.16.1 | Under 20 cms wide                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | metre    | 134.20   | 208.55      | 27987.41         |
| g)     | 5.9.3    | Suspended floors, roofs, landings, balconies and access platform.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Sqm      | 339.20   | 927.25      | 314524.08        |
| h)     | 5.9.5    | Lintels, beams, plinth beams, girders, bressumers and cantilevers.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Sqm      | 468.75   | 736.40      | 345184.05        |
| 3.02   | 5.18     | Providing precast cement concrete Jali 1:2:4 (1 cement : 2 coarse sand(zone-III) : 4 graded stone aggregate 6mm nominal size), reinforced with 1.6 mm dia mild steel wire, including centering and shuttering, roughening cleaning, fixing and finishing with cement mortar 1:3 (1 cement: 3 fine sand) etc. complete, excluding plastering of the jambs, sills and soffits                                                                                                                                                                                                                                                                                                                   |          |          |             |                  |
| a)     | 5.18.1   | 50 mm thick                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Sqm      | 3.30     | 1886.90     | 6226.77          |
| 3.03   | 5.22     | Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth & above plinth level.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |          |             |                  |
| a)     | 5.22.6   | Thermo-Mechanically Treated bars of grade Fe-500D or more.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | kilogram | 30433.00 | 107.85      | 3282199.05       |
| 3.04   | 5.30     | Add for plaster drip course/ groove in plastered surface or moulding to R.C.C. projections.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | metre    | 26.70    | 78.40       | 2093.28          |
| 3.05   | 5.33     | Providing and laying in position machine batched and machine mixed design mix M-25 grade cement concrete for reinforced cement concrete work, using cement content as per approved design mix, including pumping of concrete to site of laying but excluding the cost of centering, shuttering, finishing and reinforcement, including admixtures in recommended proportions as per IS: 9103 to accelerate, retard setting of concrete, improve workability without impairing strength and durability as per direction of Engineer-in-charge. (Note :- Cement content considered in this item is @ 330 kg/cum. Excess/ less cement used as per design mix is payable/recoverable as per rate) |          |          |             |                  |
| (i)    | 5.33.1   | All works upto plinth level                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Cum      | 94.51    | 9504.75     | 898305.35        |
| (ii)   | 5.33.2   | All works above plinth level upto floor V level                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Cum      | 108.37   | 9860.40     | 1068563.86       |

| S. No. | Ref. No | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Unit  | Quantity | DSR 23 Rate | Amount (Rs.) |
|--------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------|-------------|--------------|
|        |         | Total of sub-head                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |          |             | 6492734.88   |
| 4      | 6.00    | BRICK WORK                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |       |          |             |              |
| 4.01   | 6.1     | Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in foundation and plinth in:                                                                                                                                                                                                                                                                                                                                                                                                        |       |          |             |              |
| a)     | 6.1.2   | Cement mortar 1:6 (1 cement : 6 coarse sand)                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Cum   | 22.58    | 7132.25     | 161062.25    |
| 4.02   | 6.47    | Providing and laying autoclaved aerated cement blocks masonry with 150mm/230mm/300 mm thick AAC blocks in super structure above plinth level up to floor V level with RCC band at sill level and lintel level with approved block laying polymer modified adhesive mortar all complete as per direction of Engineer-in-Charge. (The payment of RCC band and reinforcement shall be made for separately).                                                                                                                   |       |          |             |              |
| a)     |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Cum   | 167.14   | 8333.65     | 1392863.43   |
| 4.03   | 6.13    | Half brick masonry with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in superstructure above plinth level up to floor V level.                                                                                                                                                                                                                                                                                                                                                                   |       |          |             |              |
| a)     | 6.13.2  | Cement mortar 1:4 (1 cement : 4 coarse sand)                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Sqm   | 218.28   | 1123.80     | 245298.68    |
| 4.04   | 6.15    | Extra for providing and placing in position 2 Nos 6mm dia. M.S. bars at every third course of half brick masonry.                                                                                                                                                                                                                                                                                                                                                                                                          | Sqm   | 218.28   | 104.80      | 22875.34     |
|        |         | Total of sub-head                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |          |             | 1822099.70   |
| 5      | 8       | MARBLE WORK                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |       |          |             |              |
| 5.01   | 8.1     | Marble work gang saw cut (polished and machine cut) of thickness 18 mm for wall lining (veneer work), backing filled with a grout of average 12 mm thick cement mortar 1:3 (1 cement : 3 coarse sand), including pointing with white cement mortar 1:2 (1 white cement : 2 marble dust) with an admixture of pigment to match the marble shade (To be secured to the backing by means of cramps, which shall be paid for separately).                                                                                      |       |          |             |              |
| a)     | 8.1.1   | Raj Nagar Plain white marble/ Udaipur green marble/ Zebra black marble.                                                                                                                                                                                                                                                                                                                                                                                                                                                    |       |          |             |              |
| (i)    | 8.1.1.2 | Area of slab over 0.50 sqm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Sqm   | 80.41    | 5938.00     | 477450.83    |
| 5.02   | 8.2     | Providing and fixing 18 mm thick gang saw cut, mirror polished, premoulded and prepolished, machine cut for kitchen platforms, vanity counters, window sills, facias and similar locations of required size, approved shade, colour and texture laid over 20 mm thick base cement mortar 1:4 (1 cement : 4 coarse sand), joints treated with white cement, mixed with matching pigment, epoxy touch ups, including rubbing, curing, moulding and polishing to edges to give high gloss finish etc. complete at all levels. |       |          |             |              |
| a)     | 8.2.2   | Granite of any colour and shade                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |       |          |             | -            |
| (i)    | 8.2.2.2 | Area of slab over 0.50 sqm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Sqm   | 13.18    | 5136.30     | 67675.89     |
| 5.03   | 8.3     | Providing edge moulding to 18 mm thick marble stone counters, Vanities etc., including machine polishing to edge to give high gloss finish etc. complete as per design approved by Engineer-in-Charge.                                                                                                                                                                                                                                                                                                                     |       |          |             |              |
| a)     | 8.3.2   | Granite work                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Metre | 21.96    | 510.95      | 11220.46     |
| 5.04   | 8.4     | Extra for fixing marble /granite stone, over and above corresponding basic item, in facia and drops of width upto 150 mm with epoxy resin based adhesive, including cleaning etc. complete.                                                                                                                                                                                                                                                                                                                                | Metre | 21.96    | 568.55      | 12485.36     |
| 5.05   | 8.22    | Providing and fixing adjustable stainless steel cramps of approved quality, required shape and size, adjustable with stainless steel nuts, bolts and washer (total weight not less than 260 gms), for dry stone cladding fixed on frame work at suitable location, including making necessary recesses in stone slab, drilling required holes etc complete as per direction of the Engineer-in-charge.                                                                                                                     | Each  | 24.00    | 437.00      | 10488.00     |
|        |         | Total of sub-head                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |          |             | 579320.54    |
| 6      | 9       | WOOD WORK & PVC WORK                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |       |          |             |              |
| 6.01   | 9.1     | Providing wood work in frames of doors, windows, clerestory windows and other frames, wrought framed and fixed in position with hold fast lugs or with dash fasteners of required dia & length ( hold fast lugs or dash fastener shall be paid for separately).                                                                                                                                                                                                                                                            |       |          |             |              |
| a)     | 9.1.1   | Second class teak wood                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Cum   | 0.15     | 142949.70   | 21819.84     |
| 6.02   | 9.2     | Providing and fixing ISI marked flush door shutters conforming to IS : 2202 (Part I) decorative type, core of block board construction with frame of 1st class hard wood and well matched teak 3 ply veneering with vertical grains or cross bands and face veneers on both faces of shutters.                                                                                                                                                                                                                             |       |          |             |              |
| a)     | 9.20.3  | 25 mm thick (for cupboard) including ISI marked nickel plated bright finished M.S. Piano hinges IS : 3818 marked with necessary screws                                                                                                                                                                                                                                                                                                                                                                                     | Sqm   | 12.60    | 2819.25     | 35522.55     |

| S. No. | Ref. No     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Unit  | Quantity | DSR 23 Rate | Amount (Rs.)     |
|--------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------|-------------|------------------|
| 6.03   | 9.21        | Providing and fixing ISI marked flush door shutters conforming to IS : 2202 (Part I) non-decorative type, core of block board construction with frame of 1st class hard wood and well matched commercial 3 ply veneering with vertical grains or cross bands and face veneers on both faces of shutters:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |       |          |             |                  |
| a)     | 9.21.1      | 35 mm thick including ISI marked Stainless Steel butt hinges with necessary screws                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Sqm   | 22.68    | 2392.65     | 54265.30         |
| 6.04   | 9.23        | Extra for providing lipping with 2nd class teak wood battens 25 mm minimum depth on all edges of flush door shutters (over all area of door shutter to be measured).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Sqm   | 35.28    | 462.35      | 16311.71         |
| 6.05   | 9.27        | Providing and fixing wire gauge shutters using galvanized M.S. wire gauge of average width of aperture 1.4 mm in both directions with wire of dia 0.63 mm, for doors, windows and clerestory windows with hinges and necessary screws :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |       |          |             |                  |
| i)     | 9.27.1      | 35 mm thick shutters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |       |          |             |                  |
| a)     | 9.27.1.1.2  | Kiln seasoned and chemically treated hollock wood                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Sqm   | 15.00    | 3599.20     | 53988.00         |
| 6.06   | 9.48        | Providing and fixing M.S. grills of required pattern in frames of windows etc. with M.S. flats, square or round bars etc. including priming coat with approved steel primer all complete.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |       |          |             |                  |
| i)     | 9.48.1      | Fixed to steel windows by welding                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Kg    | 927.37   | 219.10      | 203186.55        |
| 6.07   | 9.96        | Providing and fixing aluminium sliding door bolts, ISI marked anodised (anodic coating not less than grade AC 10 as per IS : 1868), transparent or dyed to required colour or shade, with nuts and screws etc. complete :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |       |          |             |                  |
| a)     | 9.96.2      | 250x16 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Each  | 36.00    | 260.60      | 9381.60          |
| 6.08   | 9.97        | Providing and fixing aluminium tower bolts, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868 ) transparent or dyed to required colour or shade, with necessary screws etc. complete :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |       |          |             |                  |
| a)     | 9.97.3      | 200x10 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Each  | 72.00    | 99.70       | 7178.40          |
| 6.09   | 9.101       | Providing and fixing aluminium hanging floor door stopper, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour and shade, with necessary screws etc. complete.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |       |          |             |                  |
| a)     | 9.101.2     | Twin rubber stopper                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Each  | 24.00    | 72.35       | 1736.40          |
| 6.10   | 9.124       | Providing and fixing factory made 30 mm thick door shutter made of solid PVC foam profile. The styles & rails shall be of size 75 mm x 30 mm having wall thickness 5 mm. The styles, top & bottom rails shall have one side wall thickness of 15 mm integrally extruded on the hinge side of the profile for better screw holding power. The styles and rails shall be reinforced with M.S. tubes of size 33 mm x 17 mm x 1 mm, painted with primer , all four corners of reinforcement to be welded or sealed. Solid PVC extruded bidding (push fit type) will be set inside the styles and the rails with a cavity, to receive single piece extruded 5mm PVC sheet as panel. The styles and rails will be mitred cut and joint with the help of PVC solvent cement & self driven self tapping screws. Single piece extruded solid PVC lock rail of size 100 mm x 30 mm with wall thickness 5 mm & 15 mm integrally extruded in the middle of the lock rail & fixed with styles with the help of PVC solvent cement & self driven self tapping screws of size 100mm x 8 mm complete as per manufacturer's specifications and direction of |       |          |             |                  |
| a)     | 9.124.2     | Decorative finish (both side wood grained finish)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Sqm   | 19.00    | 4138.35     | 78628.65         |
| 6.11   | 9.130       | Providing and fixing cup board shutters with 25 mm thick veneered particle board IS : 3097 marked, exterior grade (Grade I), of approved make, including IInd class teak wood lipping of 25 mm wide x 12 mm thick with necessary screws and bright finished stainless steel piano hinges, complete as per direction of Engineer-in-Charge.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |       |          |             |                  |
| a)     | 9.130.1     | With decorative veneering on one side and commercial veneering on other side                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Sqm   | 18.36    | 1927.50     | 35388.90         |
| 6.12   | dsr-9.7.7.2 | Float glass panes 5.0 mm thick glass panes (weight not less than 12.50 kg/sqm).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Sqm   | 76.09    | 2600.45     | 197869.54        |
| 6.13   | 9.127.2     | <b>MODULAR KITCHEN</b> :-Providing & Fixing decorative high pressure laminated sheet of plain / wood grain in gloss / matt/ suede finish with high density protective surface layer and reverse side of adhesive bonding quality conforming to IS : 2046 Type S, including cost of adhesive of approved quality.1.0 mm thick Note:- Both side laminate                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Sqm   | 146.16   | 897.30      | 131149.37        |
| 6.14   | 9.173       | <b>MODULAR KITCHEN</b> :-Providing and fixing ready made 304 grade stainless steel Modular kitchen basket and accessories such as right angle basket (Plain Cup & Saucer, plant, Partition, Bottle rack, Thali, Cutlery) kitchen utensil basket, Dinner set basket, kitchen grain basket, Multipurpose basket as per site requirement including finishing (wherever required) and fittings. The same shall be fixed with necessary stainless steel nuts & bolts, Stainless Steel screws & telescopic channel etc. as per direction of Engineer-in-charge. (For payment purpose only weight of Stainless steel basket shall be considered excluding weight of all fixing accessories such as nuts, bolts, fasteners telescopic basket channels etc. Payment of providing and fixing                                                                                                                                                                                                                                                                                                                                                         | Kg    | 48.00    | 533.25      | 25596.00         |
| 6.15   | 9.174       | <b>MODULAR KITCHEN</b> :-Providing and fixing 2mm thick 16 to 19mm wide PVC edge binding tape of approved quality for cupboard/wardrobe shutters including necessary synthetic resin hot pressed to edges on binding machine etc. complete as per directions of Engineer-in-charge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | meter | 121.80   | 43.80       | 5334.84          |
|        |             | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |       |          |             | <b>877357.65</b> |

| S. No. | Ref. No   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Unit  | Quantity | DSR 23 Rate | Amount (Rs.)     |
|--------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------|-------------|------------------|
| 7      | 10        | STEEL WORK                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |       |          |             |                  |
| 7.01   | 10.14     | Providing and fixing pressed steel door frames conforming to IS: 4351, manufactured from commercial mild steel sheet of 1.60 mm thickness, including hinges, jamb, lock jamb, bead and if required angle threshold of mild steel angle of section 50x25 mm, or base ties of 1.60 mm, pressed mild steel welded or rigidly fixed together by mechanical means, including M.S. pressed butt hinges 2.5 mm thick with mortar guards, lock strike-plate and shock absorbers as specified and applying a coat of approved steel primer after pre-treatment of the surface as directed by Engineer-in-charge.                                                                              |       |          |             |                  |
| a)     | 10.14.1   | Profile B                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |       |          |             |                  |
|        | 10.14.1.1 | Fixing with adjustable lugs with split end tail to each jamb                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Meter | 61.20    | 583.30      | 35697.96         |
| 7.02   | 10.16     | Steel work in built up tubular (round, square or rectangular hollow tubes etc.) trusses etc., including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer, including welding and bolted with special shaped washers etc. complete                                                                                                                                                                                                                                                                                                                                                                                                           |       |          |             |                  |
| a)     | 10.16.1   | Hot finished welded type tubes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Kg    | 1050.00  | 194.40      | 204120.00        |
| 7.03   | 10.18     | Providing and fixing circular/ Hexagonal cast iron or M.S. sheet box for ceiling fan clamp, of internal dia 140 mm, 73 mm height, top lid of 1.5 mm thick M.S. sheet with its top surface hacked for proper bonding, top lid shall be screwed into the cast iron/ M.S. sheet box by means of 3.3 mm dia round headed screws, one lock at the corners. Clamp shall be made of 12 mm dia M.S. bar bent to shape as per standard drawing.                                                                                                                                                                                                                                               | Each  | 10.00    | 220.65      | 2206.50          |
| 7.04   | 10.28     | Providing and fixing stainless steel ( Grade 304) railing made of Hollow tubes, channels, plates etc., including welding, grinding, buffing, polishing and making curvature (wherever required) and fitting the same with necessary stainless steel nuts and bolts complete, i/c fixing the railing with necessary accessories & stainless steel dash fasteners , stainless steel bolts etc., of required size, on the top of the floor or the side of waist slab with suitable arrangement as per approval of Engineer-in-charge, (for payment purpose only weight of stainless steel members shall be considered excluding fixing accessories such as nuts, bolts, fasteners etc.) | Kg    | 121.00   | 772.40      | 93460.40         |
| 7.05   | Ref-10.28 | Providing and fixing stainless steel ( Grade 304) gate with 1 mm thick sheet made of Hollow tubes, channels, plates etc., including welding, grinding, buffing, polishing and making curvature (wherever required) and fitting the same with necessary stainless steel nuts and bolts complete, i/c fixing the gate with necessary accessories & stainless steel dash fasteners , stainless steel bolts etc., of required size, on the top of the floor or the side of waist slab with suitable arrangement as per approval of Engineer-in-charge                                                                                                                                    | Kg    | 120.00   | 772.40      | 92688.00         |
| 7.06   | 10.27     | Providing and fixing carbon steel galvanised ( minimum coating 5 micron) dash fastener of 10 mm dia double threaded 6.8 grade (yield strength 480 N/mm2), counter sunk head, comprising of 10 mm dia polyamide PA 6 grade sleeve, including drilling of hole in frame , concrete/ masonry, etc. as per direction of Engineer-in-charge                                                                                                                                                                                                                                                                                                                                               |       |          |             |                  |
| a)     | 10.27.2   | 10 x 80 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Each  | 48.00    | 137.65      | 6607.20          |
| 7.07   | 10.29     | Providing & fixing fly proof wire gauze to windows, clerestory windows & doors with M.S. Flat 15x3 mm and nuts & bolts complete.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |       |          |             |                  |
| i)     | 10.29.2   | Stainless steel (grade 304) wire gauze of 0.5 mm dia wire and 1.4 mm aperture on both sides                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Sqm   | 51.52    | 1133.55     | 58401.06         |
| 7.08   | 10.30     | Providing & fixing glass panes with putty and glazing clips in steel doors, windows, clerestory windows. all complete with :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |       |          |             |                  |
| a)     | 10.30.1   | 4.0 mm thick glass panes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Sqm   | 50.47    | 1064.65     | 53735.49         |
|        |           | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |       |          |             | <b>546916.62</b> |
| 8.00   | 11.00     | FLOORING                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |       |          |             |                  |
| 8.01   | 8.31      | Providing and fixing 1st quality ceramic glazed wall tiles conforming to IS: 15622 (thickness to be specified by the manufacturer), of approved make, in all colours, shades except burgundy, bottle green, black of any size as approved by Engineer-in-Charge, in skirting, risers of steps and dados, over 12 mm thick bed of cement mortar 1:3 (1 cement : 3 coarse sand) and jointing with grey cement slurry @ 3.3kg per sqm, including pointing in white cement mixed with pigment of matching shade complete.                                                                                                                                                                | Sqm   | 242.45   | 1267.95     | 307415.75        |
| 8.02   | 11.41     | Providing and laying vitrified floor tiles in different sizes (thickness to be specified by the manufacturer) with water absorption less than 0.08% and conforming to IS: 15622, of approved make, in all colours and shades, laid on 20mm thick cement mortar 1:4 (1 cement : 4 coarse sand), jointing with grey cement slurry @ 3.3kg/sqm including grouting the joints with white cement and matching pigments etc. complete                                                                                                                                                                                                                                                      |       |          |             |                  |
|        | 11.41.2   | Size of Tile 600x600 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Sqm   | 247.20   | 1553.45     | 384005.62        |

| S. No. | Ref. No | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Unit | Quantity | DSR 23 Rate | Amount (Rs.) |
|--------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|----------|-------------|--------------|
| 8.03   | 11.46   | Providing and laying Vitrified tiles in different sizes (thickness to be specified by manufacturer), with water absorption less than 0.08 % and conforming to I.S. 15622, of approved make, in all colours & shade, in skirting, riser of steps, over 12 mm thick bed of cement mortar 1:3 (1 cement: 3 coarse sand), jointing with grey cement slurry @ 3.3kg/sqm including grouting the joint with white cement & matching pigments etc. complete                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |      |          |             |              |
|        | 11.46.1 | Size of Tile 500x500 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Sqm  | 24.72    | 1593.90     | 39400.47     |
| 8.04   | 11.55   | Providing and laying flamed finish Granite stone flooring in required design and patterns, in linear as well as curvilinear portions of the building all complete as per the architectural drawings with 18 mm thick stone slab over 20 mm (average) thick base of cement mortar 1:4 (1 cement : 4 coarse sand) laid and jointed with cement slurry and pointing with white cement slurry admixed with pigment of matching shade including rubbing, curing and polishing etc. all complete as specified and as directed by the Engineer-in-Charge :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |      |          |             |              |
|        | 11.55.1 | Flamed finish granite stone slab Jet Black, Cherry Red, Elite Brown, Cat Eye or equivalent.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Sqm  | 45.45    | 3186.70     | 144835.52    |
| 8.05   | 11.56   | Providing and laying Polished Granite stone flooring in required design and patterns, in linear as well as curvilinear portions of the building all complete as per the architectural drawings with 18 mm thick stone slab over 20 mm (average) thick base of cement mortar 1:4 (1 cement : 4 coarse sand) laid and jointed with cement slurry and pointing with white cement slurry admixed with pigment of matching shade including rubbing, curing and polishing etc. all complete as specified and as directed by the Engineer-in-Charge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |      |          |             |              |
|        | 11.56.2 | Polished Granite stone slab of all colour and texture except Black, Cherry/Ruby Red                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Sqm  | 64.51    | 3071.05     | 198110.98    |
|        |         | Total of sub-head                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |      |          |             | 1134123.13   |
| 9.00   | 12      | ROOFING                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |      |          |             |              |
| 9.01   | 12.22   | Making khurras 45x45 cm with average minimum thickness of 5 cm cement concrete 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate of 20 mm nominal size) over P.V.C. sheet 1 m x1 m x 400 micron, finished with 12 mm cement plaster 1:3 (1 cement : 3 coarse sand) and a coat of neat cement, rounding the edges and making and finishing the outlet complete                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Each | 4.00     | 298.25      | 1193.00      |
| 9.02   | 12.50   | Providing and fixing precoated galvanised iron profile sheets (size, shape and pitch of corrugation as approved by Engineer-in-charge) 0.50 mm (+ 0.05 %) total coated thickness with zinc coating 120 grams per sqm as per IS: 277, in 240 mpa steel grade, 5-7 microns epoxy primer on both side of the sheet and polyester top coat 15-18 microns. Sheet should have protective guard film of 25 microns minimum to avoid scratches during transportation and should be supplied in single length upto 12 metre or as desired by Engineerin- charge. The sheet shall be fixed using self drilling /self tapping screws of size (5.5x 55 mm) with EPDM seal, complete upto any pitch in horizontal/ vertical or curved surfaces, excluding the cost of purlins, rafters and                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Sqm  | 175.00   | 738.65      | 129263.75    |
| 9.03   | 12.52   | Providing and fixing tiled false ceiling of specified materials of size 595x595 mm in true horizontal level, suspended on inter locking metal grid of hot dipped galvanized steel sections ( galvanized @ 120 grams/ sqm, both side inclusive) consisting of main "T" runner with suitably spaced joints to get required length and of size 24x38 mm made from 0.30 mm thick (minimum) sheet, spaced at 1200 mm center to center and cross "T" of size 24x25 mm made of 0.30 mm thick (minimum) sheet, 1200 mm long spaced between main "T" at 600 mm center to center to form a grid of 1200x600 mm and secondary cross "T" of length 600 mm and size 24x25 mm made of 0.30 mm thick (minimum) sheet to be interlocked at middle of the 1200x600 mm panel to form grids of 600x600 mm and wall angle of size 24x24x0.3 mm and laying false ceiling tiles of approved texture in the grid including, required cutting/making, opening for services like diffusers, grills, light fittings, fixtures, smoke detectors etc. Main "T" runners to be suspended from ceiling using GI slotted cleats of size 27 x 37 x 25 x1.6 mm fixed to ceiling with 12.5 mm dia and 50 mm long dash fasteners, 4 mm GI adjustable rods with galvanised butterfly level clips of size 85 x 30 x 0.8 mm spaced at 1200 mm center to center along main T, bottom exposed width of 24 mm of all T-sections shall be pre-painted with polyester paint, all complete for all heights as per specifications, drawings and as directed by Engineer-in-charge. |      |          |             |              |
| a)     | 12.52.1 | GI Metal Ceiling Lay in plain Tegular edge Global white color tiles of size 595x595 mm, and 0.5 mm thick with 8 mm drop; made of G I sheet having galvanizing of 100 gms/sqm (both sides inclusive) and electro statically polyester powder coated of thickness 60 microns (minimum) including factory painted after bending                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Sqm  | 34.00    | 1902.95     | 64700.30     |
|        |         | Total of sub-head                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |      |          |             | 195157.05    |
| 10.00  | 13      | FINISHING                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |          |             |              |
| 10.01  | 13.4    | 12 mm cement plaster of mix                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |      |          |             |              |
| a)     | 13.4.2  | 1:6 (1 cement: 6 coarse sand)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Sqm  | 534.37   | 343.65      | 183637.37    |
| 10.02  | 13.5    | 15 mm cement plaster on rough side of single or half brick wall of mix:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |      |          |             |              |
| a)     | 13.5.2  | 1:6 (1 cement: 6 coarse sand)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Sqm  | 890.18   | 395.35      | 351931.53    |
| 10.03  | 13.16   | 6mm cement plaster of mix                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |          |             |              |

| S. No.       | Ref. No   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Unit  | Quantity | DSR 23 Rate | Amount (Rs.) |
|--------------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------|-------------|--------------|
| a)           | 13.16.1   | 1:3 (1 cement : 3 fine sand)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Sqm   | 547.60   | 300.45      | 164525.28    |
| 10.03        | 13.37     | White washing with lime to give an even shade :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |       |          |             |              |
| a)           | 13.37.1   | New work (three or more coats)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Sqm   | 390.43   | 39.05       | 15246.11     |
| 10.04        | 13.41     | Distempering with oil bound washable distemper of approved brand and manufacture to give an even shade :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |       |          |             |              |
| a)           | 13.41.1   | New work (two or more coats) over and including water thinnable priming coat with cement primer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Sqm   | 890.62   | 185.65      | 165343.99    |
| 10.05        | 13.47     | Finishing walls with Premium Acrylic Smooth exterior paint withSilicone additives of required shade:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |       |          |             |              |
| a)           | 13.47.1   | New work (Two or more coats applied @ 1.43 ltr/10 sqm over and including priming coat of exterior primer applied @ 2.20 kg/10 sqm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Sqm   | 533.93   | 171.10      | 91355.13     |
| 10.06        | 13.50     | Applying priming coat:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |       |          |             |              |
| a)           | 13.50.2   | With ready mixed pink or Grey primer of approved brand and manufacture on wood work (hard and soft wood)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Sqm   | 158.64   | 74.65       | 11842.62     |
| b)           | 13.50.3   | With ready mixed red oxide zinc chromate primer of approved brand and manufacture on steel galvanised iron/ steel works                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Sqm   | 51.52    | 67.40       | 3472.48      |
| 10.07        | 13.62     | Painting with synthetic enamel paint of approved brand and manufacture to give an even shade :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |       |          |             |              |
| a)           | 13.62.1   | Two or more coats on new work                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Sqm   | 210.16   | 226.25      | 47549.25     |
| 10.1         | 13.80     | Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Sqm   | 1814.98  | 156.05      | 283226.98    |
|              |           | Total of sub-head                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |          |             | 1318130.75   |
| <b>11.00</b> | <b>12</b> | <b>ALUMINIUM WORK</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |       |          |             |              |
| 11.01        | 21.1      | Providing and fixing aluminium work for doors, windows, ventilators and partitions with extruded built up standard tubular sections/ appropriate Z sections and other sections of approved make conforming to IS: 733 and IS: 1285, fixing with dash fasteners of required dia and size, including necessary filling up the gaps at junctions, i.e. at top, bottom and sides with required EPDM rubber/ neoprene gasket etc. Aluminium sections shall be smooth, rust free, straight, mitred and jointed mechanically wherever required including cleat angle, Aluminium snap beading for glazing / paneling, C.P. brass / stainless steel screws, all complete as per architectural drawings and the directions of Engineer-in-charge. (Glazing, paneling and dash fasteners to be paid for separately) : |       |          |             |              |
| a)           | 21.1.1    | For fixed portion                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |          |             |              |
| b)           | 21.1.1.3  | Polyester powder coated aluminium (minimum thickness of polyester powder coating 50 micron)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Kg    | 964.08   | 539.85      | 520458.59    |
| 11.02        | 21.1.2    | For shutters of doors, windows & ventilators including providing and fixing hinges/ pivots and making provision for fixing of fittings wherever required including the cost of EPDM rubber / neoprene gasket required (Fittings shall be paid for separately)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |       |          |             |              |
| a)           | 21.1.2.3  | Polyester powder coated aluminium (minimum thickness of polyester powder coating 50 micron)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Kg    | 494.59   | 643.45      | 318242.81    |
| 11.03        | 21.8      | Filling the gap in between aluminium frame & adjacent RCC/ Brick/ Stone work by providing weather silicon sealant over backer rod of approved quality as per architectural drawings and direction of Engineer-in-charge complete.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |          |             |              |
| a)           | 21.8.1    | Upto 5mm depth and 5 mm width                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Meter | 250.02   | 96.75       | 24189.44     |
|              |           | Total of sub-head                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |          |             | 862890.83    |
| <b>13</b>    |           | <b>NON SHEDULE ITEMS</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |       |          |             |              |
| 13.01        | MR        | Providing and fixing aluminium handles, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc. complete :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |       |          |             |              |
| a)           |           | 150 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Each  | 72.00    | 75.00       | 5400.00      |
| 13.02        | MR        | Providing and fixing aluminium door buffer of approved make, design and colour with necessary screws etc all complete as directed and specified by the Engineer-in-Charge :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Each  | 30.00    | 45.00       | 1350.00      |
| 13.03        | MR        | Providing and laying 1st quality ceramic glazed Anti skid floor tiles of size 300x300 mm (thickness to be specified by the manufacturer) conforming to IS:15622 in all colours, shades, sizes as approved over 20 mm thick bed of Cement Mortar 1: 4 (1 cement : 4 Coarse Sand) including pointing the joints with white cement and matching pigment etc complete in all respects as per specifications/drawings and to the entire satisfaction to the Architect                                                                                                                                                                                                                                                                                                                                           | Sqm   | 29.10    | 1100.00     | 32014.95     |

| S. No. | Ref. No | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Unit | Quantity | DSR 23 Rate | Amount (Rs.)    |
|--------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|----------|-------------|-----------------|
| 13.04  | MR      | <b>MODULAR KITCHEN OVER HEAD &amp; CABINET</b> ;-Providing and fixing ISI marked 18mm thick commercial board conforming to IS : 2202 (Part I) non-decorative type, core of block board construction with frame of 1st class hard wood and well matched commercial 3 ply veneering with vertical grains or cross bands and face veneers on both faces of shutters. Carcass completed with 4 side panels with required shelves. Depth will be standard base units-600mm. Included hinges, handles, PVC legs, wall hanging brackets, metal wire cutlery and plate holder. overhead cabinet height will be of 600mm from floor overhead cabinet shutters will be open in groove. | Sqm  | 17.58    | 1954.00     | 34351.32        |
|        |         | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |      |          |             | <b>73116.27</b> |
|        |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |      |          |             |                 |



**Detail estimate of “Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (UP)”**

|                                      |                                   |                     |  |
|--------------------------------------|-----------------------------------|---------------------|--|
|                                      |                                   |                     |  |
| <b>SUMMARY OF STAFF QUARTERS -II</b> |                                   |                     |  |
| <b>S. No.</b>                        | <b>DESCRIPTION</b>                | <b>AMOUNT (Rs.)</b> |  |
| 1                                    | EARTH WORK                        | 7787.80             |  |
| 2                                    | ROOFING                           | 21419.40            |  |
| 3                                    | SANITARY INSTALLATIONS            | 373013.20           |  |
| 4                                    | WATER SUPPLY                      | 157939.50           |  |
| 5                                    | SEWERAGE & DRAINAGE               | 72088.95            |  |
|                                      |                                   |                     |  |
|                                      | <b>Total for (6 Nos quarters)</b> | <b>632248.85</b>    |  |
|                                      | <b>Total for (8 Nos quarters)</b> | <b>842998.47</b>    |  |
| 4                                    | NON SCHEDULE ITEMS                | 37922.00            |  |
|                                      |                                   |                     |  |
|                                      | <b>Total for (6 Nos quarters)</b> | <b>37922.00</b>     |  |
|                                      | <b>Total for (8 Nos quarters)</b> | <b>50562.67</b>     |  |

**Detail estimate of "Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (UP)"**

| COST ESTIMATE OF STAFF QUARTER-II (G+1) |           |                                                                                                                                                                                                                                                                                                                                                                                                                                           |       |       |             |                 |
|-----------------------------------------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|-------------|-----------------|
| S. No.                                  | Ref. No   | Description                                                                                                                                                                                                                                                                                                                                                                                                                               | Unit  | Qty   | DSR 23 Rate | Amount (Rs.)    |
| 1                                       | 2         | 3                                                                                                                                                                                                                                                                                                                                                                                                                                         | 4     | 5     | 6.00        | 7               |
| 1.00                                    | 2.00      | <b>EARTH WORK</b>                                                                                                                                                                                                                                                                                                                                                                                                                         |       |       |             |                 |
| 1.01                                    | 2.8       | Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan), including dressing of sides and ramming of bottoms, lift upto 1.5 m, including getting out the excavated soil and disposal of surplus excavated soil as directed within a lead of 50 m.                                                                              |       |       |             |                 |
| a)                                      | 2.8.1     | All kinds of soil.                                                                                                                                                                                                                                                                                                                                                                                                                        | Cum   | 5.00  | 260.30      | 1301.50         |
| 1.02                                    | 2.10      | Excavating trenches of required width for pipes, cables, etc including excavation for sockets, and dressing of sides, ramming of bottoms, depth upto 1.5 m, including getting out the excavated soil, and then returning the soil as required, in layers not exceeding 20 cm in depth, including consolidating each deposited layer by ramming, watering, etc. and disposing of surplus excavated soil as directed within a lead of 50 m. |       |       |             |                 |
|                                         | 2.10.1    | All kinds of soil                                                                                                                                                                                                                                                                                                                                                                                                                         |       |       |             |                 |
| a)                                      | 2.10.1.1  | Pipes, cables etc. not exceeding 80 mm dia.                                                                                                                                                                                                                                                                                                                                                                                               | Metre | 25.00 | 215.60      | 5390.00         |
| b)                                      | 2.10.1.2  | Pipes, cables etc. exceeding 80 mm dia. but not exceeding 300 mm dia                                                                                                                                                                                                                                                                                                                                                                      | Metre | 2.00  | 352.15      | 704.30          |
| 1.03                                    | 2.25      | Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20cm in depth, consolidating each deposited layer by ramming and watering, lead up to 50 m and lift upto 1.5 m.                                                                                                                                                                                                 | Cum   | 2.00  | 196.00      | 392.00          |
|                                         |           | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                                                                                                                                                  |       |       |             | <b>7787.80</b>  |
| 2.00                                    | 12.00     | <b>ROOFING</b>                                                                                                                                                                                                                                                                                                                                                                                                                            |       |       |             |                 |
| 2.01                                    | 12.41     | Providing and fixing on wall face unplasticised Rigid PVC rain water pipes conforming to IS : 13592 Type A, including jointing with seal ring conforming to IS : 5382, leaving 10 mm gap for thermal expansion. (i) Single socketed pipes.                                                                                                                                                                                                |       |       |             |                 |
| A)                                      | 12.41.2   | 110 mm diameter                                                                                                                                                                                                                                                                                                                                                                                                                           | Metre | 36.00 | 377.40      | 13586.40        |
| 2.02                                    | 12.42     | Providing and fixing on wall face unplasticised - PVC moulded fittings/ accessories for unplasticised Rigid PVC rain water pipes conforming to IS : 13592 Type A, including jointing with seal ring                                                                                                                                                                                                                                       |       |       |             |                 |
| i)                                      | 12.42.1   | Coupler                                                                                                                                                                                                                                                                                                                                                                                                                                   |       |       |             |                 |
| a)                                      | 12.42.1.2 | 110 mm                                                                                                                                                                                                                                                                                                                                                                                                                                    | Each  | 4.00  | 136.15      | 544.60          |
| ii)                                     | 12.42.5   | Bend 87.5°                                                                                                                                                                                                                                                                                                                                                                                                                                |       |       |             |                 |
| a)                                      | 12.42.5.2 | 110 mm bend                                                                                                                                                                                                                                                                                                                                                                                                                               | Each  | 4.00  | 150.35      | 601.40          |
| iii)                                    | 12.42.6   | Shoe (Plain)                                                                                                                                                                                                                                                                                                                                                                                                                              |       |       |             |                 |
| a)                                      | 12.42.6.2 | 110 mm Shoe                                                                                                                                                                                                                                                                                                                                                                                                                               | Each  | 4.00  | 131.85      | 527.40          |
| 2.03                                    | 12.43     | Providing and fixing unplasticised -PVC pipe clips of approved design to unplasticised - PVC rain water pipes by means of 50x50x50 mm hard wood plugs, screwed with M.S. screws of required length, including cutting brick work and fixing in cement mortar 1:4 (1 cement : 4 coarse sand) and making good the wall etc. complete.                                                                                                       |       |       |             |                 |
| a)                                      | 12.43.2   | 110 mm                                                                                                                                                                                                                                                                                                                                                                                                                                    | Each  | 16.00 | 371.30      | 5940.80         |
| 2.04                                    | 12.44     | Providing and fixing to the inlet mouth of rain water pipe cast iron grating 15 cm diameter and weighing not less than 440 grams.                                                                                                                                                                                                                                                                                                         | Each  | 4.00  | 54.70       | 218.80          |
|                                         |           | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                                                                                                                                                  |       |       |             | <b>21419.40</b> |
| 3.00                                    | 17.00     | <b>SANITARY INSTALLATIONS</b>                                                                                                                                                                                                                                                                                                                                                                                                             |       |       |             |                 |

| S. No. | Ref. No   | Description                                                                                                                                                                                                                                                                                                                                                                          | Unit  | Qty   | DSR 23<br>Rate | Amount (Rs.) |
|--------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|----------------|--------------|
| 1      | 2         | 3                                                                                                                                                                                                                                                                                                                                                                                    | 4     | 5     | 6.00           | 7            |
| 3.01   | 17.1      | Providing and fixing water closet squatting pan (Indian type W.C. pan ) with 100 mm sand cast Iron P or S trap, 10 litre low level white P.V.C. flushing cistern, including flush pipe, with manually controlled device (handle lever) conforming to IS : 7231, with all fittings and                                                                                                |       |       |                |              |
| a)     | 17.1.1    | White Vitreous china Orissa pattern W.C. pan of size 580x440 mm with integral type foot rests                                                                                                                                                                                                                                                                                        | Each  | 6.00  | 6767.40        | 40604.40     |
| 3.02   | 17.2      | Providing and fixing white vitreous china pedestal type water closet (European type W.C. pan) with seat and lid, 10 litre low level white P.V.C. flushing cistern, including flush pipe, with manually controlled device (handle lever), conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required. |       |       |                |              |
| a)     | 17.2.1    | W.C. pan with ISI marked white solid plastic seat and lid                                                                                                                                                                                                                                                                                                                            | Each  | 6.00  | 6515.55        | 39093.30     |
| 3.03   | 17.7      | Providing and fixing wash basin with C.I. brackets, 15 mm C.P. brass pillar taps, 32 mm C.P. brass waste of standard pattern, including painting of fittings and brackets, cutting and making good the walls wherever required.                                                                                                                                                      |       |       |                |              |
| a)     | 17.7.4    | White Vitreous China Flat back wash basin size 550x 400 mm with single 15 mm C.P. brass pillar tap                                                                                                                                                                                                                                                                                   | Each  | 6.00  | 1879.20        | 11275.20     |
| 3.04   | 17.10     | Providing and fixing Stainless Steel A ISI 304 (18/8) kitchen sink as per IS: 13983 with C.I. brackets and stainless steel plug 40 mm, including painting of fittings and brackets, cutting and making good the walls wherever required :                                                                                                                                            |       |       |                |              |
| a)     | 17.10.1   | Kitchen sink with drain board                                                                                                                                                                                                                                                                                                                                                        |       |       |                |              |
|        | 17.10.1.1 | 510x1040 mm bowl depth 250 mm                                                                                                                                                                                                                                                                                                                                                        | Each  | 6.00  | 6945.60        | 41673.60     |
| 3.05   | 17.16     | Extra for using coloured pedestal type W.C pan (European type) with low level cistern of same colour instead of white vitreous china W.C pan and cistern.                                                                                                                                                                                                                            | Each  | 6.00  | 170.70         | 1024.20      |
| 3.06   | 17.31     | Providing and fixing 600x450 mm beveled edge mirror of superior glass (of approved quality) complete with 6 mm thick hard board                                                                                                                                                                                                                                                      | Each  | 6.00  | 1607.95        | 9647.70      |
| 3.07   | 17. 34    | Providing and fixing toilet paper holder :                                                                                                                                                                                                                                                                                                                                           |       |       |                |              |
| a)     | 17.34.2   | Vitreous china                                                                                                                                                                                                                                                                                                                                                                       | Each  | 4.00  | 546.35         | 2185.40      |
| 3.08   | 17. 35    | Providing and fixing soil, waste and vent pipes :                                                                                                                                                                                                                                                                                                                                    |       |       |                |              |
| a)     | 17.35.1   | 100 mm dia.                                                                                                                                                                                                                                                                                                                                                                          |       |       |                |              |
| i)     | 17.35.1.2 | Centrifugally cast (spun) iron socket & spigot (S&S) pipe as per IS: 3989                                                                                                                                                                                                                                                                                                            | Metre | 60.00 | 1180.75        | 70845.00     |
| b)     | 17.35.2   | 75mm diameter                                                                                                                                                                                                                                                                                                                                                                        |       |       |                |              |
| i)     | 17.35.2.2 | Centrifugally cast (spun) iron socketed pipe as per IS: 3989                                                                                                                                                                                                                                                                                                                         | Metre | 25.00 | 1186.00        | 29650.00     |
| 3.09   | 17. 37    | Providing and fixing M.S. holder-bat clamps of approved design to Sand Cast iron/cast iron (spun) pipe embedded in and including cement concrete blocks 10x10x10 cm of 1:2:4 mix (1 cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size), including cost of cutting holes and making good the walls etc. :                                                          |       |       |                |              |
| a)     | 17.37.1   | For 100 mm dia. pipe                                                                                                                                                                                                                                                                                                                                                                 | Each  | 14.00 | 362.85         | 5079.90      |
| b)     | 17.37.2   | For 75 mm dia. pipe                                                                                                                                                                                                                                                                                                                                                                  | Each  | 10.00 | 360.00         | 3600.00      |
| 3.10   | 17. 38    | Providing and fixing bend of required degree with access door, insertion rubber washer 3 mm thick, bolts and nuts complete.                                                                                                                                                                                                                                                          |       |       |                |              |
| a)     | 17.38.1   | 100 mm                                                                                                                                                                                                                                                                                                                                                                               |       |       |                |              |
| i)     | 17.38.1.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                                                                                                                                                                                                                  | Each  | 10.00 | 705.20         | 7052.00      |
| b)     | 17.38.2   | 75 mm                                                                                                                                                                                                                                                                                                                                                                                |       |       |                |              |
| i)     | 17.38.2.2 | Sand cast iron S&S as per IS- 3989                                                                                                                                                                                                                                                                                                                                                   | Each  | 1.00  | 522.80         | 522.80       |
| 3.11   | 17. 39    | Providing and fixing plain bend of required degree.                                                                                                                                                                                                                                                                                                                                  |       |       |                |              |
| a)     | 17.39.1   | 100 mm                                                                                                                                                                                                                                                                                                                                                                               |       |       |                |              |
| i)     | 17.39.1.2 | Sand cast iron S&S as per IS : 3989                                                                                                                                                                                                                                                                                                                                                  | Each  | 10.00 | 570.05         | 5700.50      |
| b)     | 17.39.2   | 75 mm                                                                                                                                                                                                                                                                                                                                                                                |       |       |                |              |
| i)     | 17.39.2.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                                                                                                                                                                                                                  | Each  | 1.00  | 390.50         | 390.50       |
| 3.12   | 17. 40    | Providing and fixing heel rest sanitary bend                                                                                                                                                                                                                                                                                                                                         |       |       |                |              |
| a)     | 17.40.1   | 100 mm dia                                                                                                                                                                                                                                                                                                                                                                           |       |       |                |              |
| i)     | 17.40.1.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                                                                                                                                                                                                                  | Each  | 1.00  | 548.70         | 548.70       |

| S. No. | Ref. No   | Description                                                                                                                                                                                                                                                                                                                                  | Unit  | Qty   | DSR 23<br>Rate | Amount (Rs.) |
|--------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|----------------|--------------|
| 1      | 2         | 3                                                                                                                                                                                                                                                                                                                                            | 4     | 5     | 6.00           | 7            |
| b)     | 17.40.2   | 75 mm dia                                                                                                                                                                                                                                                                                                                                    |       |       |                |              |
| i)     | 17.40.2.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                                                                                                                                                                          | Each  | 1.00  | 504.30         | 504.30       |
| 3.13   | 17. 43    | Providing and fixing single equal plain junction of required degree with access door, insertion rubber washer 3mm thick, bolts and nuts complete.                                                                                                                                                                                            |       |       |                |              |
| a)     | 17.43.1   | 100x100x100mm                                                                                                                                                                                                                                                                                                                                |       |       |                |              |
| i)     | 17.43.1.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                                                                                                                                                                          | Each  | 10.00 | 925.70         | 9257.00      |
| b)     | 17.43.1   | 75x75x75mm                                                                                                                                                                                                                                                                                                                                   |       |       |                |              |
| i)     | 17.43.2.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                                                                                                                                                                          | Each  | 1.00  | 665.05         | 665.05       |
| 3.14   | 17. 44    | Providing and fixing single equal plain junction of required degree                                                                                                                                                                                                                                                                          |       |       |                |              |
| a)     | 17.44.1   | 100x100x100mm                                                                                                                                                                                                                                                                                                                                |       |       |                |              |
| i)     | 17.44.1.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                                                                                                                                                                          | Each  | 3.00  | 811.90         | 2435.70      |
| b)     | 17.44.2   | 75x75x75mm                                                                                                                                                                                                                                                                                                                                   |       |       |                |              |
| i)     | 17.44.2.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                                                                                                                                                                          | Each  | 1.00  | 561.20         | 561.20       |
| 3.15   | 17. 55    | Providing and fixing door piece, insertion rubber washer 3mm thick, bolts & nuts complete :                                                                                                                                                                                                                                                  |       |       |                |              |
| a)     | 17.55.1   | 100 mm                                                                                                                                                                                                                                                                                                                                       |       |       |                |              |
| i)     | 17.55.1.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                                                                                                                                                                          | Each  | 2.00  | 683.85         | 1367.70      |
| b)     | 17.55.2   | 75 mm                                                                                                                                                                                                                                                                                                                                        |       |       |                |              |
| i)     | 17.55.2.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                                                                                                                                                                          | Each  | 1.00  | 537.00         | 537.00       |
| 3.16   | 17. 56    | Providing and fixing terminal guard :                                                                                                                                                                                                                                                                                                        |       |       |                |              |
| a)     | 17.56.1   | 100 mm                                                                                                                                                                                                                                                                                                                                       |       |       |                |              |
| i)     | 17.56.1.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                                                                                                                                                                          | Each  | 10.00 | 506.00         | 5060.00      |
| b)     | 17.56.2   | 75 mm                                                                                                                                                                                                                                                                                                                                        |       |       |                |              |
| i)     | 17.56.2.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                                                                                                                                                                          | Each  | 1.00  | 404.75         | 404.75       |
| 3.17   | 17. 57    | Providing and fixing collar :                                                                                                                                                                                                                                                                                                                |       |       |                |              |
| a)     | 17.57.1   | 100 mm                                                                                                                                                                                                                                                                                                                                       |       |       |                |              |
| i)     | 17.57.1.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                                                                                                                                                                          | Each  | 10.00 | 513.15         | 5131.50      |
| b)     | 17.57.2   | 75 mm                                                                                                                                                                                                                                                                                                                                        |       |       |                |              |
| i)     | 17.57.2.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                                                                                                                                                                          | Each  | 1.00  | 362.05         | 362.05       |
| 3.18   | 17. 58    | Providing lead caulked joints to sand cast iron/centrifugally cast                                                                                                                                                                                                                                                                           |       |       |                |              |
| a)     | 17.58.1   | 100 mm                                                                                                                                                                                                                                                                                                                                       | Each  | 10.00 | 622.50         | 6225.00      |
| b)     | 17.58.2   | 75 mm                                                                                                                                                                                                                                                                                                                                        | Each  | 10.00 | 526.25         | 5262.50      |
| 3.19   | 17. 59    | Providing and fixing M.S. stays and clamps for sand cast iron/centrifugally cast (spun) iron pipes of diameter :                                                                                                                                                                                                                             |       |       |                |              |
| a)     | 17.59.1   | 100 mm                                                                                                                                                                                                                                                                                                                                       | Each  | 10.00 | 139.70         | 1397.00      |
| b)     | 17.59.2   | 75 mm                                                                                                                                                                                                                                                                                                                                        | Each  | 1.00  | 90.30          | 90.30        |
| 3.20   | 17.60     | Providing and fixing trap of self cleansing design with screwed down or hinged grating with or without vent arm complete, including cost of cutting and making good the walls and floors :                                                                                                                                                   |       |       |                |              |
| a)     | 17.60.1   | 100 mm inlet and 100 mm outlet                                                                                                                                                                                                                                                                                                               |       |       |                |              |
| i)     | 17.60.1.2 | Sand Cast Iron S&S as per IS: 1729                                                                                                                                                                                                                                                                                                           | Each  | 16.00 | 1683.55        | 26936.80     |
| 3.21   | 17.61     | Cutting chases in brick masonry walls for following diameter sand cast iron/ centrifugally cast (spun) iron pipes and making good the same with cement concrete 1:3:6 ( 1 cement : 3 coarse sand :6 graded stone aggregate 12.5 mm nominal size), including necessary plaster and pointing in cement mortar 1:4 (1 cement : 4 coarse sand) : |       |       |                |              |
| a)     | 17.61.1   | 100 mm dia                                                                                                                                                                                                                                                                                                                                   | Metre | 5.00  | 713.20         | 3566.00      |
| 3.22   | 17.65     | Painting sand cast iron/ centrifugally cast (spun) iron soil, waste vent pipes and fittings with two coats of synthetic enamel paint of any colour such as chocolate grey, or buff etc. over a coat of primer (of approved quality) for new work :                                                                                           |       |       |                |              |
| a)     | 17.65.1   | 100 mm diameter pipe                                                                                                                                                                                                                                                                                                                         | Metre | 60.00 | 82.80          | 4968.00      |
| b)     | 17.65.2   | 75 mm diameter pipe                                                                                                                                                                                                                                                                                                                          | Metre | 25.00 | 62.95          | 1573.75      |
| 3.23   | 17.69     | Providing and fixing PTMT Waste Coupling for wash basin and sink, of approved quality and colour.                                                                                                                                                                                                                                            |       |       |                |              |
| a)     | 17.69.2   | Waste coupling 38 mm dia of 83 mm length and 77mm breadth, weighing not less than 60 gms                                                                                                                                                                                                                                                     | Each  | 12.00 | 122.40         | 1468.80      |
| 3.24   | 17.70     | Providing and fixing PTMT Bottle Trap for Wash basin and sink.                                                                                                                                                                                                                                                                               |       |       |                |              |

| S. No. | Ref. No | Description                                                                                                                                                                                                                                                                                                                                                                                                                                      | Unit  | Qty   | DSR 23<br>Rate | Amount (Rs.)     |
|--------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|----------------|------------------|
| 1      | 2       | 3                                                                                                                                                                                                                                                                                                                                                                                                                                                | 4     | 5     | 6.00           | 7                |
| a)     | 17.70.1 | Bottle trap 31mm single piece moulded with height of 270 mm, effective length of tail pipe 260 mm from the centre of the waste coupling, 77 mm breadth with 25 mm minimum water seal, weighing not less than 260 gms                                                                                                                                                                                                                             | Each  | 6.00  | 367.10         | 2202.60          |
| 3.25   | 17.71   | Providing and fixing PTMT liquid soap container 109 mm wide, 125 mm high and 112 mm distance from wall of standard shape with bracket of the same materials with snap fittings of approved quality and colour, weighing not less than 105 gms.                                                                                                                                                                                                   | Each  | 6.00  | 168.35         | 1010.10          |
| 3.26   | 17.73   | Providing and fixing PTMT towel rail complete with brackets fixed to wooden cleats with CP brass screws with concealed fittings arrangement of approved quality and colour.                                                                                                                                                                                                                                                                      |       |       |                |                  |
| a)     | 17.73.2 | 600 mm long towel rail with total length of 645 mm, width 78 mm and effective height of 88 mm, weighing not less than 190 gms.                                                                                                                                                                                                                                                                                                                   | Each  | 6.00  | 708.95         | 4253.70          |
| 3.27   | 18.12   | Providing and fixing G.I. pipes complete with G.I. fittings including trenching & refilling.                                                                                                                                                                                                                                                                                                                                                     |       |       |                |                  |
|        |         | External work                                                                                                                                                                                                                                                                                                                                                                                                                                    |       |       |                |                  |
|        | 18.12.4 | 32mm dia nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                            | Metre | 25.00 | 540.30         | 13507.50         |
|        | 18.12.5 | 40mm dia nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                            | Metre | 5.00  | 617.05         | 3085.25          |
|        | 18.12.6 | 50mm dia nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                            | Metre | 3.00  | 762.15         | 2286.45          |
|        |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |       |       |                |                  |
|        |         | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                                                                                                                                                         |       |       |                | <b>373013.20</b> |
| 4.00   | 18.00   | <b>WATER SUPPLY</b>                                                                                                                                                                                                                                                                                                                                                                                                                              |       |       |                |                  |
| 4.01   | 18.7    | Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply, including all CPVC plain & brass threaded fittings, including fixing the pipe with clamps at 1.00 m spacing. This includes jointing of pipes & fittings with one step CPVC solvent cement and testing of joints complete as per direction of Engineer in Charge.                                                         |       |       |                |                  |
|        |         | <b>Internal work - Exposed on wall</b>                                                                                                                                                                                                                                                                                                                                                                                                           |       |       |                |                  |
| a)     | 18.7.3  | 25 mm nominal outer dia Pipes metre                                                                                                                                                                                                                                                                                                                                                                                                              | Metre | 25.00 | 401.55         | 10038.75         |
| b)     | 18.7.4  | 32 mm nominal outer dia Pipes metre                                                                                                                                                                                                                                                                                                                                                                                                              | Metre | 25.00 | 518.75         | 12968.75         |
| 4.02   | 18.8    | Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply, including all CPVC plain & brass threaded fittings, i/c fixing the pipe with clamps at 1.00 m spacing. This includes jointing of pipes & fittings with one step CPVC solvent cement and the cost of cutting chases and making good the same including testing of joints complete as per direction of Engineer in Charge. |       |       |                |                  |
|        |         | <b>Concealed work</b> , including cutting chases and making good the walls etc.                                                                                                                                                                                                                                                                                                                                                                  |       |       |                |                  |
| a)     | 18.8.1  | 15 mm nominal outer dia Pipes                                                                                                                                                                                                                                                                                                                                                                                                                    | Metre | 40.00 | 497.80         | 19912.00         |
| b)     | 18.8.2  | 20 mm nominal outer dia Pipes                                                                                                                                                                                                                                                                                                                                                                                                                    | Metre | 80.00 | 537.60         | 43008.00         |
| 4.03   | 18.13   | Making connection of G.I. distribution branch with G.I. main of following sizes by providing and fixing tee, including cutting and threading the pipe etc. complete.                                                                                                                                                                                                                                                                             |       |       |                |                  |
| a)     | 18.13.1 | 25 to 40 mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                         | Each  | 2.00  | 911.90         | 1823.80          |
| 4.04   | 18.16   | Providing and fixing brass stop cock of approved quality :                                                                                                                                                                                                                                                                                                                                                                                       |       |       |                |                  |
| a)     | 18.16.1 | 15 mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                               | Each  | 2.00  | 353.25         | 706.50           |
| b)     | 18.16.2 | 20 mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                               | Each  | 14.00 | 379.20         | 5308.80          |
| 4.05   | 18.17   | Providing and fixing gun metal gate valve with C.I. wheel of approved quality (screwed end) :                                                                                                                                                                                                                                                                                                                                                    |       |       |                |                  |
| a)     | 18.17.1 | 25mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                                | Each  | 10.00 | 622.40         | 6224.00          |
| b)     | 18.17.2 | 32mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                                | Each  | 1.00  | 689.60         | 689.60           |
| c)     | 18.17.3 | 40mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                                | Each  | 1.00  | 826.10         | 826.10           |
| 4.06   | 18.18   | Providing and fixing ball valve (brass) of approved quality, High or low pressure, with plastic floats complete :                                                                                                                                                                                                                                                                                                                                |       |       |                |                  |
| a)     | 18.18.3 | 25 mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                               | Each  | 4.00  | 464.05         | 1856.20          |

| S. No. | Ref. No   | Description                                                                                                                                                                                                                                                                                                 | Unit     | Qty     | DSR 23<br>Rate | Amount (Rs.)     |
|--------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|---------|----------------|------------------|
| 1      | 2         | 3                                                                                                                                                                                                                                                                                                           | 4        | 5       | 6.00           | 7                |
| 4.07   | 18.20     | Providing and fixing brass ferrule with C.I. mouth cover including boring and tapping the main :                                                                                                                                                                                                            |          |         |                |                  |
| a)     | 18.20.3   | 25 mm nominal bore                                                                                                                                                                                                                                                                                          | Each     | 2.00    | 486.80         | 973.60           |
| 4.08   | 18.21     | Providing and fixing uplasticised PVC connection pipe with brass unions :                                                                                                                                                                                                                                   |          |         |                |                  |
| a)     | 18.21.2   | 45 cm length                                                                                                                                                                                                                                                                                                |          |         |                |                  |
| i)     | 18.21.2.1 | 15 mm nominal bore                                                                                                                                                                                                                                                                                          | Each     | 8.00    | 97.75          | 782.00           |
| 4.09   | 18.22     | Providing and fixing C.P. brass shower rose with 15 or 20 mm inlet :                                                                                                                                                                                                                                        |          |         |                |                  |
| a)     | 18.22.1   | 100 mm diameter                                                                                                                                                                                                                                                                                             | Each     | 4.00    | 193.95         | 775.80           |
| 4.10   | 18.48     | Providing and placing on terrace (at all floor levels) polyethylene water storage tank, IS : 12701 marked, with cover and suitable locking arrangement and making necessary holes for inlet, outlet and overflow pipes but without fittings and the base support for tank                                   |          |         |                |                  |
| a)     | 18.48B    | Rectangular tank                                                                                                                                                                                                                                                                                            | per Lite | 2000.00 | 11.00          | 22000.00         |
| 4.11   | 18.49     | Providing and fixing C.P. brass bib cock of approved quality conforming to IS:8931 :                                                                                                                                                                                                                        |          |         |                |                  |
| a)     | 18.49.1   | 15 mm nominal bore                                                                                                                                                                                                                                                                                          | Each     | 8.00    | 506.80         | 4054.40          |
| 4.12   | 18.51     | Providing and fixing C.P. brass long body bib cock of approved quality conforming to IS standards and weighing not less than 690 gms.                                                                                                                                                                       |          |         |                |                  |
| a)     | 18.51.1   | 15 mm nominal bore                                                                                                                                                                                                                                                                                          | Each     | 8.00    | 798.95         | 6391.60          |
| 4.13   | 18.52     | Providing and fixing C.P. brass stop cock (concealed) of standard design and of approved make conforming to IS:8931.                                                                                                                                                                                        |          |         |                |                  |
| a)     | 18.52.1   | 15 mm nominal bore.                                                                                                                                                                                                                                                                                         | Each     | 8.00    | 670.45         | 5363.60          |
| 4.14   | 18.53     | Providing and fixing C.P. brass angle valve for basin mixer and geyser points of approved quality conforming to IS:8931                                                                                                                                                                                     |          |         |                |                  |
| a)     | 18.53.1   | 15 mm nominal bore                                                                                                                                                                                                                                                                                          | Each     | 8.00    | 574.30         | 4594.40          |
| 4.15   | 18.58     | Providing and fixing PTMT grating of approved quality and colour.                                                                                                                                                                                                                                           |          |         |                |                  |
| a)     | 18.58.1   | Circular type.                                                                                                                                                                                                                                                                                              |          |         |                |                  |
| i)     | 18.58.1.1 | 100 mm nominal dia.                                                                                                                                                                                                                                                                                         | Each     | 16.00   | 37.60          | 601.60           |
| 4.16   | 18.77     | Cutting holes up to 15x15 cm in R.C.C. floors and roofs for passing drain pipe etc. and repairing the hole after insertion of drain pipe etc. with cement concrete 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size), including finishing complete so as to make it leak proof | Each     | 20.00   | 452.00         | 9040.00          |
|        |           | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                    |          |         |                | <b>157939.50</b> |
| 5.00   | 19        | <b>SEWAGE &amp; DRAINAGE</b>                                                                                                                                                                                                                                                                                |          |         |                |                  |
| 5.01   | 19.1      | Providing, laying and jointing glazed stoneware pipes class SP-1 with stiff mixture of cement mortar in the proportion of 1:1 (1 cement : 1 fine sand) including testing of joints etc. complete :                                                                                                          |          |         |                |                  |
| a)     | 19.1.1    | 100 mm diameter                                                                                                                                                                                                                                                                                             | Metre    | 5.00    | 443.60         | 2218.00          |
| b)     | 19.1.2    | 150 mm diameter                                                                                                                                                                                                                                                                                             | Metre    | 20.00   | 695.80         | 13916.00         |
| 5.02   | 19.2      | Providing and laying cement concrete 1:5:10 (1 cement : 5 coarse sand : 10 graded stone aggregate 40 mm nominal size) all-round S.W. pipes including bed concrete as per standard design :                                                                                                                  |          |         |                |                  |
| a)     | 19.2.1    | 100 mm diameter S.W. pipe                                                                                                                                                                                                                                                                                   | Metre    | 5.00    | 964.75         | 4823.75          |
| b)     | 19.2.2    | 150 mm diameter S.W. pipe                                                                                                                                                                                                                                                                                   | Metre    | 20.00   | 1179.85        | 23597.00         |
| 5.03   | 19.4      | Providing and fixing square-mouth S.W. gully trap class SP-1 complete with C.I. grating brick masonry chamber with water tight C.I. cover with frame of 300 x300 mm size (inside) the weight of cover to be not less than 4.50 kg and frame to be not less than 2.70                                        |          |         |                |                  |
| a)     | 19.4.2    | 150 x 100 mm size P type                                                                                                                                                                                                                                                                                    |          |         |                |                  |

| S. No. | Ref. No  | Description                                                                                                                                                                                                                                                | Unit  | Qty   | DSR 23<br>Rate | Amount (Rs.)    |
|--------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|----------------|-----------------|
| 1      | 2        | 3                                                                                                                                                                                                                                                          | 4     | 5     | 6.00           | 7               |
| i)     | 19.4.2.1 | With common burnt clay F.P.S. (non modular) bricks of class designation 7.5                                                                                                                                                                                | Each  | 6.00  | 2734.20        | 16405.20        |
| 5.08   | 19.6     | Providing, laying and jointing non pressure NP2 class (light duty)RCC pipes with collars jointed with stiff mixture of cement mortar in the proportion of 1:2 (1 cement : 2 fine sand) including testing of joints etc. complete :                         |       |       |                |                 |
| a)     | 19.6.2   | 150 mm dia RCC pipe                                                                                                                                                                                                                                        | Metre | 20.00 | 556.45         | 11129.00        |
|        |          |                                                                                                                                                                                                                                                            |       |       |                |                 |
|        |          | <b>Total of sub-head</b>                                                                                                                                                                                                                                   |       |       |                | 72088.95        |
| 6.00   |          | <b>NON SCHEDULE ITEMS</b>                                                                                                                                                                                                                                  |       |       |                |                 |
| 6.01   | NS       | Providing and fixing floor drain points of 75 x 50mm reducer bend with 100 mm dia CP grating with frame, embedded in floor including making joints with waste pipe etc. complete in all respects as per drawing and as directed by the Engineer in Charge. | Each  | 12.00 | 1200.00        | 14400.00        |
| 6.02   | NS       | Providing & fixing Sink Mixer with Swinging Casted Spout (Wall Mounted Jaquar model CON-309 KN)/approved equal with 450mm long copper pipes & brass nuts.                                                                                                  | Each  | 1.00  | 3522.00        | 3522.00         |
| 6.03   | NS       | Providing and fixing concealed single lever bath & overhead shower mixer of hindware make and model No. (F360019CP) respectively or equivalent approved make as approved by Engineer in charge.                                                            | Each  | 4.00  | 5000.00        | 20000.00        |
|        |          |                                                                                                                                                                                                                                                            |       |       |                |                 |
|        |          | <b>Total of sub-head</b>                                                                                                                                                                                                                                   |       |       |                | <b>37922.00</b> |

**Detail estimate of “Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (UP)”**

| <b>ABSTRACT OF TYPE II</b> |                                   |                      |                   |
|----------------------------|-----------------------------------|----------------------|-------------------|
|                            |                                   |                      |                   |
|                            |                                   |                      |                   |
| <b>SUB<br/>HEAD</b>        | <b>PARTICULARS</b>                | <b>AMOUNT AS PER</b> |                   |
|                            |                                   | <b>DSR ITEMS</b>     | <b>NS ITEMS</b>   |
|                            |                                   |                      |                   |
| <b>I</b>                   | WIRING                            | 281,568.00           | 3,933.75          |
| <b>II</b>                  | SUPPLY OF FITTINGS AND FANS       | 46,936.00            | 212,849.00        |
| <b>III</b>                 | BOARDS & DISTRIBUTION BOARDS      | 33,636.00            | 39,674.39         |
| <b>IV</b>                  | EARTHING                          | 22,646.00            | -                 |
| <b>V</b>                   | LIGHTNING CONDUCTOR               | 12,656.00            | -                 |
|                            | <b>Total for (6 Nos quarters)</b> | <b>397,442.00</b>    | <b>256,457.14</b> |
|                            | <b>Total for (8 Nos quarters)</b> | <b>529,922.67</b>    | <b>341,942.85</b> |



**Detail estimate of "Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (UP)"**

**Cost Estimate of SQ TYPE II (G+1)**

**(All Amount in Rs.)**

| Sl. No. | DSR-2025 | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                  | UNIT  | QTY.   | RATE (AS PER SR) | RATE (AS PER NS) | AMOUNT (SR ITEMS) | AMOUNT (NS ITEMS) |
|---------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|------------------|------------------|-------------------|-------------------|
| 1.00    |          | <b>SUBHEAD - I - WIRING</b>                                                                                                                                                                                                                                                                                                                                  |       |        |                  |                  |                   |                   |
| 1.01    | 1.10     | Wiring for light point/ fan point/ exhaust fan point/ call bell point with 1.5 sq.mm FRLS PVC insulated copper conductor single core cable in surface / recessed medium class PVC conduit, with modular switch, modular plate, suitable GI box and earthing the point with 1.5 sq.mm FRLS PVC insulated copper conductor single core cable etc. as required. |       |        |                  |                  |                   |                   |
| a)      | 1.10.3   | Group C                                                                                                                                                                                                                                                                                                                                                      | Each  | 68.00  | 1704.00          |                  | 115872.00         | 0.00              |
| 1.02    | 1.12     | Wiring for light/ power plug with 2X4 sq. mm FRLS PVC insulated copper conductor single core cable in surface/ recessed medium class PVC conduit alongwith 1 No. 4 sq. mm FRLS PVC insulated copper conductor single core cable for loop earthing as required.                                                                                               | Metre | 93.00  | 373.00           |                  | 34689.00          | 0.00              |
| 1.03    | 1.27     | Supplying and fixing following size/ modules, GI box alongwith modular base & cover plate for modular switches in recess etc. as required.                                                                                                                                                                                                                   |       |        |                  |                  |                   |                   |
| a)      | 1.27.3   | 4 Module (125 mmX75 mm)                                                                                                                                                                                                                                                                                                                                      | Each  | 12.00  | 401.00           |                  | 4812.00           | 0.00              |
| 1.04    | 1.24     | Supplying and fixing following modular switch/ socket on the existing modular plate & switch box including connections but excluding modular plate etc. as required.                                                                                                                                                                                         |       |        |                  |                  |                   |                   |
| a)      | 1.24.3   | 15/16 A switch                                                                                                                                                                                                                                                                                                                                               | Each  | 12.00  | 176.00           |                  | 2112.00           | 0.00              |
| b)      | 1.24.4   | 3 pin 5/6 A socket outlet                                                                                                                                                                                                                                                                                                                                    | Each  | 20.00  | 136.00           |                  | 2720.00           | 0.00              |
| c)      | 1.24.6   | Telephone socket outlet                                                                                                                                                                                                                                                                                                                                      | Each  | 6.00   | 168.00           |                  | 1008.00           | 0.00              |
| d)      | 1.24.7   | TV antenna socket outlet                                                                                                                                                                                                                                                                                                                                     | Each  | 18.00  | 168.00           |                  | 3024.00           | 0.00              |
| 1.05    | 1.7      | Wiring for circuit/ submain wiring alongwith earth wire with the following sizes of FRLS PVC insulated copper conductor, single core cable in surface/ recessed steel conduit as required.                                                                                                                                                                   |       |        |                  |                  |                   |                   |
| (a)     | 1.7.2    | 2 x 2.5 sq.mm + 1 x 2.5 sq.mm earth wire                                                                                                                                                                                                                                                                                                                     | Metre | 100.00 | 414.00           |                  | 41400.00          | 0.00              |
| (b)     | 1.7.5    | <b>2 X 10 sq. mm + 1 X 6 sq. mm earth wire</b>                                                                                                                                                                                                                                                                                                               | Metre | 28.00  | 778.00           |                  | 21784.00          | 0.00              |
| 1.06    | 1.19     | Supplying and drawing co-axial TV cable RG-6 grade, 0.7 mm solid copper conductor PE insulated, shielded with fine tinned copper braid and protected with PVC sheath in the existing surface/ recessed steel/ PVC conduit as required.                                                                                                                       | Metre | 280.00 | 54.00            |                  | 15120.00          | 0.00              |
| 1.07    | 1.20     | Supplying and fixing of following sizes of steel conduit along with accessories in surface/recess including painting in case of surface conduit, or cutting the wall and making good the same in case of recessed conduit as required.                                                                                                                       |       |        |                  |                  |                   |                   |
| a)      | 1.20.2   | 25 mm                                                                                                                                                                                                                                                                                                                                                        | Metre | 80.00  | 289.00           |                  | 23120.00          | 0.00              |
| 1.08    | 1.27     | Supplying and fixing following size/ modules, GI box alongwith modular base & cover plate for modular switches in recess etc. as required.                                                                                                                                                                                                                   |       |        |                  |                  |                   |                   |
| a)      | 1.27.1   | 1 or 2 Module (75 mmX75 mm)                                                                                                                                                                                                                                                                                                                                  | Each  | 18.00  | 354.00           |                  | 6372.00           | 0.00              |
| 1.09    | 1.18     | Supplying and drawing following pair 0.5 mm dia FRLS PVC insulated annealed copper conductor, unarmored telephone cable in the existing surface/ recessed steel/ PVC conduit as required.                                                                                                                                                                    |       |        |                  |                  |                   |                   |
| a)      | 1.18.2   | 2 Pair                                                                                                                                                                                                                                                                                                                                                       | Metre | 40.00  | 39.00            |                  | 1560.00           | 0.00              |
| 1.10    | 1.21     | Supplying and fixing of following sizes of medium class PVC conduit along with accessories in surface/recess including cutting the wall and making good the same in case of recessed conduit as required.                                                                                                                                                    |       |        |                  |                  |                   |                   |
| a)      | 1.21.1   | 20 mm                                                                                                                                                                                                                                                                                                                                                        | Metre | 25.00  | 151.00           |                  | 3775.00           | 0.00              |
| b)      | 1.21.2   | 25 mm                                                                                                                                                                                                                                                                                                                                                        | Metre | 25.00  | 168.00           |                  | 4200.00           | 0.00              |
| 1.11    | M. R     | Providing and fixing in position 2mm thick M.S. Telephone junction box of size suitable for fixing of following Krone Tag Block with key lock arrangement. Also provide clamps for fixing tag blocks.                                                                                                                                                        |       |        |                  |                  |                   |                   |
| a)      | a)       | 10 pair Telephone Tag Block with box                                                                                                                                                                                                                                                                                                                         | Each  | 1.00   |                  | 496.55           | 0.00              | 496.55            |
| 1.12    | M. R     | Supplying, laying of 10 pair unarmoured PVC insulated copper conductor (ATC) telephone cable in ground/existing pipes/on wall and making connection with telephone main junction box (MDF) including supports and all accessories as required.                                                                                                               |       |        |                  |                  |                   |                   |
| a)      | a)       | 10 Pair Cable unarmoured                                                                                                                                                                                                                                                                                                                                     | Metre | 20.00  |                  | 171.86           | 0.00              | 3437.20           |

| Sl. No. | DSR-2025 | DESCRIPTION                                                                                                                                                                                                                                                                                                              | UNIT | QTY.  | RATE (AS PER SR) | RATE (AS PER NS) | AMOUNT (SR ITEMS) | AMOUNT (NS ITEMS) |
|---------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------|------------------|------------------|-------------------|-------------------|
|         |          | <b>TOTAL OF SUBHEAD - 1</b>                                                                                                                                                                                                                                                                                              |      |       |                  |                  | <b>281568.00</b>  | <b>3933.75</b>    |
| 2.00    |          | <b>SUBHEAD - II - SUPPLY &amp; INSTALLATION OF FITTINGS</b>                                                                                                                                                                                                                                                              |      |       |                  |                  |                   |                   |
| 2.01    | M.R.     | Supplying of following box type FI. fitting made out of CRCA sheet finished in anti-rust treated non-yellowing super white stove enamelled paint duly wired with copper wound heavy duty choke starter holder, starter but without lamp complete etc. as reqd.                                                           |      |       |                  |                  |                   |                   |
| a)      |          | Mounting rail for TLED lamps 1600 Lumens (TMC 501 P 1xT-LED with Essential LED 18W Tube)                                                                                                                                                                                                                                 | Each | 24.00 |                  | 585.35           | 0.00              | 14048.40          |
| 2.02    | M.R.     | Supplying of wall bracket light fittings suitable for 11 / 13 W CFL lamp. The fitting shall be made up of M.S. powder coated provided with integral ballast, frosted glass and 1 no. 11 / 13 W lamp duly wired upto the connector block complete as required. (Decon Cat. No.05AAM)                                      | Each | 48.00 |                  | 1170.80          | 0.00              | 56198.40          |
| 2.03    | M.R.     | Supplying of ceiling light fittings suitable for 1 x 15/20 W LED lamp. The fitting shall be made up of M.S. powder coated provided with electronic ballast, 1 no. 15/20 W LED lamp duly wired upto the connector block etc. complete as required.                                                                        |      |       |                  |                  |                   |                   |
| a)      |          | Cirrus Mini Pro 15 / 20 watt & 1100 /1600 Lumens (Philips SM200C LED11S 6500 PSU OD WH)                                                                                                                                                                                                                                  | Each | 24.00 |                  | 2868.45          | 0.00              | 68842.80          |
| 2.04    | M.R.     | Supplying of bulk head fittings suitable for 10 W LED lamp complete with ballast & accessories such as glass, wire guard, 60 W CFL lamp etc. complete as required.                                                                                                                                                       |      |       |                  |                  |                   |                   |
| a)      |          | Endural LED-Bulkhead, 10 W, 600 lumen Such as (Philips WT202W LED6S CW PSU S2 PC)                                                                                                                                                                                                                                        | Each | 4.00  |                  | 1697.60          | 0.00              | 6790.40           |
| 2.05    | M.R.     | Supplying of exhaust fan, all complete with mounting ring frame i/c bracket, but without regulator with shutters in the following sizes. (G.E. ALSTHOM, KHAITAN & HAVELL'S COMPANY)                                                                                                                                      |      |       |                  |                  |                   |                   |
| a)      |          | 300 mm 4 Pole                                                                                                                                                                                                                                                                                                            | Each | 18.00 |                  | 1639.10          | 0.00              | 29503.80          |
| 2.06    | M. R     | Supplying of 1400 mm sweep A.C. electric Ceiling fans, capacitor type with double ball bearing complete with 300 mm down rod, canopies, shackles, blades, but without regulator suitable for operation on 230 / 240 Volts, 50 Hz, single phase, A.C. supply. (CROMPTON, KHAITAN & HAVELL'S COMPANY)                      | Each | 18.00 |                  | 2081.40          | 0.00              | 37465.20          |
| 2.07    | 1.25     | Supplying and fixing two module stepped type electronic fan regulator on the existing modular plate switch box including connections but excluding modular plate etc. as required.                                                                                                                                       | Each | 18.00 | 402.00           |                  | 7236.00           | 0.00              |
| 2.08    | 1.45     | Installation, testing and commissioning of ceiling fan, including wiring the down rods of standard length (upto 30 cm) with 1.5 sq. mm FRLS PVC insulated, copper conductor, single core cable, including providing and fixing phenolic laminated sheet cover on the fan box etc. as required.                           | Each | 18.00 | 332.00           |                  | 5976.00           | 0.00              |
| 2.09    | 1.41     | Installation, testing and commissioning of pre-wired, light fixture / compact fluorescent fitting of all types, complete with all accessories and tube/lamp etc. directly on ceiling/ wall, including connections with 1.5 sq. mm FRLS PVC insulated, copper conductor, single core cable and earthing etc. as required. | Each | 24.00 | 259.00           |                  | 6216.00           | 0.00              |
| 2.10    | 1.50     | Installation of exhaust fan in the existing opening, including making good the damage, connection, testing, commissioning etc. as required.                                                                                                                                                                              |      |       |                  |                  |                   |                   |
| a)      | 1.50.1   | Upto 450 mm sweep                                                                                                                                                                                                                                                                                                        | Each | 18.00 | 556.00           |                  | 10008.00          | 0.00              |
| 2.11    | 1.51     | Extra for fixing the louvers/ shutters complete with frame for a exhaust fan of all sizes.                                                                                                                                                                                                                               | Each | 18.00 | 260.00           |                  | 4680.00           | 0.00              |
| 2.12    | 1.35     | Installation, testing and commissioning of wall bracket /ceiling fittings of all sizes and shapes containing upto two GLS/CFL/ LED lamps per fitting, complete with all accessories including connections etc. as required.                                                                                              | Each | 76.00 | 151.00           |                  | 11476.00          | 0.00              |
| 2.13    | 1.38     | Supplying and fixing call bell/ buzzer suitable for single phase, 230 V, complete as required.                                                                                                                                                                                                                           | Each | 12.00 | 112.00           |                  | 1344.00           | 0.00              |
|         |          | <b>TOTAL OF SUBHEAD - II.</b>                                                                                                                                                                                                                                                                                            |      |       |                  |                  | <b>46936.00</b>   | <b>212849.00</b>  |
| 3.00    |          | <b>SUBHEAD - III - DISTRIBUTION BOARD</b>                                                                                                                                                                                                                                                                                |      |       |                  |                  |                   |                   |
| 3.01    | M.R.     | Supplying, installing, testing and commissioning of compartmentalised cubical type meter board for installation of single phase meter. The cubical board shall be made of 2mm thick C.R.C.A sheet, duly phosphatised powder coated complete with connection bus bar and following accessories mounted in it.             |      |       |                  |                  |                   |                   |

| Sl. No. | DSR-2025 | DESCRIPTION                                                                                                                                                                                                                                                                                                  | UNIT  | QTY.  | RATE (AS PER SR) | RATE (AS PER NS) | AMOUNT (SR ITEMS) | AMOUNT (NS ITEMS) |
|---------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|------------------|------------------|-------------------|-------------------|
|         |          | METER BOARD                                                                                                                                                                                                                                                                                                  |       |       |                  |                  |                   |                   |
|         |          | INCOMING :                                                                                                                                                                                                                                                                                                   |       |       |                  |                  |                   |                   |
|         |          | 40A TP MCCB having breaking capacity - 25 KA - 1 No.                                                                                                                                                                                                                                                         |       |       |                  |                  |                   |                   |
|         |          | OUTGOING :                                                                                                                                                                                                                                                                                                   |       |       |                  |                  |                   |                   |
|         |          | Space for Single phase energy meter - 4 Nos.                                                                                                                                                                                                                                                                 |       |       |                  |                  |                   |                   |
|         |          | 25 Amp DP MCB - 4 Nos.                                                                                                                                                                                                                                                                                       | Set   | 1.00  |                  | 27474.35         | 0.00              | 27474.35          |
| 3.02    | M.R.     | Supplying, installing, testing & commissioning of Single Phase Electronic Energy Meter, tested as per Electricity Boards requirement.                                                                                                                                                                        | Set   | 4.00  |                  | 2369.51          | 0.00              | 9478.04           |
| 3.03    | 2.3      | Supplying and fixing following way, single pole and neutral, sheet steel, MCB distribution board, 240 V, on surface/ recess, complete with tinned copper bus bar, neutral bus bar, earth bar, din bar, interconnections, powder painted including earthing etc. as required. (But without MCB/RCCB/Isolator) |       |       |                  |                  |                   |                   |
| a)      | 2.3.3    | 12 way, SPN                                                                                                                                                                                                                                                                                                  | Each  | 4.00  | 2871.00          |                  | 11484.00          | 0.00              |
| 3.04    | 2.12     | Supplying and fixing following rating, double pole, 240 V, isolator in the existing MCB DB complete with connections, testing and commissioning etc. as required.                                                                                                                                            |       |       |                  |                  |                   |                   |
| a)      | 2.12.1   | 40 amps                                                                                                                                                                                                                                                                                                      | Each  | 4.00  | 472.00           |                  | 1888.00           | 0.00              |
| 3.05    | 2.14     | Supplying and fixing following rating, double pole, (single phase and neutral), 240 V, residual current circuit breaker (RCCB), having a sensitivity current 30 mA in the existing MCB DB complete with connections, testing and commissioning etc. as required                                              |       |       |                  |                  |                   |                   |
| (b)     | 2.14.1   | 25 amps                                                                                                                                                                                                                                                                                                      | Each  | 4.00  | 2141.00          |                  | 8564.00           | 0.00              |
| 3.06    | M.R.     | Supplying of XLPE insulated, PVC sheathed 1.1 KV grade Aluminium conductor heavy duty armoured cable as per IS : 7098 of size :                                                                                                                                                                              |       |       |                  |                  |                   |                   |
| a)      | a)       | 4 x 16 sq.mm.                                                                                                                                                                                                                                                                                                | Metre | 25.00 |                  | 108.88           | 0.00              | 2722.00           |
| 3.07    | 15.14    | Providing, laying and fixing following dia RCC pipe NP2 class (light duty) in ground complete with RCC collars, jointing with cement mortar 1:2 (1 cement : 2 fine sand) including trenching (75 cm deep) and refilling etc. as required for crossing road/walls                                             |       |       |                  |                  |                   |                   |
| a)      | 15.14.1  | 100 mm dia                                                                                                                                                                                                                                                                                                   | Metre | 10.00 | 771.00           |                  | 7710.00           | 0.00              |
| 3.08    | 2.10     | Supplying and fixing 5 A to 32 A rating, 240/415 V, 10 kA, "C" curve, miniature circuit breaker suitable for inductive load of following poles in the existing MCB DB complete with connections, testing and commissioning etc. as required                                                                  |       |       |                  |                  |                   |                   |
| a)      | 2.10.1   | Single pole                                                                                                                                                                                                                                                                                                  | Each  | 14.00 | 285.00           |                  | 3990.00           | 0.00              |
|         |          | <b>TOTAL OF SUBHEAD - III.</b>                                                                                                                                                                                                                                                                               |       |       |                  |                  | <b>33636.00</b>   | <b>39674.39</b>   |
| 4.00    |          | <b>SUBHEAD - IV - EARTHING</b>                                                                                                                                                                                                                                                                               |       |       |                  |                  |                   |                   |
| 4.01    | 5.2      | Earthing with G.I. earth pipe 4.5 meter long, 40 mm dia including accessories, and providing masonry enclosure with cover plate having locking arrangement and watering pipe etc. with charcoal/ coke and salt as required                                                                                   | Each  | 2.00  | 7658.00          |                  | 15316.00          | 0.00              |
| 4.02    | 5.12     | Providing and laying earth connection from earth electrode with 6 SWG dia G.I. Wire in 15 mm dia G.I. pipe from earth electrode including connection with G.I. thimble excavation and re-filling as required.                                                                                                | Metre | 10.00 | 313.00           |                  | 3130.00           | 0.00              |
| 4.03    | 5.16     | Providing and fixing 6 SWG dia G.I. wire on surface or in recess for loop earthing as required.                                                                                                                                                                                                              | Metre | 50.00 | 84.00            |                  | 4200.00           | 0.00              |
|         |          | <b>TOTAL OF SUBHEAD - IV</b>                                                                                                                                                                                                                                                                                 |       |       |                  |                  | <b>22646.00</b>   | <b>0.00</b>       |
| 5.00    | 6.00     | <b>SUBHEAD - V- LIGHTNING CONDUCTOR</b>                                                                                                                                                                                                                                                                      |       |       |                  |                  |                   |                   |
| 5.01    | 6.1      | Providing and fixing of lightning conductor finial, made of 25 mm dia 300 mm long, G.I. tube, having single prong at top, with 85 mm dia 6 mm thick G.I. base plate including holes etc. complete as required                                                                                                | Each  | 2.00  | 609.00           |                  | 1218.00           | 0.00              |
| 5.02    | 6.3      | Jointing copper / G.I. tape (with another copper/ G I tape, base of the finial or any other metallic object) by riveting / nut bolting/ sweating and soldering etc as required.                                                                                                                              | Each  | 4.00  | 139.00           |                  | 556.00            | 0.00              |
| 5.03    | 6.8      | Fixing of copper/ G.I. tape 20 mm X 3 mm thick on parapet or surface of wall for lightning conductor complete as required.(For horizontal run)                                                                                                                                                               | Rm    | 26.00 | 100.00           |                  | 2600.00           | 0.00              |
| 5.04    | 6.9      | Fixing of copper/ G.I. tape 20 mm X 3 mm thick on parapet or surface of wall for lightning conductor complete as required.(For vertical run)                                                                                                                                                                 | Rm    | 26.00 | 201.00           |                  | 5226.00           | 0.00              |

| Sl. No. | DSR-2025 | DESCRIPTION                                                                                                                                                                       | UNIT | QTY.  | RATE (AS PER SR) | RATE (AS PER NS) | AMOUNT (SR ITEMS) | AMOUNT (NS ITEMS) |
|---------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------|------------------|------------------|-------------------|-------------------|
| 5.05    | 6.10     | Providing and fixing testing joint, made of 20 mm X 3 mm thick G.I. strip, 125 mm long, with 4 nos. of G.I. bolts, nuts, chuck nuts and spring washers etc. complete as required. | Each | 4.00  | 140.00           |                  | 560.00            | 0.00              |
| 5.06    | 6.12     | Laying copper/ G.I. tape 32 mm X 6 mm from earth electrode directly in ground as required                                                                                         | Rm   | 26.00 | 96.00            |                  | 2496.00           | 0.00              |
|         |          |                                                                                                                                                                                   |      |       |                  |                  |                   |                   |
|         |          | <b>TOTAL OF SUBHEAD - V</b>                                                                                                                                                       |      |       |                  |                  | <b>12656.00</b>   | <b>0.00</b>       |
|         |          | <b>TOTAL (I TO IV)</b>                                                                                                                                                            |      |       |                  |                  | <b>397442.00</b>  | <b>256457.14</b>  |
|         |          | <b>G. TOTAL (I TO IV)</b>                                                                                                                                                         |      |       |                  |                  |                   | <b>653899.14</b>  |

**Detail estimate of “Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (UP)”**

**GUEST HOUSE**

**SUMMARY OF COST (CIVIL WORK)**

| <b>S. No.</b> | <b>Description</b>         | <b>Amount (Rs.)</b> |
|---------------|----------------------------|---------------------|
| 1             | EARTH WORK                 | 65,725.31           |
| 2             | CONCRETE WORK              | 101,220.03          |
| 3             | REINFORCED CEMENT CONCRETE | 1,544,174.41        |
| 4             | BRICK WORK                 | 429,035.47          |
| 5             | MARBLE WORK                | 12,422.22           |
| 6             | WOOD WORK & PVC WORK       | 431,012.73          |
| 7             | STEEL WORK                 | 27,790.79           |
| 8             | FLOORING                   | 226,357.16          |
| 9             | ROOFING                    | 1,193.00            |
| 10            | FINISHING                  | 561,913.98          |
| 11            | WATER PROOFING             | 177,947.35          |
|               | <b>Sub Total</b>           | <b>3,578,792.44</b> |
|               |                            |                     |
|               |                            |                     |
|               |                            |                     |

**Detail estimate of "Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (UP)"**

**GUEST HOUSE  
ABSTRACT OF COST (CIVIL WORKS)**

| S. No.     | Ref. No  | Description                                                                                                                                                                                                                                                                                                                                                                                          | Unit  | Quantity | DSR 23 Rate | Amount (Rs.)      |
|------------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------|-------------|-------------------|
| 1          | 2        | 3                                                                                                                                                                                                                                                                                                                                                                                                    | 4     | 8        | 9           | 10                |
| <b>1.0</b> | <b>2</b> | <b>EARTH WORK</b>                                                                                                                                                                                                                                                                                                                                                                                    |       |          |             |                   |
| 1.01       | 2.8      | Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan), including dressing of sides and ramming of bottoms, lift upto 1.5 m, including getting out the excavated soil and disposal of surplus excavated soil as directed, within a lead of 50 m.                                        |       |          |             | -                 |
| a)         | 2.8.1    | All kinds of soil                                                                                                                                                                                                                                                                                                                                                                                    | Cum   | 140.71   | 260.30      | 36,625.94         |
|            |          |                                                                                                                                                                                                                                                                                                                                                                                                      |       |          |             | -                 |
| 1.02       | 2.25     | Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20cm in depth, consolidating each deposited layer by ramming and watering, lead up to 50 m and lift upto 1.5 m.                                                                                                                                                            | Cum   | 148.47   | 196.00      | 29,099.37         |
|            |          |                                                                                                                                                                                                                                                                                                                                                                                                      |       |          |             | -                 |
|            |          | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                                                                                                             |       |          |             | <b>65,725.31</b>  |
| <b>2.0</b> | <b>4</b> | <b>CONCRETE WORK</b>                                                                                                                                                                                                                                                                                                                                                                                 |       |          |             |                   |
| 2.01       | 4.1      | Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level :                                                                                                                                                                                                                                                   |       |          |             | -                 |
| a)         | 4.1.10   | 1:5:10 (1 Cement : 5 coarse sand (zone-III) : 10 graded stone aggregate 40 mm nominal size)                                                                                                                                                                                                                                                                                                          | Cum   | 12.49    | 6,518.60    | 81,402.24         |
|            |          |                                                                                                                                                                                                                                                                                                                                                                                                      |       |          |             | -                 |
| 2.02       | 4.2      | Providing and laying cement concrete in retaining walls, return walls, walls (any thickness) including attached pilasters, columns, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, coping, bed blocks, anchor blocks, plain window sills, fillets, sunken floor etc., up to floor five level, excluding the cost of centering, shuttering and finishing : |       |          |             |                   |
| a)         | 4.2.3    | 1:2:4 (1 Cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size).                                                                                                                                                                                                                                                                                                                      | Cum   | 0.14     | 9895.20     | 1340.05           |
|            |          |                                                                                                                                                                                                                                                                                                                                                                                                      |       |          |             |                   |
| 2.03       | 4.17     | Making plinth protection 50mm thick of cement concrete 1:3:6 (1 cement : 3 coarse sand : 6 graded stone aggregate 20 mm nominal size) over 75mm thick bed of dry brick ballast 40 mm nominal size, well rammed and consolidated and grouted with fine sand, including necessary excavation, levelling & dressing & finishing the top smooth.                                                         | Sqm   | 24.66    | 749.30      | 18,477.74         |
|            |          |                                                                                                                                                                                                                                                                                                                                                                                                      |       |          |             |                   |
|            |          | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                                                                                                             |       |          |             | <b>101,220.03</b> |
| <b>3.0</b> | <b>5</b> | <b>REINFORCED CEMENT CONCRETE</b>                                                                                                                                                                                                                                                                                                                                                                    |       |          |             |                   |
| 3.01       | 5.9      | Centering and shuttering including strutting, propping etc. and removal of form for all heights:                                                                                                                                                                                                                                                                                                     |       |          |             | -                 |
| a)         | 5.9.1    | Foundations, footings, bases of columns, etc. for mass concrete                                                                                                                                                                                                                                                                                                                                      | Sqm   | 26.48    | 392.15      | 10,383.64         |
| b)         | 5.9.6    | Columns, Pillars, Piers, Abutments, Posts and Struts                                                                                                                                                                                                                                                                                                                                                 | Sqm   | 93.38    | 961.30      | 89,761.39         |
| c)         | 5.9.15   | Small lintels not exceeding 1.5 m clear span, moulding as in cornices, window sills, string courses, bands, copings, bed plates, anchor blocks and the like                                                                                                                                                                                                                                          | Sqm   | 1.18     | 392.15      | 461.80            |
| d)         | 5.9.16   | Edges of slabs and breaks in floors and walls                                                                                                                                                                                                                                                                                                                                                        |       |          |             |                   |
| e)         | 5.9.16.1 | Under 20 cms wide                                                                                                                                                                                                                                                                                                                                                                                    | Metre | 32.00    | 208.55      | 6,673.60          |
| f)         | 5.9.3    | Suspended floors, roofs, landings, balconies and access platform.                                                                                                                                                                                                                                                                                                                                    | Sqm   | 145.72   | 927.25      | 135,121.28        |
| g)         | 5.9.5    | Lintels, beams, plinth beams, girders, bressumers and cantilevers.                                                                                                                                                                                                                                                                                                                                   | Sqm   | 169.00   | 736.40      | 124,451.60        |
|            |          |                                                                                                                                                                                                                                                                                                                                                                                                      |       |          |             | -                 |

| S. No.     | Ref. No  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Unit     | Quantity | DSR 23 Rate | Amount (Rs.)        |
|------------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|-------------|---------------------|
| 3.02       | 5.22     | Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth level.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |          |             | -                   |
| a)         | 5.22.6   | Thermo-Mechanically Treated bars of grade Fe-500D or more.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | kilogram | 6,017.00 | 107.85      | 648,933.45          |
|            |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |          |             | -                   |
| 3.03       | 5.30     | Add for plaster drip course/ groove in plastered surface or moulding to R.C.C. projections.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Metre    | 7.45     | 78.40       | 584.08              |
|            |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |          |             |                     |
| 3.04       | 5.33     | Providing and laying in position machine batched and machine mixed design mix M-25 grade cement concrete for reinforced cement concrete work, using cement content as per approved design mix, including pumping of concrete to site of laying but excluding the cost of centering, shuttering, finishing and reinforcement, including admixtures in recommended proportions as per IS: 9103 to accelerate, retard setting of concrete, improve workability without impairing strength and durability as per direction of Engineer-in-charge. (Note :- Cement content considered in this item is @ 330 kg/cum. "Excess/ less cement used as per design mix is payable/recoverable separately). |          |          |             |                     |
| (i)        | 5.33.1   | All works upto plinth level                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Cum      | 22.62    | 9,504.75    | 215,022.34          |
| (ii)       | 5.33.2   | All works above plinth level upto floor V level                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Cum      | 31.72    | 9,860.40    | 312,781.23          |
|            |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |          |             |                     |
|            |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |          |             |                     |
|            |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |          |             |                     |
|            |          | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |          |          |             | <b>1,544,174.41</b> |
|            |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |          |             |                     |
| <b>4.0</b> | <b>6</b> | <b>BRICK WORK</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |          |          |             |                     |
| 4.01       | 6.1      | Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in foundation and plinth in:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |          |          |             |                     |
| a)         | 6.1.2    | Cement mortar 1:6 (1 cement : 6 coarse sand)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Cum      | 11.39    | 7,132.25    | 81,247.53           |
|            |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |          |             |                     |
| 4.02       | 6.47     | Providing and laying autoclaved aerated cement blocks masonry with 150mm/230mm/300 mm thick AAC blocks in super structure above plinth level up to floor V level with RCC band at sill level and lintel level with approved block laying polymer modified adhesive mortar all complete as per direction of Engineer-in-Charge. (The payment of RCC band and reinforcement shall be made for separately)                                                                                                                                                                                                                                                                                        | Cum      | 29.12    | 8,333.65    | 242,693.72          |
|            |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |          |             | -                   |
| 4.03       | 6.13     | Half brick masonry with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in superstructure above plinth level up to floor V level.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |          |          |             |                     |
| a)         | 6.13.2   | Cement mortar 1:4 (1 cement : 4 coarse sand)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Sqm      | 83.94    | 1,123.80    | 94,335.14           |
|            |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |          |             |                     |
| 4.04       | 6.15     | Extra for providing and placing in position 2 Nos 6mm dia. M.S. bars at every third course of half brick masonry.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Sqm      | 83.94    | 104.80      | 8,797.23            |
|            |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |          |             |                     |
| 4.05       | 6.44     | Brick edging 7cm wide 11.4 cm deep to plinth protection with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 including grouting with cement mortar 1:4 (1 cement : 4 fine sand).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Metre    | 33.00    | 59.45       | 1,961.85            |
|            |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |          |             |                     |
|            |          | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |          |          |             | <b>429,035.47</b>   |
|            |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |          |             |                     |
| <b>5.0</b> | <b>8</b> | <b>MARBLE WORK</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |          |          |             |                     |
|            |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |          |             |                     |
| 5.01       | 8.2      | Providing and fixing 18 mm thick gang saw cut, mirror polished, premoulded and prepolished, machine cut for kitchen platforms, vanity counters, window sills, facias and similar locations of required size, approved shade, colour and texture laid over 20 mm thick base cement mortar 1:4 (1 cement : 4 coarse sand), joints treated with white cement, mixed with matching pigment, epoxy touch ups, including rubbing, curing, moulding and polishing to edges to give high gloss finish etc. complete at all levels.                                                                                                                                                                     |          |          |             |                     |
| a)         | 8.2.2    | Granite of any colour and shade                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |          |             |                     |
| (i)        | 8.2.2.2  | Area of slab over 0.50 sqm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Sqm      | 1.65     | 5,136.30    | 8,474.90            |
|            |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |          |             | -                   |
| 5.02       | 8.3      | Providing edge moulding to 18 mm thick marble stone counters, Vanities etc., including machine polishing to edge to give high gloss finish etc. complete as per design approved by Engineer-in-Charge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |          |          |             | -                   |
| a)         | 8.3.2    | Granite work                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Metre    | 2.75     | 510.95      | 1,405.11            |
|            |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |          |             | -                   |

| S. No.     | Ref. No    | Description                                                                                                                                                                                                                                                                                              | Unit  | Quantity | DSR 23 Rate | Amount (Rs.)     |
|------------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------|-------------|------------------|
| 5.03       | 8.4        | Extra for fixing marble /granite stone, over and above corresponding basic item, in facia and drops of width upto 150 mm with epoxy resin based adhesive, including cleaning etc. complete.                                                                                                              | Metre | 2.75     | 568.55      | 1,563.51         |
| 5.04       | 8.5        | Extra for providing opening of required size & shape for wash basin/ kitchen sink in kitchen platform, vanity counter and similar location in marble/ Granite/ stone work, including necessary holes for pillar taps etc. including moulding, rubbing and polishing of cut edges etc. complete.          | Each  | 1.00     | 978.70      | 978.70           |
|            |            | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                 |       |          |             | <b>12,422.22</b> |
| <b>6.0</b> | <b>9</b>   | <b>WOOD WORK &amp; PVC WORK</b>                                                                                                                                                                                                                                                                          |       |          |             |                  |
| 6.01       | 9.1        | Providing wood work in frames of doors, windows, clerestory windows and other frames, wrought framed and fixed in position with hold fast lugs or with dash fasteners of required dia & length ( hold fast lugs or dash fastener shall be paid for separately).                                          |       |          |             |                  |
| a)         | 9.1.1      | Second class teak wood                                                                                                                                                                                                                                                                                   | Cum   | 0.20     | 142,949.70  | 28,304.04        |
| 6.02       | 9.12       | Extra for providing frosted glass panes 4 mm thick instead of ordinary float glass panes 4 mm thick in doors, windows and clerestory window shutters. (Area of opening for glass panes excluding portion inside rebate shall be measured).                                                               | Sqm   | 4.00     | 176.40      | 705.60           |
| 6.03       | 9.20       | Providing and fixing ISI marked flush door shutters conforming to IS : 2202 (Part I) decorative type, core of block board construction with frame of 1st class hard wood and well matched teak 3 ply veneering with vertical grains or cross bands and face veneers on both faces of shutters.           |       |          |             | -                |
| a)         | 9.20.3     | 25 mm thick (for cupboard) including ISI marked nickel plated bright finished M.S. Piano hinges IS : 3818 marked with necessary screws                                                                                                                                                                   | Sqm   | 10.08    | 2,819.25    | 28,418.04        |
| 6.04       | 9.21       | Providing and fixing ISI marked flush door shutters conforming to IS : 2202 (Part I) non-decorative type, core of block board construction with frame of 1st class hard wood and well matched commercial 3 ply veneering with vertical grains or cross bands and face veneers on both faces of shutters. |       |          |             |                  |
| a)         | 9.21.1     | 35 mm thick including ISI marked Stainless Steel butt hinges with necessary screws                                                                                                                                                                                                                       | Sqm   | 16.50    | 2,392.65    | 39,478.73        |
| 6.05       | 9.23       | Extra for providing lipping with 2nd class teak wood battens 25 mm minimum depth on all edges of flush door shutters (over all area of door shutter to be measured).                                                                                                                                     | Sqm   | 26.58    | 462.35      | 12,289.26        |
| 6.06       | 9.27       | Providing and fixing wire gauge shutters using galvanized M.S. wire gauge of average width of aperture 1.4 mm in both directions with wire of dia 0.63 mm, for doors, windows and clerestory windows with hinges and necessary screws :                                                                  |       |          |             |                  |
| i)         | 9.27.1     | 35 mm thick shutters                                                                                                                                                                                                                                                                                     |       |          |             |                  |
| a)         | 9.27.1.1.2 | Kiln seasoned and chemically treated hollock wood                                                                                                                                                                                                                                                        | Sqm   | 8.40     | 3,599.20    | 30,233.28        |
| 6.07       | 9.48       | Providing and fixing M.S. grills of required pattern in frames of windows etc. with M.S. flats, square or round bars etc. including priming coat with approved steel primer all complete.                                                                                                                |       |          |             | -                |
| a)         | 9.48.1     | Fixed to steel windows by welding                                                                                                                                                                                                                                                                        | Kg    | 224.55   | 219.10      | 49,198.91        |
| 6.10       | 9.96       | Providing and fixing aluminium sliding door bolts, ISI marked anodised (anodic coating not less than grade AC 10 as per IS : 1868), transparent or dyed to required colour or shade with nuts and screws etc. complete :                                                                                 |       |          |             |                  |
| a)         | 9.96.2     | 250x16 mm                                                                                                                                                                                                                                                                                                | Each  | 8.00     | 260.60      | 2,084.80         |
| 6.11       | 9.97       | Providing and fixing aluminium tower bolts, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868 ) transparent or dyed to required colour or shade with necessary screws etc. complete :                                                                                      |       |          |             |                  |
| a)         | 9.97.3     | 200x10 mm                                                                                                                                                                                                                                                                                                | Each  | 8.00     | 99.70       | 797.60           |
| 6.12       | 9.1        | Providing and fixing aluminium handles, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc. complete :                                                                                          |       |          |             | -                |



| S. No. | Ref. No   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Unit  | Quantity | DSR 23 Rate | Amount (Rs.) |
|--------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------|-------------|--------------|
| a)     | 9.100.1   | 125 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Each  | 4.00     | 66.25       | 265.00       |
| 6.13   | 9.101     | Providing and fixing aluminium hanging floor door stopper, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour and shade, with necessary screws etc. complete.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |       |          |             | -            |
| a)     | 9.101.2   | Twin rubber stopper                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Each  | 8.00     | 72.35       | 578.80       |
| 6.14   | 9.127     | Providing & Fixing decorative high pressure laminated sheet of plain / wood grain in gloss / matt/ suede finish with high density protective surface layer and reverse side of adhesive bonding quality conforming to IS : 2046 Type S, including cost of adhesive of approved quality.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |       |          |             |              |
|        | 9.127.1   | 1.5 mm thick                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | sqm   | 6.30     | 1,045.95    | 6,589.49     |
| 6.15   | 9.130     | Providing and fixing cup board shutters with 25 mm thick veneered particle board IS : 3097 marked, exterior grade (Grade I), of approved make, including IInd class teak wood lipping of 25 mm wide x 12 mm thick with necessary screws and bright finished stainless steel piano hinges, complete as per direction of Engineer-in-Charge.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |       |          |             |              |
| a)     | 9.130.1   | With decorative veneering on one side and commercial veneering on other side                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Sqm   | 10.08    | 1,927.50    | 19,429.20    |
| 6.16   | 9.147     | Providing and fixing factory made uPVC white colour sliding glazed window upto 1.50 m in height dimension comprising of uPVC multi-chambered frame with in-built roller track and sash extruded profiles duly reinforced with 1.60 ± 0.2 mm thick galvanized mild steel section made from roll forming process of required length (shape & size according to uPVC profile), appropriate dimension of uPVC extruded glazing beads and uPVC extruded interlocks, EPDM gasket, wool pile, zinc alloy (white powder coated) touch locks with hook, zinc alloy body with single nylon rollers (weight bearing capacity to be 40 kg), G.I fasteners 100 x 8 mm size for fixing frame to finished wall and necessary stainless steel screws etc. Profile of frame & sash shall be mitred cut and fusion welded at all corners, including drilling of holes for fixing hardware's and drainage of water etc. After |       |          |             |              |
| a)     | 9.147A4.1 | Three track three panels sliding window with fly proof S.S wire mesh (Two nos. glazed & one no. wire mesh panels) made of (big series) frame 116 x 45 mm & sash 46 x 62 mm both having wall thickness of 2.3 ± 0.2 mm and single glazing bead / double glazing bead of appropriate dimension. (Area of window above 1.75 sqm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Sqm   | 13.53    | 10,993.55   | 148,742.73   |
| 6.17   | 9.59      | Providing and fixing ISI marked oxidised M.S. single acting spring hinges with necessary screws etc. complete :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |       |          |             |              |
| a)     | 9.59.1    | 150 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | each  | 16.00    | 291.35      | 4,661.60     |
| 6.18   | 9.67      | Providing and fixing oxidised M.S. hasp and staple (safety type) conforming to IS : 363 with necessary screws etc. complete :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |       |          |             |              |
| a)     | 9.67.3    | 90 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | each  | 16.00    | 25.30       | 404.80       |
| 6.19   | 9.79      | Providing and fixing special quality bright finished brass cupboard or ward robe locks with four levers of approved quality including necessary screws etc. complete                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |       |          |             |              |
| a)     | 9.79.4    | 75 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | each  | 8.00     | 386.60      | 3,092.80     |
| 6.20   | 9.111     | Providing and fixing wooden moulded corner beading of triangular shape to the junction of panelling etc. with iron screws, plugs and priming coat on unexposed surface etc. complete 2nd class teak wood.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |       |          |             |              |
| a)     | 9.111.1   | 50x50 mm (base and height)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | meter | 20.80    | 354.35      | 7,370.48     |
| 6.21   | 9.7.7.2   | Float glass panes 5.0 mm thick glass panes (weight not less than 12.50 kg/sqm).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Sqm   | 13.53    | 2600.45     | 35184.09     |

| S. No.      | Ref. No    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Unit  | Quantity | DSR 23 Rate | Amount (Rs.)      |
|-------------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------|-------------|-------------------|
| 6.22        | 9.147.C2   | Providing and fixing factory made uPVC white colour fixed glazed windows/ ventilators comprising of uPVC multi-chambered frame and mullion (where ever required) extruded profiles duly reinforced with 1.60 ± 0.2 mm thick galvanized mild steel section made from roll forming process of required length (shape & size according to uPVC profile), , uPVC extruded glazing beads of appropriate dimension, EPDM gasket, G.I fasteners 100 x 8 mm size for fixing frame to finished wall, plastic packers, plastic caps and necessary stainless steel screws etc. Profile of frame shall be mitred cut and fusion welded at all corners, mullion (if required) shall be also fusion welded including drilling of holes for fixing hardware's and drainage of water etc. After fixing frame the gap between frame and adjacent finished wall shall be filled with weather proof silicon sealant over backer rod of required size and of approved quality, all complete as per approved drawing & direction of Engineer-in-Charge. (Single / double glass |       |          |             |                   |
| a)          | 9.147.C2.1 | Fixed window / ventilator made of (small series) frame 47 x 50 mm & mullion 47 x 68 mm both having wall thickness of 1.9 ± 0.2 mm and single glazing bead of appropriate dimension.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Sqm   | 1.44     | 9,155.20    | 13,183.49         |
|             |            | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |       |          |             | <b>431,012.73</b> |
| <b>7.00</b> | <b>10</b>  | <b>STEEL WORK</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |       |          |             |                   |
| 7.01        | 10.13      | Providing and fixing T-iron frames for doors, windows and ventilators of mild steel Tee-sections, joints mitred and welded, including fixing of necessary butt hinges and screws and applying a priming coat of approved steel primer.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |       |          |             |                   |
| a)          | 10.13.1    | Fixing with 15x3 mm lugs 10 cm long embedded in cement concrete block 15x10x10 cm of C.C. 1:3:6 (1 Cement : 3 coarse sand : 6 graded stone aggregate 20 mm nominal size)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Kg    | 166.63   | 141.70      | 23,612.04         |
| 7.02        | 10.18      | Providing and fixing circular/ Hexagonal cast iron or M.S. sheet box for ceiling fan clamp, of internal dia 140 mm, 73 mm height, top lid of 1.5 mm thick M.S. sheet with its top surface hacked for proper bonding, top lid shall be screwed into the cast iron/ M.S. sheet box by means of 3.3 mm dia round headed screws, one lock at the corners. Clamp shall be made of 12 mm dia M.S. bar bent to shape as per standard drawing.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Each  | 4.00     | 220.65      | 882.60            |
| 7.03        | 10.30      | Providing & fixing glass panes with putty and glazing clips in steel doors, windows, clerestory windows, all complete with :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |       |          |             |                   |
| a)          | 10.30.1    | 4.0 mm thick glass panes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Sqm   | 3.10     | 1,064.65    | 3,296.16          |
|             |            | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |       |          |             | <b>27,790.79</b>  |
| <b>8.00</b> | <b>11</b>  | <b>FLOORING</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |       |          |             |                   |
| 8.01        | 11.13      | Providing and fixing glass strips in joints of terrazzo/ cement concrete floors.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |          |             |                   |
| a)          | 11.13.1    | 40 mm wide and 4 mm thick                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | meter | 20.00    | 91.75       | 1,835.00          |
| 8.02        | 11.27      | Kota stone slabs 20 mm thick in risers of steps, skirting, dado and pillars laid on 12 mm (average) thick cement mortar 1:3 (1 cement: 3 coarse sand) and jointed with grey cement slurry mixed with pigment to match the shade of the slabs, including rubbing and polishing complete.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Sqm   | 4.17     | 2,354.70    | 9,812.03          |
| 8.03        | 11.31      | Extra for pre finished nosing in treads of steps of Kota stone/ sand stone slab.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Metre | 1.87     | 191.40      | 358.30            |
| 8.04        | 11.32      | Extra for Kota stone/ sand stone in treads of steps and risers using single length up to 1.05 metre.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Sqm   | 1.87     | 44.15       | 82.65             |
| 8.05        | 8.31       | Providing and fixing 1st quality ceramic glazed wall tiles conforming to IS: 15622 (thickness to be specified by the manufacturer), of approved make, in all colours, shades except burgundy, bottle green, black of any size as approved by Engineer-in-Charge, in skirting, risers of steps and dados, over 12 mm thick bed of cement mortar 1:3 (1 cement : 3 coarse sand) and jointing with grey cement slurry @ 3.3kg per sqm, including pointing in white cement mixed with pigment of matching shade complete.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Sqm   | 27.83    | 1,267.95    | 35,280.71         |

| S. No.       | Ref. No   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                          | Unit | Quantity | DSR 23 Rate | Amount (Rs.)      |
|--------------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|----------|-------------|-------------------|
| 8.06         | 11.37     | Providing and laying Ceramic glazed floor tiles of size 300x300 mm (thickness to be specified by the manufacturer) of 1st quality conforming to IS : 15622 of approved make in colours such as White, Ivory, Grey, Fume Red Brown, laid on 20 mm thick cement mortar 1:4 (1 Cement : 4 Coarse sand), jointing with grey cement slurry @ 3.3kg/sqm including pointing the joints with white cement and matching pigment etc., complete.               | Sqm  | 16.17    | 1,096.55    | 17,731.21         |
| 8.07         | 11.41     | Providing and laying vitrified floor tiles in different sizes (thickness to be specified by the manufacturer) with water absorption less than 0.08% and conforming to IS: 15622, of approved make, in all colours and shades, laid on 20mm thick cement mortar 1:4 (1 cement : 4 coarse sand), jointing with grey cement slurry @ 3.3kg/sqm including grouting the joints with white cement and matching pigments etc., complete.                    |      |          |             | -                 |
| a)           | 11.41.2   | Size of Tile 600x600 mm                                                                                                                                                                                                                                                                                                                                                                                                                              | Sqm  | 78.46    | 1,553.45    | 121,886.23        |
| 8.08         | 11.46     | Providing and laying Vitrified tiles in different sizes (thickness to be specified by manufacturer), with water absorption less than 0.08 % and conforming to I.S. 15622, of approved make, in all colours & shade, in skirting, riser of steps, over 12 mm thick bed of cement mortar 1:3 (1 cement: 3 coarse sand), jointing with grey cement slurry @ 3.3kg/sqm including grouting the joint with white cement & matching pigments etc. complete. |      |          |             | -                 |
| a)           | 11.46.2   | Size of Tile 600x600 mm                                                                                                                                                                                                                                                                                                                                                                                                                              | Sqm  | 7.85     | 1,623.05    | 12,734.72         |
|              |           | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                                                                                                                                                             |      |          |             | <b>226,357.16</b> |
| <b>9.00</b>  | <b>12</b> | <b>ROOFING</b>                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |          |             | -                 |
| 9.01         | 12.22     | Making khurras 45x45 cm with average minimum thickness of 5 cm cement concrete 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate of 20 mm nominal size) over P.V.C. sheet 1 m x1 m x 400 micron, finished with 12 mm cement plaster 1:3 (1 cement : 3 coarse sand) and a coat of neat cement, rounding the edges and making and finishing the outlet complete.                                                                              | Each | 4.00     | 298.25      | 1,193.00          |
|              |           | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                                                                                                                                                             |      |          |             | <b>1,193.00</b>   |
| <b>10.00</b> | <b>13</b> | <b>FINISHING</b>                                                                                                                                                                                                                                                                                                                                                                                                                                     |      |          |             | -                 |
| 10.01        | 13.4      | 12 mm cement plaster of mix                                                                                                                                                                                                                                                                                                                                                                                                                          |      |          |             | -                 |
| a)           | 13.4.2    | 1:6 (1 cement: 6 coarse sand)                                                                                                                                                                                                                                                                                                                                                                                                                        | Sqm  | 297.19   | 343.65      | 102,128.55        |
| 10.02        | 13.5      | 15 mm cement plaster on rough side of single or half brick wall of mix:                                                                                                                                                                                                                                                                                                                                                                              |      |          |             | -                 |
| a)           | 13.5.2    | 1:6 (1 cement: 6 coarse sand)                                                                                                                                                                                                                                                                                                                                                                                                                        | Sqm  | 336.24   | 395.35      | 132,931.25        |
| 10.03        | 13.9      | Cement plaster 1:3 (1 cement: 3 coarse sand) finished with a floating coat of neat cement.                                                                                                                                                                                                                                                                                                                                                           |      |          |             | -                 |
| a)           | 13.9.2    | 20 mm cement plaster                                                                                                                                                                                                                                                                                                                                                                                                                                 | Sqm  | 6.00     | 587.20      | 3,523.20          |
| 10.04        | 13.16     | 6mm cement plaster of mix                                                                                                                                                                                                                                                                                                                                                                                                                            |      |          |             | -                 |
| a)           | 13.16.1   | 1:3 (1 cement : 3 fine sand)                                                                                                                                                                                                                                                                                                                                                                                                                         | Sqm  | 141.61   | 300.45      | 42,545.93         |
| 10.05        | 13.37     | White washing with lime to give an even shade :                                                                                                                                                                                                                                                                                                                                                                                                      |      |          |             | -                 |
| a)           | 13.37.1   | New work (three or more coats)                                                                                                                                                                                                                                                                                                                                                                                                                       | Sqm  | 141.61   | 39.05       | 5,529.77          |
| 10.06        | 13.41     | Distempering with oil bound washable distemper of approved brand and manufacture to give an even shade :                                                                                                                                                                                                                                                                                                                                             |      |          |             | -                 |
| a)           | 13.41.1   | New work (two or more coats) over and including water thinnable priming coat                                                                                                                                                                                                                                                                                                                                                                         | Sqm  | 495.31   | 185.65      | 91,954.83         |
| 10.07        | 13.47     | Finishing walls with Premium Acrylic Smooth exterior paint withSilicone additives of required shade:                                                                                                                                                                                                                                                                                                                                                 |      |          |             | -                 |
| a)           | 13.47.1   | New work (Two or more coats applied @ 1.43 ltr/10 sqm over and including priming coat of exterior primer applied @ 2.20 kg/10 sqm)                                                                                                                                                                                                                                                                                                                   | Sqm  | 139.00   | 171.10      | 23,782.90         |
| 10.08        | 13.50     | Applying priming coat:                                                                                                                                                                                                                                                                                                                                                                                                                               |      |          |             | -                 |
| a)           | 13.50.2   | With ready mixed pink or Grey primer of approved brand and manufacture on wood work (hard and soft wood)                                                                                                                                                                                                                                                                                                                                             | Sqm  | 103.00   | 74.65       | 7,688.95          |
| b)           | 13.50.3   | With ready mixed red oxide zinc chromate primer of approved brand and manufacture on steel galvanised iron/ steel works                                                                                                                                                                                                                                                                                                                              | Sqm  | 24.00    | 67.40       | 1,617.60          |
|              |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                      |      |          |             | -                 |

| S. No.       | Ref. No   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Unit | Quantity | DSR 23 Rate | Amount (Rs.)      |
|--------------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|----------|-------------|-------------------|
| 10.09        | 13.62     | Painting with synthetic enamel paint of approved brand and manufacture to give an even shade :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |          |             | -                 |
| a)           | 13.62.1   | Two or more coats on new work                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Sqm  | 125.64   | 226.25      | 28,425.78         |
| 10.10        | 13.65     | Painting with black anti-corrosive bitumastic paint of approved brand and manufacture to give an even shade :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |      |          |             |                   |
| a)           | 13.65.1   | Two or more coats on new work                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Sqm  | 6.00     | 140.25      | 841.50            |
| 10.11        | 13.80     | Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Sqm  | 775.03   | 156.05      | 120,943.73        |
|              |           | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |      |          |             | <b>561,913.98</b> |
| <b>11.00</b> | <b>22</b> | <b>WATER PROOFING</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |      |          |             |                   |
| 11.01        | 14.86     | Providing and laying in situ seven course water proofing treatment with APP (Atactic poly-propylene) modified Polymeric memberane over roof consisting of first coat of bitumen primer @ 0.40 litre per sqm, 2nd, 4th & 6th courses of bonding material @ 1.20 Kg/sqm, which shall consist of blown type bitumen of grade 85/25 conforming to IS : 702, 3rd and 5th layers of roofing membrane APP modified Polymeric membrane 1.5 mm thick of 2.25 Kg/sqm weight consisting of five layers prefabricated with centre core as 20 micron HMHDPE film sandwiched on both sides with polymeric mix and the polymeric mix is protected on both side with 20 micron HMHDPE film. 7th, the top most layer shall be finished with brick tiles of class designation 10 grouted with cement mortar 1:3 (1cement : 3 fine sand) mixed with 2% integral water proofing compound by weight of cement over a 12 mm layer of cement mortar 1:3 (1 cement : 3 fine sand) and finished neat (item of laying brick tiles shall be paid for |      |          |             | -                 |
|              |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Sqm  | 133.00   | 730.55      | 97,163.15         |
| 11.01A       | 12.19.1   | Providing and laying brick tiles over mumty roofs, grouted with cement mortar 1:3 (1 cement : 3 fine sand) mixed with 2% of integral water proofing compound by weight of cement, over 12 mm layer of cement mortar 1:3 (1 cement : 3 fine sand) and finished neat: 12.19.1 With common burnt clay F.P.S. (non modular) brick tiles of class designation 10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Sqm  | 133.00   | 607.40      | 80784.20          |
|              |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |      |          |             |                   |
|              |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |      |          |             |                   |
|              |           | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |      |          |             | <b>177,947.35</b> |

| Detail estimate of “Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (UP)” |                        |                   |
|--------------------------------------------------------------------------------------------------------------|------------------------|-------------------|
| GUEST HOUSE                                                                                                  |                        |                   |
| SUMMARY OF COST (SANITARY WORK)                                                                              |                        |                   |
| S. No.                                                                                                       | DESCRIPTION            | Amount            |
| 1                                                                                                            | EARTH WORK             | 851.48            |
| 2                                                                                                            | ROOFING                | 3,863.55          |
| 3                                                                                                            | SANITARY INSTALLATIONS | 143,725.45        |
| 4                                                                                                            | WATER SUPPLY           | 47,546.70         |
| 5                                                                                                            | SEWERAGE & DRAINAGE    | 12,653.80         |
|                                                                                                              |                        |                   |
|                                                                                                              | <b>TOTAL</b>           | <b>208,640.98</b> |
|                                                                                                              |                        |                   |
|                                                                                                              |                        |                   |

**Detail estimate of "Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (UP)"**

**GUEST HOUSE**

**ABSTRACT OF COST (SANITARY WORKS)**

| S. No. | Ref. No   | Description                                                                                                                                                                                                                                                                                                                                                                                                                               | Unit  | Qty  | DSR 23 Rate | Amount (Rs.)  |
|--------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-------------|---------------|
| 1      | 2         | 3                                                                                                                                                                                                                                                                                                                                                                                                                                         | 4     | 8    | 9           | 10            |
| 1.00   | 2.00      | <b>EARTH WORK</b>                                                                                                                                                                                                                                                                                                                                                                                                                         |       |      |             |               |
| 1.01   | 2.8       | Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan), including dressing of sides and ramming of bottoms, lift upto 1.5 m, including getting out the excavated soil and disposal of surplus excavated soil as directed within a lead of 50 m                                                                               |       |      |             |               |
| a)     | 2.8.1     | All kinds of soil.                                                                                                                                                                                                                                                                                                                                                                                                                        | Cum   | 1.17 | 260.30      | 303.33        |
| 1.02   | 2.10      | Excavating trenches of required width for pipes, cables, etc including excavation for sockets, and dressing of sides, ramming of bottoms, depth upto 1.5 m, including getting out the excavated soil, and then returning the soil as required, in layers not exceeding 20 cm in depth, including consolidating each deposited layer by ramming, watering, etc. and disposing of surplus excavated soil as directed within a lead of 50 m. |       |      |             |               |
|        | 2.10.1    | All kinds of soil                                                                                                                                                                                                                                                                                                                                                                                                                         |       |      |             |               |
| b)     | 2.10.1.2  | Pipes, cables etc. exceeding 80 mm dia. but not exceeding 300 mm dia                                                                                                                                                                                                                                                                                                                                                                      | Metre | 1.00 | 352.15      | 352.15        |
| 1.03   | 2.25      | Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20cm in depth, consolidating each deposited layer by ramming and watering, lead up to 50 m and lift upto 1.5 m                                                                                                                                                                                                  | Cum   | 1.00 | 196.00      | 196.00        |
|        |           | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                                                                                                                                                  |       |      |             | <b>851.48</b> |
| 2.00   | 12.00     | <b>ROOFING</b>                                                                                                                                                                                                                                                                                                                                                                                                                            |       |      |             |               |
| 2.01   | 12.41     | Providing and fixing on wall face unplasticised Rigid PVC rain water pipes conforming to IS : 13592 Type A, including jointing with seal ring conforming to IS : 5382, leaving 10 mm gap for thermal expansion (i) Single socketed pipes                                                                                                                                                                                                  |       |      |             |               |
| A)     | 12.41.2   | 110 mm diameter                                                                                                                                                                                                                                                                                                                                                                                                                           | Metre | 8.00 | 377.40      | 3019.20       |
| 2.02   | 12.42     | Providing and fixing on wall face unplasticised - PVC moulded fittings/ accessories for unplasticised Rigid PVC rain water pipes conforming to IS : 13592 Type A, including jointing with seal ring                                                                                                                                                                                                                                       |       |      |             |               |
| i)     | 12.42.1   | Coupler                                                                                                                                                                                                                                                                                                                                                                                                                                   |       |      |             |               |
| a)     | 12.42.1.2 | 110 mm                                                                                                                                                                                                                                                                                                                                                                                                                                    | Each  | 1.00 | 136.15      | 136.15        |
| ii)    | 12.42.5   | Bend 87.5°                                                                                                                                                                                                                                                                                                                                                                                                                                |       |      |             |               |
| a)     | 12.42.5.2 | 110 mm bend                                                                                                                                                                                                                                                                                                                                                                                                                               | Each  | 1.00 | 150.35      | 150.35        |
| iii)   | 12.42.6   | Shoe (Plain)                                                                                                                                                                                                                                                                                                                                                                                                                              |       |      |             |               |
| a)     | 12.42.6.2 | 110 mm Shoe                                                                                                                                                                                                                                                                                                                                                                                                                               | Each  | 1.00 | 131.85      | 131.85        |
| 2.03   | 12.43     | Providing and fixing unplasticised -PVC pipe clips of approved design to unplasticised - PVC rain water pipes by means of 50x50x50 mm hard wood plugs, screwed with M.S. screws of required length, including cutting brick work and fixing in cement mortar 1:4 (1 cement : 4 coarse sand) and making good the wall etc. complete                                                                                                        |       |      |             |               |
| a)     | 12.43.2   | 110 mm                                                                                                                                                                                                                                                                                                                                                                                                                                    | Each  | 1.00 | 371.30      | 371.30        |

| S. No. | Ref. No   | Description                                                                                                                                                                                                                                                                                                                                                                        | Unit  | Qty   | DSR 23 Rate | Amount (Rs.)   |
|--------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|-------------|----------------|
| 1      | 2         | 3                                                                                                                                                                                                                                                                                                                                                                                  | 4     | 8     | 9           | 10             |
| 2.04   | 12.44     | Providing and fixing to the inlet mouth of rain water pipe cast iron grating 15 cm diameter and weighing not less than 440 grams.                                                                                                                                                                                                                                                  | Each  | 1.00  | 54.70       | 54.70          |
|        |           | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                                                                                           |       |       |             | <b>3863.55</b> |
| 3.00   | 17.00     | <b>SANITARY INSTALLATIONS</b>                                                                                                                                                                                                                                                                                                                                                      |       |       |             |                |
| 3.01   | 17.1      | Providing and fixing water closet squatting pan (Indian type W.C. pan ) with 100 mm sand cast Iron P or S trap, 10 litre low level white P.V.C. flushing cistern, including flush pipe, with manually controlled device (handle lever) conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required: |       |       |             |                |
| a)     | 17.1.1    | White Vitreous china Orissa pattern W.C. pan of size 580x440 mm with integral type foot rests                                                                                                                                                                                                                                                                                      | Each  | 2.00  | 6767.40     | 13534.80       |
| 3.02   | 17.7      | Providing and fixing wash basin with C.I. brackets, 15 mm C.P. brass pillar taps, 32 mm C.P. brass waste of standard pattern, including painting of fittings and brackets, cutting and making good the walls wherever require:                                                                                                                                                     |       |       |             |                |
| a)     | 17.7.4    | White Vitreous China Flat back wash basin size 550x 400 mm with single 15 mm C.P. brass pillar tap                                                                                                                                                                                                                                                                                 | Each  | 2.00  | 1879.20     | 3758.40        |
| 3.03   | 17.10     | Providing and fixing Stainless Steel A ISI 304 (18/8) kitchen sink as per IS: 13983 with C.I. brackets and stainless steel plug 40 mm, including painting of fittings and brackets, cutting and making good the walls wherever required :                                                                                                                                          |       |       |             |                |
| a)     | 17.10.1   | Kitchen sink with drain board                                                                                                                                                                                                                                                                                                                                                      |       |       |             |                |
|        | 17.10.1.1 | 510x1040 mm bowl depth 250 mm                                                                                                                                                                                                                                                                                                                                                      | Each  | 1.00  | 6945.60     | 6945.60        |
| 3.04   | 17.16     | Extra for using coloured pedestal type W.C pan (European type) with low level cistern of same colour instead of white vitreous china W.C pan and cistern.                                                                                                                                                                                                                          | Each  | 1.00  | 170.70      | 170.70         |
| 3.05   | 17.31     | Providing and fixing 600x450 mm beveled edge mirror of superior glass (of approved quality) complete with 6 mm thick hard board ground fixed to wooden cleats with C.P. brass screws and washers complete.                                                                                                                                                                         | Each  | 2.00  | 1607.95     | 3215.90        |
| 3.06   | 17. 34    | Providing and fixing toilet paper holder :                                                                                                                                                                                                                                                                                                                                         |       |       |             |                |
| a)     | 17.34.2   | Vitreous china                                                                                                                                                                                                                                                                                                                                                                     | Each  | 4.00  | 546.35      | 2185.40        |
| 3.07   | 17. 35    | Providing and fixing soil, waste and vent pipes :                                                                                                                                                                                                                                                                                                                                  |       |       |             |                |
| a)     | 17.35.1   | 100 mm dia.                                                                                                                                                                                                                                                                                                                                                                        |       |       |             |                |
| i)     | 17.35.1.2 | Centrifugally cast (spun) iron socket & spigot (S&S) pipe as per IS: 3989                                                                                                                                                                                                                                                                                                          | Metre | 18.00 | 1180.75     | 21253.50       |
| b)     | 17.35.2   | 75mm diameter                                                                                                                                                                                                                                                                                                                                                                      |       |       |             |                |
| i)     | 17.35.2.2 | Centrifugally cast (spun) iron socketed pipe as per IS: 3989                                                                                                                                                                                                                                                                                                                       | Metre | 7.00  | 1186.00     | 8302.00        |
| 3.08   | 17. 37    | Providing and fixing M.S. holder-bat clamps of approved design to Sand Cast iron/cast iron (spun) pipe embedded in and including cement concrete blocks 10x10x10 cm of 1:2:4 mix (1 cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size), including cost of cutting holes and making good the walls etc. :                                                        |       |       |             |                |
| a)     | 17.37.1   | For 100 mm dia. pipe                                                                                                                                                                                                                                                                                                                                                               | Each  | 2.00  | 362.85      | 725.70         |
| b)     | 17.37.2   | For 75 mm dia. pipe                                                                                                                                                                                                                                                                                                                                                                | Each  | 2.00  | 360.00      | 720.00         |
| 3.09   | 17. 38    | Providing and fixing bend of required degree with access door, insertion rubber washer 3 mm thick, bolts and nuts complete.                                                                                                                                                                                                                                                        |       |       |             |                |
| a)     | 17.38.1   | 100 mm                                                                                                                                                                                                                                                                                                                                                                             |       |       |             |                |
| i)     | 17.38.1.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                                                                                                                                                                                                                | Each  | 4.00  | 705.20      | 2820.80        |
| b)     | 17.38.2   | 75 mm                                                                                                                                                                                                                                                                                                                                                                              |       |       |             |                |
| i)     | 17.38.2.2 | Sand cast iron S&S as per IS- 3989                                                                                                                                                                                                                                                                                                                                                 | Each  | 4.00  | 522.80      | 2091.20        |

| S. No. | Ref. No   | Description                                                                                                                                                                                | Unit | Qty   | DSR 23<br>Rate | Amount<br>(Rs.) |
|--------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------|----------------|-----------------|
| 1      | 2         | 3                                                                                                                                                                                          | 4    | 8     | 9              | 10              |
| 3.10   | 17. 39    | Providing and fixing plain bend of required degree.                                                                                                                                        |      |       |                |                 |
| a)     | 17.39.1   | 100 mm                                                                                                                                                                                     |      |       |                |                 |
| i)     | 17.39.1.2 | Sand cast iron S&S as per IS : 3989                                                                                                                                                        | Each | 4.00  | 570.05         | 2280.20         |
| b)     | 17.39.2   | 75 mm                                                                                                                                                                                      |      |       |                |                 |
| i)     | 17.39.2.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                        | Each | 4.00  | 390.50         | 1562.00         |
| 3.11   | 17. 40    | Providing and fixing heel rest sanitary bend                                                                                                                                               |      |       |                |                 |
| a)     | 17.40.1   | 100 mm dia                                                                                                                                                                                 |      |       |                |                 |
| i)     | 17.40.1.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                        | Each | 1.00  | 548.70         | 548.70          |
| b)     | 17.40.2   | 75 mm dia                                                                                                                                                                                  |      |       |                |                 |
| i)     | 17.40.2.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                        | Each | 1.00  | 504.30         | 504.30          |
| 3.12   | 17. 43    | Providing and fixing single equal plain junction of required degree with access door, insertion rubber washer 3mm thick, bolts and nuts complete.                                          |      |       |                |                 |
| a)     | 17.43.1   | 100x100x100mm                                                                                                                                                                              |      |       |                |                 |
| i)     | 17.43.1.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                        | Each | 2.00  | 925.70         | 1851.40         |
| b)     | 17.43.1   | 75x75x75mm                                                                                                                                                                                 |      |       |                |                 |
| i)     | 17.43.1.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                        | Each | 2.00  | 925.70         | 1851.40         |
| 3.13   | 17. 44    | Providing and fixing single equal plain junction of required degree                                                                                                                        |      |       |                |                 |
| a)     | 17.44.1   | 100x100x100mm                                                                                                                                                                              |      |       |                |                 |
| i)     | 17.44.1.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                        | Each | 2.00  | 811.90         | 1623.80         |
| b)     | 17.44.2   | 75x75x75mm                                                                                                                                                                                 |      |       |                |                 |
| i)     | 17.44.2.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                        | Each | 1.00  | 561.20         | 561.20          |
| 3.14   | 17. 55    | Providing and fixing door piece, insertion rubber washer 3mm thick, bolts & nuts complete :                                                                                                |      |       |                |                 |
| a)     | 17.55.1   | 100 mm                                                                                                                                                                                     |      |       |                |                 |
| i)     | 17.55.1.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                        | Each | 2.00  | 683.85         | 1367.70         |
| b)     | 17.55.2   | 75 mm                                                                                                                                                                                      |      |       |                |                 |
| i)     | 17.55.2.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                        | Each | 2.00  | 537.00         | 1074.00         |
| 3.15   | 17. 56    | Providing and fixing terminal guard :                                                                                                                                                      |      |       |                |                 |
| a)     | 17.56.1   | 100 mm                                                                                                                                                                                     |      |       |                |                 |
| i)     | 17.56.1.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                        | Each | 2.00  | 506.00         | 1012.00         |
| b)     | 17.56.2   | 75 mm                                                                                                                                                                                      |      |       |                |                 |
| i)     | 17.56.2.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                        | Each | 2.00  | 404.75         | 809.50          |
| 3.16   | 17. 57    | Providing and fixing collar :                                                                                                                                                              |      |       |                |                 |
| a)     | 17.57.1   | 100 mm                                                                                                                                                                                     |      |       |                |                 |
| i)     | 17.57.1.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                        | Each | 2.00  | 513.15         | 1026.30         |
| b)     | 17.57.2   | 75 mm                                                                                                                                                                                      |      |       |                |                 |
| i)     | 17.57.2.2 | Sand cast iron S&S as per IS - 3989                                                                                                                                                        | Each | 2.00  | 362.05         | 724.10          |
| 3.17   | 17. 58    | Providing lead caulked joints to sand cast iron/centrifugally cast                                                                                                                         |      |       |                |                 |
| a)     | 17.58.1   | 100 mm                                                                                                                                                                                     | Each | 10.00 | 622.50         | 6225.00         |
| b)     | 17.58.2   | 75 mm                                                                                                                                                                                      | Each | 10.00 | 526.25         | 5262.50         |
| 3.18   | 17. 59    | Providing and fixing M.S. stays and clamps for sand cast iron/centrifugally cast (spun) iron pipes of diameter :                                                                           |      |       |                |                 |
| a)     | 17.59.1   | 100 mm                                                                                                                                                                                     | Each | 4.00  | 139.70         | 558.80          |
| b)     | 17.59.2   | 75 mm                                                                                                                                                                                      | Each | 4.00  | 90.30          | 361.20          |
| 3.19   | 17.60     | Providing and fixing trap of self cleansing design with screwed down or hinged grating with or without vent arm complete, including cost of cutting and making good the walls and floors : |      |       |                |                 |
| a)     | 17.60.1   | 100 mm inlet and 100 mm outlet                                                                                                                                                             |      |       |                |                 |
| i)     | 17.60.1.2 | Sand Cast Iron S&S as per IS: 1729                                                                                                                                                         | Each | 16.00 | 1683.55        | 26936.80        |



| S. No. | Ref. No | Description                                                                                                                                                                                                                                                                                                                                                                             | Unit  | Qty   | DSR 23 Rate | Amount (Rs.)     |
|--------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|-------------|------------------|
| 1      | 2       | 3                                                                                                                                                                                                                                                                                                                                                                                       | 4     | 8     | 9           | 10               |
| 3.20   | 17.61   | Cutting chases in brick masonry walls for following diameter sand cast iron/ centrifugally cast (spun) iron pipes and making good the same with cement concrete 1:3:6 ( 1 cement : 3 coarse sand :6 graded stone aggregate 12.5 mm nominal size), including necessary plaster and pointing in cement mortar 1:4 (1 cement : 4 coarse sand) :                                            |       |       |             |                  |
| a)     | 17.61.1 | 100 mm dia                                                                                                                                                                                                                                                                                                                                                                              | Metre | 5.00  | 713.20      | 3566.00          |
| 3.21   | 17.65   | Painting sand cast iron/ centrifugally cast (spun) iron soil, waste vent pipes and fittings with two coats of synthetic enamel paint of any colour such as chocolate grey, or buff etc. over a coat of primer (of approved quality) for new work :                                                                                                                                      |       |       |             |                  |
| a)     | 17.65.1 | 100 mm diameter pipe                                                                                                                                                                                                                                                                                                                                                                    | Metre | 18.00 | 82.80       | 1490.40          |
| b)     | 17.65.2 | 75 mm diameter pipe                                                                                                                                                                                                                                                                                                                                                                     | Metre | 7.00  | 62.95       | 440.65           |
| 3.22   | 17.69   | Providing and fixing PTMT Waste Coupling for wash basin and sink, of approved quality and colour.                                                                                                                                                                                                                                                                                       |       |       |             |                  |
| a)     | 17.69.2 | Waste coupling 38 mm dia of 83 mm length and 77mm breadth, weighing not less than 60 gms                                                                                                                                                                                                                                                                                                | Each  | 3.00  | 122.40      | 367.20           |
| 3.23   | 17.70   | Providing and fixing PTMT Bottle Trap for Wash basin and sink.                                                                                                                                                                                                                                                                                                                          |       |       |             |                  |
| a)     | 17.70.1 | Bottle trap 31mm single piece moulded with height of 270 mm, effective length of tail pipe 260 mm from the centre of the waste coupling, 77 mm breadth with 25 mm minimum water seal, weighing not less than 260 gms                                                                                                                                                                    | Each  | 2.00  | 367.10      | 734.20           |
| 3.24   | 17.71   | Providing and fixing PTMT liquid soap container 109 mm wide, 125 mm high and 112 mm distance from wall of standard shape with bracket of the same materials with snap fittings of approved quality and colour, weighing not less than 105 gms.                                                                                                                                          | Each  | 2.00  | 168.35      | 336.70           |
| 3.25   | 17.73   | Providing and fixing PTMT towel rail complete with brackets fixed to wooden cleats with CP brass screws with concealed fittings arrangement of approved quality and colour.                                                                                                                                                                                                             |       |       |             |                  |
| a)     | 17.73.2 | 600 mm long towel rail with total length of 645 mm, width 78 mm and effective height of 88 mm, weighing not less than 190 gms.                                                                                                                                                                                                                                                          | Each  | 2.00  | 708.95      | 1417.90          |
| 3.26   | 18.12   | Providing and fixing G.I. pipes complete with G.I. fittings including trenching & refilling.                                                                                                                                                                                                                                                                                            |       |       |             |                  |
|        |         | External work                                                                                                                                                                                                                                                                                                                                                                           |       |       |             |                  |
|        | 18.12.4 | 32mm dia nominal bore                                                                                                                                                                                                                                                                                                                                                                   | Metre | 25.00 | 540.30      | 13507.50         |
|        |         | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                                                                                                |       |       |             | <b>143725.45</b> |
| 4.00   | 18.00   | <b>WATER SUPPLY</b>                                                                                                                                                                                                                                                                                                                                                                     |       |       |             |                  |
| 4.01   | 18.7    | Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply, including all CPVC plain & brass threaded fittings, including fixing the pipe with clamps at 1.00 m spacing. This includes jointing of pipes & fittings with one step CPVC solvent cement and testing of joints complete as per direction of Engineer in Charge |       |       |             |                  |
|        |         | <b>Internal work - Exposed on wall</b>                                                                                                                                                                                                                                                                                                                                                  |       |       |             |                  |
| a)     | 18.7.3  | 25 mm nominal outer dia Pipes metre                                                                                                                                                                                                                                                                                                                                                     | Metre | 10.00 | 401.55      | 4015.50          |
| b)     | 18.7.4  | 32 mm nominal outer dia Pipes metre                                                                                                                                                                                                                                                                                                                                                     | Metre | 5.00  | 518.75      | 2593.75          |

| S. No. | Ref. No   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                      | Unit     | Qty    | DSR 23 Rate | Amount (Rs.) |
|--------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|--------|-------------|--------------|
| 1      | 2         | 3                                                                                                                                                                                                                                                                                                                                                                                                                                                | 4        | 8      | 9           | 10           |
| 4.02   | 18.8      | Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply, including all CPVC plain & brass threaded fittings, i/c fixing the pipe with clamps at 1.00 m spacing. This includes jointing of pipes & fittings with one step CPVC solvent cement and the cost of cutting chases and making good the same including testing of joints complete as per direction of Engineer in Charge. |          |        |             |              |
|        |           | <b>Concealed work</b> , including cutting chases and making good the walls etc.                                                                                                                                                                                                                                                                                                                                                                  |          |        |             |              |
| a)     | 18.8.1    | 15 mm nominal outer dia Pipes                                                                                                                                                                                                                                                                                                                                                                                                                    | Metre    | 10.00  | 497.80      | 4978.00      |
| b)     | 18.8.2    | 20 mm nominal outer dia Pipes                                                                                                                                                                                                                                                                                                                                                                                                                    | Metre    | 20.00  | 537.60      | 10752.00     |
|        |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |          |        |             |              |
| 4.03   | 18.13     | Making connection of G.I. distribution branch with G.I. main of following sizes by providing and fixing tee, including cutting and threading the pipe etc. complete :                                                                                                                                                                                                                                                                            |          |        |             |              |
| a)     | 18.13.1   | 25 to 40 mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                         | Each     | 2.00   | 911.90      | 1823.80      |
|        |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |          |        |             |              |
| 4.04   | 18.16     | Providing and fixing brass stop cock of approved quality :                                                                                                                                                                                                                                                                                                                                                                                       |          |        |             |              |
| a)     | 18.16.1   | 15 mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                               | Each     | 2.00   | 353.25      | 706.50       |
| b)     | 18.16.2   | 20 mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                               | Each     | 2.00   | 379.20      | 758.40       |
|        |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |          |        |             |              |
| 4.05   | 18.17     | Providing and fixing gun metal gate valve with C.I. wheel of approved quality (screwed end) :                                                                                                                                                                                                                                                                                                                                                    |          |        |             |              |
| a)     | 18.17.1   | 25mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                                | Each     | 2.00   | 622.40      | 1244.80      |
| b)     | 18.17.2   | 32mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                                | Each     | 1.00   | 689.6       | 689.60       |
| c)     | 18.17.3   | 40mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                                | Each     | 1.00   | 826.10      | 826.10       |
|        |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |          |        |             |              |
| 4.06   | 18.18     | Providing and fixing ball valve (brass) of approved quality, High or low pressure, with plastic floats complete :                                                                                                                                                                                                                                                                                                                                |          |        |             |              |
| a)     | 18.18.3   | 25 mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                               | Each     | 1.00   | 464.05      | 464.05       |
|        |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |          |        |             |              |
| 4.07   | 18.20     | Providing and fixing brass ferrule with C.I. mouth cover including boring and tapping the main :                                                                                                                                                                                                                                                                                                                                                 |          |        |             |              |
| a)     | 18.20.3   | 25 mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                               | Each     | 2.00   | 486.80      | 973.60       |
|        |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |          |        |             |              |
| 4.08   | 18.21     | Providing and fixing uplasticised PVC connection pipe with brass unions :                                                                                                                                                                                                                                                                                                                                                                        |          |        |             |              |
| a)     | 18.21.2   | 45 cm length                                                                                                                                                                                                                                                                                                                                                                                                                                     |          |        |             |              |
| i)     | 18.21.2.1 | 15 mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                               | Each     | 4.00   | 97.75       | 391.00       |
|        |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |          |        |             |              |
| 4.09   | 18.22     | Providing and fixing C.P. brass shower rose with 15 or 20 mm inlet :                                                                                                                                                                                                                                                                                                                                                                             |          |        |             |              |
| a)     | 18.22.1   | 100 mm diameter                                                                                                                                                                                                                                                                                                                                                                                                                                  | Each     | 2.00   | 193.95      | 387.90       |
|        |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |          |        |             |              |
| 4.10   | 18.48     | Providing and placing on terrace (at all floor levels) polyethylene water storage tank, IS : 12701 marked, with cover and suitable locking arrangement and making necessary holes for inlet, outlet and overflow pipes but without fittings and the base support for tank                                                                                                                                                                        |          |        |             |              |
| a)     | 18.48A    | Rectangular tank                                                                                                                                                                                                                                                                                                                                                                                                                                 | per Lite | 750.00 | 11.00       | 8250.00      |
|        |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |          |        |             |              |
| 4.11   | 18.49     | Providing and fixing C.P. brass bib cock of approved quality conforming to IS:8931 :                                                                                                                                                                                                                                                                                                                                                             |          |        |             |              |
| a)     | 18.49.1   | 15 mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                               | Each     | 4.00   | 506.80      | 2027.20      |
|        |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |          |        |             |              |
| 4.12   | 18.51     | Providing and fixing C.P. brass long body bib cock of approved quality conforming to IS standards and weighing not less than 690 gms.                                                                                                                                                                                                                                                                                                            |          |        |             |              |
| a)     | 18.51.1   | 15 mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                               | Each     | 4.00   | 798.95      | 3195.80      |
|        |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |          |        |             |              |

| S. No. | Ref. No   | Description                                                                                                                                                                                                                                                                                                                                                                                                                 | Unit  | Qty   | DSR 23 Rate | Amount (Rs.)    |
|--------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|-------------|-----------------|
| 1      | 2         | 3                                                                                                                                                                                                                                                                                                                                                                                                                           | 4     | 8     | 9           | 10              |
| 4.13   | 18.52     | Providing and fixing C.P. brass stop cock (concealed) of standard design and of approved make conforming to IS:8931.                                                                                                                                                                                                                                                                                                        |       |       |             |                 |
| a)     | 18.52.1   | 15 mm nominal bore.                                                                                                                                                                                                                                                                                                                                                                                                         | Each  | 2.00  | 670.45      | 1340.90         |
| 4.14   | 18.53     | Providing and fixing C.P. brass angle valve for basin mixer and geyser points of approved quality conforming to IS:8931                                                                                                                                                                                                                                                                                                     |       |       |             |                 |
| a)     | 18.53.1   | 15 mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                          | Each  | 2.00  | 574.30      | 1148.60         |
| 4.15   | 18.58     | Providing and fixing PTMT grating of approved quality and colour.                                                                                                                                                                                                                                                                                                                                                           |       |       |             |                 |
| a)     | 18.58.1   | Circular type.                                                                                                                                                                                                                                                                                                                                                                                                              |       |       |             |                 |
| i)     | 18.58.1.1 | 100 mm nominal dia.                                                                                                                                                                                                                                                                                                                                                                                                         | Each  | 2.00  | 37.60       | 75.20           |
| 4.16   | 18.77     | Cutting holes up to 15x15 cm in R.C.C. floors and roofs for passing drain pipe etc. and repairing the hole after insertion of drain pipe etc. with cement concrete 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size), including finishing complete so as to make it leak proof                                                                                                                 | Each  | 2.00  | 452.00      | 904.00          |
|        |           | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                                                                                                                                    |       |       |             | <b>47546.70</b> |
| 5.00   | 19        | <b>SEWARAGE &amp; DRAINAGE</b>                                                                                                                                                                                                                                                                                                                                                                                              |       |       |             |                 |
| 5.01   | 19.4      | Providing and fixing square-mouth S.W. gully trap class SP-1 complete with C.I. grating brick masonry chamber with water tight C.I. cover with frame of 300 x300 mm size (inside) the weight of cover to be not less than 4.50 kg and frame to be not less than 2.70                                                                                                                                                        |       |       |             |                 |
| a)     | 19.4.2    | 150 x 100 mm size P type                                                                                                                                                                                                                                                                                                                                                                                                    |       |       |             |                 |
| i)     | 19.4.2.1  | With common burnt clay F.P.S. (non modular) bricks of class designation 7.5                                                                                                                                                                                                                                                                                                                                                 | Each  | 2.00  | 2734.20     | 5468.40         |
| 5.02   | 19.21     | Making connection of drain or sewer line with existing manhole including breaking into and making good the walls, floors with cement concrete 1:2:4 mix (1 cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size) cement plastered on both sides with cement mortar 1:3 (1 cement : 3 coarse sand), finished with a floating coat of neat cement and making necessary channels for the drain etc. complete : |       |       |             |                 |
| a)     | 19.21.1   | For pipes 100 to 250 mm diameter                                                                                                                                                                                                                                                                                                                                                                                            | Each  | 2.00  | 810.45      | 1620.90         |
| 5.03   | 19.6      | Providing, laying and jointing non pressure NP2 class (light duty)RCC pipes with collars jointed with stiff mixture of cement mortar in the proportion of 1:2 (1 cement : 2 fine sand) including testing of joints etc. complete :                                                                                                                                                                                          |       |       |             |                 |
| a)     | 19.6.2    | 150 mm dia RCC pipe                                                                                                                                                                                                                                                                                                                                                                                                         | Metre | 10.00 | 556.45      | 5564.50         |
|        |           | <b>Total of sub-head</b>                                                                                                                                                                                                                                                                                                                                                                                                    |       |       |             | <b>12653.80</b> |

| Detail estimate of “Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (UP)” |                              |                   |                  |
|--------------------------------------------------------------------------------------------------------------|------------------------------|-------------------|------------------|
| GUEST HOUSE                                                                                                  |                              |                   |                  |
| SUMMARY OF COST (ELECTRICAL WORK)                                                                            |                              |                   |                  |
|                                                                                                              |                              |                   |                  |
|                                                                                                              |                              |                   |                  |
| SUB<br>HEAD<br>No.                                                                                           | PARTICULARS                  | Amount            |                  |
|                                                                                                              |                              | DSR ITEMS         | NS ITEMS         |
|                                                                                                              |                              |                   |                  |
| I                                                                                                            | WIRING                       | 86,275.03         | 840.27           |
| II                                                                                                           | SUPPLY OF FITTINGS AND FANS  | 7,497.00          | 38,673.40        |
| III                                                                                                          | BOARDS & DISTRIBUTION BOARDS | 19,790.00         | 33,084.41        |
| IV                                                                                                           | EARTHING                     | 12,048.00         | -                |
|                                                                                                              |                              |                   |                  |
|                                                                                                              | <b>TOTAL</b>                 | <b>125,610.03</b> | <b>72,598.08</b> |

**Detail estimate of "Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (UP)"**

**GUEST HOUSE**

**ABSTRACT OF COST (ELECTRICAL WORKS)**

| Sl. No. | DSR-2025 | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                  | UNIT  | QTY.  | RATE (AS PER SR) | RATE (AS PER NS) | AMOUNT (SR ITEMS) | AMOUNT (NS ITEMS) |
|---------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|------------------|------------------|-------------------|-------------------|
| 1.00    |          | <b>SUBHEAD - I - WIRING</b>                                                                                                                                                                                                                                                                                                                                  |       |       |                  |                  |                   |                   |
| 1.01    | 1.10     | Wiring for light point/ fan point/ exhaust fan point/ call bell point with 1.5 sq.mm FRLS PVC insulated copper conductor single core cable in surface / recessed medium class PVC conduit, with modular switch, modular plate, suitable GI box and earthing the point with 1.5 sq.mm FRLS PVC insulated copper conductor single core cable etc. as required. |       |       |                  |                  |                   |                   |
| a)      | 1.10.3   | Group C                                                                                                                                                                                                                                                                                                                                                      | Each  | 12.00 | 1704.00          |                  | 20448.00          | 0.00              |
| 1.02    | 1.12     | Wiring for light/ power plug with 2X4 sq. mm FRLS PVC insulated copper conductor single core cable in surface/ recessed medium class PVC conduit alongwith 1 No. 4 sq. mm FRLS PVC insulated copper conductor single core cable for loop earthing as required.                                                                                               | Metre | 71.06 | 373.00           |                  | 26506.87          | 0.00              |
| 1.03    | 1.27     | Supplying and fixing following size/ modules, GI box alongwith modular base & cover plate for modular switches in recess etc. as required.                                                                                                                                                                                                                   |       |       |                  |                  |                   |                   |
| a)      | 1.27.3   | 4 Module (125 mmX75 mm)                                                                                                                                                                                                                                                                                                                                      | Each  | 4.00  | 401.00           |                  | 1604.00           | 0.00              |
| 1.04    | 1.24     | Supplying and fixing following modular switch/ socket on the existing modular plate & switch box including connections but excluding modular plate etc. as required.                                                                                                                                                                                         |       |       |                  |                  |                   |                   |
| a)      | 1.24.3   | 15/16 A switch                                                                                                                                                                                                                                                                                                                                               | Each  | 4.00  | 176.00           |                  | 704.00            | 0.00              |
| b)      | 1.24.4   | 3 pin 5/6 A socket outlet                                                                                                                                                                                                                                                                                                                                    | Each  | 4.00  | 136.00           |                  | 544.00            | 0.00              |
| c)      | 1.24.6   | Telephone socket outlet                                                                                                                                                                                                                                                                                                                                      | Each  | 1.00  | 168.00           |                  | 168.00            | 0.00              |
| d)      | 1.24.7   | TV antenna socket outlet                                                                                                                                                                                                                                                                                                                                     | Each  | 1.00  | 168.00           |                  | 168.00            | 0.00              |
| 1.05    | 1.7      | Wiring for circuit/ submain wiring alongwith earth wire with the following sizes of FRLS PVC insulated copper conductor, single core cable in surface/ recessed steel conduit as required.                                                                                                                                                                   |       |       |                  |                  |                   |                   |
| (a)     | 1.7.2    | 2 x 2.5 sq.mm + 1 x 2.5 sq.mm earth wire                                                                                                                                                                                                                                                                                                                     | Metre | 16.00 | 414.00           |                  | 6624.00           | 0.00              |
| (b)     | 1.7.5    | <b>2 X 10 sq. mm + 1 X 6 sq. mm earth wire</b>                                                                                                                                                                                                                                                                                                               | Metre | 24.00 | 778.00           |                  | 18672.00          | 0.00              |
| 1.06    | 1.19     | Supplying and drawing co-axial TV cable RG-6 grade, 0.7 mm solid copper conductor PE insulated, shielded with fine tinned copper braid and protected with PVC sheath in the existing surface/ recessed steel/ PVC conduit as required.                                                                                                                       | Metre | 17.54 | 54.00            |                  | 947.16            | 0.00              |
| 1.08    | 1.27     | Supplying and fixing following size/ modules, GI box alongwith modular base & cover plate for modular switches in recess etc. as required.                                                                                                                                                                                                                   |       |       |                  |                  |                   |                   |
| a)      | 1.27.1   | 1 or 2 Module (75 mmX75 mm)                                                                                                                                                                                                                                                                                                                                  | Each  | 1.00  | 354.00           |                  | 354.00            | 0.00              |
| 1.09    | 1.18     | Supplying and drawing following pair 0.5 mm dia FRLS PVC insulated annealed copper conductor, unarmored telephone cable in the existing surface/ recessed steel/ PVC conduit as required.                                                                                                                                                                    |       |       |                  |                  |                   |                   |
| a)      | 1.18.2   | 2 Pair                                                                                                                                                                                                                                                                                                                                                       | Metre | 40.00 | 39.00            |                  | 1560.00           | 0.00              |
| 1.10    | 1.21     | Supplying and fixing of following sizes of medium class PVC conduit along with accessories in surface/recess including cutting the wall and making good the same in case of recessed conduit as required.                                                                                                                                                    |       |       |                  |                  |                   |                   |
| a)      | 1.21.1   | 20 mm                                                                                                                                                                                                                                                                                                                                                        | Metre | 25.00 | 151.00           |                  | 3775.00           | 0.00              |
| b)      | 1.21.2   | 25 mm                                                                                                                                                                                                                                                                                                                                                        | Metre | 25.00 | 168.00           |                  | 4200.00           | 0.00              |
| 1.11    | M . R    | Providing and fixing in position 2mm thick M.S. Telephone junction box of size suitable for fixing of following Krone Tag Block with key lock arrangement. Also provide clamps for fixing tag blocks.                                                                                                                                                        |       |       |                  |                  |                   |                   |
| a)      | a)       | 10 pair Telephone Tag Block with box                                                                                                                                                                                                                                                                                                                         | Each  | 1.00  |                  | 496.55           | 0.00              | 496.55            |
| 1.12    | M . R    | Supplying, laying of 10 pair unarmoured PVC insulated copper conductor (ATC) telephone cable in ground/existing pipes/on wall and making connection with telephone main junction box (MDF) including supports and all accessories as required.                                                                                                               |       |       |                  |                  |                   |                   |
| a)      | a)       | 10 Pair Cable unarmoured                                                                                                                                                                                                                                                                                                                                     | Metre | 2.00  |                  | 171.86           | 0.00              | 343.72            |
|         |          | <b>TOTAL OF SUBHEAD - 1</b>                                                                                                                                                                                                                                                                                                                                  |       |       |                  |                  | <b>86275.03</b>   | <b>840.27</b>     |
| 2.00    |          | <b>SUBHEAD - II - SUPPLY &amp; INSTALLATION OF FITTINGS</b>                                                                                                                                                                                                                                                                                                  |       |       |                  |                  |                   |                   |
| 2.01    | M.R.     | Supplying of following box type FI. fitting made out of CRCA sheet finished in antirust treated non-yellowing super white stove enamelled paint duly wired with copper wound heavy duty choke starter holder, starter but without lamp complete etc. as reqd.                                                                                                |       |       |                  |                  |                   |                   |
| a)      |          | Mounting rail for TLED lamps 1600 Lumens (TMC 501 P 1xT-LED with Essential LED 18W Tube)                                                                                                                                                                                                                                                                     | Each  | 6.00  |                  | 585.35           | 0.00              | 3512.10           |

| SI. No. | DSR-2025 | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | UNIT | QTY.  | RATE (AS PER SR) | RATE (AS PER NS) | AMOUNT (SR ITEMS) | AMOUNT (NS ITEMS) |
|---------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------|------------------|------------------|-------------------|-------------------|
| 2.02    | M.R      | Supplying of wall bracket light fittings suitable for 11 / 13 W CFL lamp. The fitting shall be made up of M.S. powder coated provided with integral ballast, frosted glass and 1 no. 11 / 13 W lamp duly wired upto the connector block complete as required. <b>(Decon Cat. No.05AAM)</b>                                                                                                                                                                                                      | Each | 3.00  |                  | 1170.80          | 0.00              | 3512.40           |
| 2.03    | M.R      | Supplying of ceiling light fittings suitable for 1 x 15/20 W LED lamp. The fitting shall be made up of M.S. powder coated provided with electronic ballast, 1 no. 15/20 W LED lamp duly wired upto the connector block etc. complete as required.                                                                                                                                                                                                                                               |      |       |                  |                  |                   |                   |
| a)      |          | Cirrus Mini Pro 15 / 20 watt & 1100 /1600 Lumens <b>(Philips SM200C LED11S 6500 PSU OD WH)</b>                                                                                                                                                                                                                                                                                                                                                                                                  | Each | 6.00  |                  | 2868.45          | 0.00              | 17210.70          |
| 2.04    | M.R.     | Supplying of bulk head fittings suitable for 10 W LED lamp complete with ballast & accessories such as glass, wire guard, 60 W CFL lamp etc. complete as required.                                                                                                                                                                                                                                                                                                                              |      |       |                  |                  |                   |                   |
| a)      |          | Endural LED-Bulkhead, 10 W, 600 lumen Such as <b>(Philips WT202W LED6S CW PSU S2 PC)</b>                                                                                                                                                                                                                                                                                                                                                                                                        | Each | 2.00  |                  | 1697.60          | 0.00              | 3395.20           |
| 2.05    | M.R.     | Supplying of exhaust fan, all complete with mounting ring frame i/c bracket, but without regulator with shutters in the following sizes. <b>(G.E. ALSTHOM, KHAITAN &amp; HAVELL'S COMPANY)</b>                                                                                                                                                                                                                                                                                                  |      |       |                  |                  |                   |                   |
| a)      |          | 300 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Each | 2.00  |                  | 2400.00          | 0.00              | 4800.00           |
| 2.06    | M . R    | Supplying of 1400 mm sweep A.C. electric Ceiling fans, capacitor type with double ball bearing complete with 300 mm down rod, canopies, shackles, blades, but without regulator suitable for operation on 230 / 240 Volts, 50 Hz, single phase, A.C. supply. <b>(CROMPTON, KHAITAN &amp; HAVELL'S COMPANY)</b>                                                                                                                                                                                  | Each | 3.00  |                  | 2081.00          | 0.00              | 6243.00           |
| 2.07    | 1.25     | Supplying and fixing two module stepped type electronic fan regulator on the existing modular plate switch box including connections but excluding modular plate etc. as required.                                                                                                                                                                                                                                                                                                              | Each | 3.00  | 402.00           |                  | 1206.00           | 0.00              |
| 2.08    | 1.45     | Installation, testing and commissioning of ceiling fan, including wiring the down rods of standard length (upto 30 cm) with 1.5 sq. mm FRLS PVC insulated, copper conductor, single core cable, including providing and fixing phenolic laminated sheet cover on the fan box etc. as required.                                                                                                                                                                                                  | Each | 3.00  | 332.00           |                  | 996.00            | 0.00              |
| 2.09    | 1.41     | Installation, testing and commissioning of pre-wired, light fixture / compact fluorescent fitting of all types, complete with all accessories and tube/lamp etc. directly on ceiling/ wall, including connections with 1.5 sq. mm FRLS PVC insulated, copper conductor, single core cable and earthing etc. as required.                                                                                                                                                                        | Each | 6.00  | 259.00           |                  | 1554.00           | 0.00              |
| 2.10    | 1.50     | Installation of exhaust fan in the existing opening, including making good the damage, connection, testing, commissioning etc. as required.                                                                                                                                                                                                                                                                                                                                                     |      |       |                  |                  |                   |                   |
| a)      | 1.50.1   | Upto 450 mm sweep                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Each | 2.00  | 556.00           |                  | 1112.00           | 0.00              |
| 2.11    | 1.51     | Extra for fixing the louvers/ shutters complete with frame for a exhaust fan of all sizes.                                                                                                                                                                                                                                                                                                                                                                                                      | Each | 2.00  | 260.00           |                  | 520.00            | 0.00              |
| 2.12    | 1.35     | Installation, testing and commissioning of wall bracket /ceiling fittings of all sizes and shapes containing upto two GLS/CFL/ LED lamps per fitting, complete with all accessories including connections etc. as required.                                                                                                                                                                                                                                                                     | Each | 11.00 | 151.00           |                  | 1661.00           | 0.00              |
| 2.13    | 1.38     | Supplying and fixing call bell/ buzzer suitable for single phase, 230 V, complete as required.                                                                                                                                                                                                                                                                                                                                                                                                  | Each | 4.00  | 112.00           |                  | 448.00            | 0.00              |
|         |          | <b>TOTAL OF SUBHEAD - II.</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |       |                  |                  | <b>7497.00</b>    | <b>38673.40</b>   |
| 3.00    |          | <b>SUBHEAD - III - DISTRIBUTION BOARD</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |       |                  |                  |                   |                   |
| 3.01    | M.R.     | Supplying, installing, testing and commissioning of compartmentalised cubical type meter board for installation of single phase meter. The cubical board shall be made of 2mm thick C.R.C.A sheet, duly phosphatised powder coated complete with connection bus bar and following accessories mounted in it<br><b>METER BOARD</b><br>INCOMING :<br>40A TP MCCB having breaking capacity - 25 KA - 1 No.<br>OUTGOING :<br>Space for Single phase energy meter - 4 Nos.<br>25 Amp DP MCB - 4 Nos. | Set  | 1.00  |                  | 27474.35         | 0.00              | 27474.35          |
| 3.02    | M.R.     | Supplying, installing, testing & commissioning of Single Phase Electronic Energy Meter, tested as per Electricity Boards requirement.                                                                                                                                                                                                                                                                                                                                                           | Set  | 2.00  |                  | 2369.51          | 0.00              | 4739.02           |

| Sl. No. | DSR-2025 | DESCRIPTION                                                                                                                                                                                                                                                                                                  | UNIT  | QTY.  | RATE (AS PER SR) | RATE (AS PER NS) | AMOUNT (SR ITEMS) | AMOUNT (NS ITEMS) |
|---------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|------------------|------------------|-------------------|-------------------|
| 3.03    | 2.3      | Supplying and fixing following way, single pole and neutral, sheet steel, MCB distribution board, 240 V, on surface/ recess, complete with tinned copper bus bar, neutral bus bar, earth bar, din bar, interconnections, powder painted including earthing etc. as required. (But without MCB/RCCB/isolator) |       |       |                  |                  |                   |                   |
| a)      | 2.3.2    | 8 way, SPN                                                                                                                                                                                                                                                                                                   | Each  | 2.00  | 2773.00          |                  | 5546.00           | 0.00              |
| 3.04    | 2.12     | Supplying and fixing following rating, double pole, 240 V, isolator in the existing MCB DB complete with connections, testing and commissioning etc. as required.                                                                                                                                            |       |       |                  |                  |                   |                   |
| a)      | 2.12.1   | 40 amps                                                                                                                                                                                                                                                                                                      | Each  | 2.00  | 472.00           |                  | 944.00            | 0.00              |
| 3.05    | 2.14     | Supplying and fixing following rating, double pole, (single phase and neutral), 240 V, residual current circuit breaker (RCCB), having a sensitivity current 30 mA in the existing MCB DB complete with connections, testing and commissioning etc. as required                                              |       |       |                  |                  |                   |                   |
| (b)     | 2.14.1   | 25 amps                                                                                                                                                                                                                                                                                                      | Each  | 2.00  | 2141.00          |                  | 4282.00           | 0.00              |
| 3.06    | M.R.     | Supplying of XLPE insulated, PVC sheathed 1.1 KV grade Aluminium conductor heavy duty armoured cable as per IS : 7098 of size :                                                                                                                                                                              |       |       |                  |                  |                   |                   |
| a)      | a)       | 4 x 16 sq.mm.                                                                                                                                                                                                                                                                                                | Metre | 8.00  |                  | 108.88           | 0.00              | 871.04            |
| 3.07    | 15.14    | Providing, laying and fixing following dia RCC pipe NP2 class (light duty) in ground complete with RCC collars, jointing with cement mortar 1:2 (1 cement : 2 fine sand) including trenching (75 cm deep) and refilling etc. as required for crossing road/walls                                             |       |       |                  |                  |                   |                   |
| a)      | 15.14.1  | 100 mm dia                                                                                                                                                                                                                                                                                                   | Metre | 8.00  | 771.00           |                  | 6168.00           | 0.00              |
| 3.08    | 2.10     | Supplying and fixing 5 A to 32 A rating, 240/415 V, 10 kA, "C" curve, miniature circuit breaker suitable for inductive load of following poles in the existing MCB DB complete with connections, testing and commissioning etc. as required.                                                                 |       |       |                  |                  |                   |                   |
| a)      | 2.10.1   | Single pole                                                                                                                                                                                                                                                                                                  | Each  | 10.00 | 285.00           |                  | 2850.00           | 0.00              |
|         |          | <b>TOTAL OF SUBHEAD - III.</b>                                                                                                                                                                                                                                                                               |       |       |                  |                  | <b>19790.00</b>   | <b>33084.41</b>   |
| 4.00    |          | <b>SUBHEAD - IV - EARTHING</b>                                                                                                                                                                                                                                                                               |       |       |                  |                  |                   |                   |
| 4.01    | 5.2      | Earthing with G.I. earth pipe 4.5 meter long, 40 mm dia including accessories, and providing masonry enclosure with cover plate having locking arrangement and watering pipe etc. with charcoal/ coke and salt as required.                                                                                  | Each  | 1.00  | 7658.00          |                  | 7658.00           | 0.00              |
| 4.02    | 5.12     | Providing and laying earth connection from earth electrode with 6 SWG dia G.I. Wire in 15 mm dia G.I. pipe from earth electrode including connection with G.I. thimble excavation and re-filling as required.                                                                                                | Metre | 10.00 | 313.00           |                  | 3130.00           | 0.00              |
| 4.03    | 5.16     | Providing and fixing 6 SWG dia G.I. wire on surface or in recess for loop earthing as required.                                                                                                                                                                                                              | Metre | 15.00 | 84.00            |                  | 1260.00           | 0.00              |
|         |          | <b>TOTAL OF SUBHEAD - IV</b>                                                                                                                                                                                                                                                                                 |       |       |                  |                  | <b>12048.00</b>   | <b>0.00</b>       |
|         |          | <b>TOTAL (I TO IV)</b>                                                                                                                                                                                                                                                                                       |       |       |                  |                  | <b>125610.03</b>  | <b>72598.08</b>   |
|         |          | <b>G. TOTAL (I TO IV)</b>                                                                                                                                                                                                                                                                                    |       |       |                  |                  |                   | <b>198208.11</b>  |

# **Detail estimate of “Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (U.P)”**

## **SUMMARY OF DEVELOPEMNT WORK**

| Sl.No. | Description                                                                                                                | DSR -2023        | DSR -2025      | Non- DSR       |
|--------|----------------------------------------------------------------------------------------------------------------------------|------------------|----------------|----------------|
| 1      | Dismantling of old SP Shade (11 nos.), its common toilets, 02 nos. septic tanks                                            | 1,815,000        |                |                |
| 2      | CC Road 123.10 mtr.                                                                                                        | 901,901          |                |                |
| 2      | Pathways 31.55 mtr.                                                                                                        | 165,031          |                |                |
| 3      | External Water Supply                                                                                                      | 235,778          |                |                |
| 4      | Drainage-Surface Drain-230x300 mm length 446.80 Rm                                                                         | 1,023,420        |                |                |
| 4.1    | Drainage-Surface Drain-300x450 mm length 123.10                                                                            | 519,509          |                |                |
| 5      | RCC septic Tank -01 no. (100 users)                                                                                        | 676,919          |                |                |
| 6      | External Electrification                                                                                                   |                  |                |                |
|        | (a) HT/LT Panels                                                                                                           |                  |                | 670,000        |
|        | (b) Pole and Cables                                                                                                        |                  |                | 407,948        |
|        | (c) Earthing System                                                                                                        |                  | 355,974        |                |
| 7      | Salvage Value                                                                                                              |                  |                | -500,000       |
|        | <b>Total (A)</b>                                                                                                           | <b>5,337,557</b> | <b>355,974</b> | <b>577,948</b> |
|        | Deduction after using correction factor on DSR-23 & DSR-25 amount on account of GST @ 0.973 as per CPWD OM dt: 08.08.2024. | 5,193,443        |                |                |
|        | <b>Total (B)</b>                                                                                                           | <b>5,193,443</b> | <b>355,974</b> | <b>577,948</b> |
|        | <b>Total</b>                                                                                                               | <b>6,127,365</b> |                |                |
|        | <b>Total In Lacs</b>                                                                                                       | <b>61.27</b>     |                |                |



**Detail estimate of "Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (U.P)"**

## COST OF DEVELOPEMNT WORK

[illegible]

**Detail estimate of "Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (U.P)"**

| S.N.                                                   | DESCRIPTION OF ITEM                                                                                                                                                                                                                                                                                                                                                                                       | DSR-2023 | NOS | L     | B     | H     | QTY   | UNIT | RATE (In Rs.) | AMOUNT (In Rs.) |
|--------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-----|-------|-------|-------|-------|------|---------------|-----------------|
| <b>Analysis of Road 10.00 mtr Length 3.50 mtr wide</b> |                                                                                                                                                                                                                                                                                                                                                                                                           |          |     |       |       |       |       |      |               |                 |
| 1                                                      | Preparation and consolidation of sub grade with power road roller of 8 to 12 tonne capacity after excavating earth to an average of 22.5 cm depth, dressing to camber and consolidating with road roller including making good the undulations etc. and re-rolling the sub grade and disposal of surplus earth with lead upto 50 metres.                                                                  | 16.1     | 1   | 10.00 | 3.50  |       | 35.00 |      |               |                 |
|                                                        |                                                                                                                                                                                                                                                                                                                                                                                                           |          |     |       |       | Total | 35.00 | Sqm  | 218.90        | 7,661.50        |
| 2                                                      | Earth work in excavation by mechanical means (Hydraulic excavator) /manual means in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan), including dressing of sides and ramming of bottoms, lift upto 1.5 m, including getting out the excavated soil and disposal of surplus excavated soil as directed, within a lead of 50 m.                                              | 2.8      |     |       |       |       |       |      |               |                 |
|                                                        | All kinds of soil.                                                                                                                                                                                                                                                                                                                                                                                        | 2.8.1    | 1   | 2     | 10.00 | 0.30  | 1.02  |      |               |                 |
|                                                        |                                                                                                                                                                                                                                                                                                                                                                                                           |          |     |       |       | Total | 1.02  | Cum  | 260.30        | 265.51          |
| 3                                                      | Supplying and stacking at site.                                                                                                                                                                                                                                                                                                                                                                           | 16.3     |     |       |       |       |       |      |               |                 |
|                                                        | 90 mm to 45 mm size stone aggregate                                                                                                                                                                                                                                                                                                                                                                       | 16.3.1   | 1   | 10.00 | 3.50  | 0.13  | 4.55  |      |               |                 |
|                                                        |                                                                                                                                                                                                                                                                                                                                                                                                           |          |     |       |       | Total | 4.55  | Cum  | 2,098.40      | 9,547.72        |
| 4                                                      | 63 mm to 45 mm size stone aggregate                                                                                                                                                                                                                                                                                                                                                                       | 16.3.2   | 1   | 10.00 | 3.50  | 0.10  | 3.50  |      |               |                 |
|                                                        |                                                                                                                                                                                                                                                                                                                                                                                                           |          |     |       |       | Total | 3.50  | Cum  | 1,636.05      | 5,726.18        |
| 5                                                      | stone screening 13.2 mm nominal size                                                                                                                                                                                                                                                                                                                                                                      | 16.3.6   | 1   | 10.00 | 3.50  | 0.01  | 0.35  |      |               |                 |
|                                                        |                                                                                                                                                                                                                                                                                                                                                                                                           |          | 1   | 10.00 | 3.50  | 0.01  | 0.35  |      |               |                 |
|                                                        |                                                                                                                                                                                                                                                                                                                                                                                                           |          |     |       |       |       | 0.70  | Cum  | 2,034.35      | 1,424.05        |
| 6                                                      | Red bajri                                                                                                                                                                                                                                                                                                                                                                                                 | 16.3.8   | 1   | 10.00 | 3.50  | 0.01  | 0.35  |      |               |                 |
|                                                        |                                                                                                                                                                                                                                                                                                                                                                                                           |          | 1   | 10.00 | 3.50  | 0.01  | 0.32  |      |               |                 |
|                                                        |                                                                                                                                                                                                                                                                                                                                                                                                           |          |     |       |       | Total | 0.67  | Cum  | 1,564.90      | 1,048.48        |
| 7                                                      | Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level :                                                                                                                                                                                                                                                        | 4.1      |     |       |       |       |       |      |               |                 |
|                                                        | 1:5:10 (1 cement : 5 coarse sand (zone-III): 10 graded stone aggregate 40 mm nominal size)                                                                                                                                                                                                                                                                                                                | 4.1.10   | 1   | 2     | 10.00 | 0.30  | 0.45  |      |               |                 |
|                                                        |                                                                                                                                                                                                                                                                                                                                                                                                           |          |     |       |       | Total | 0.45  | Cum  | 6,518.60      | 2,933.37        |
| 8                                                      | Laying, spreading and compacting stone aggregate of specified sizes to WBM specifications in uniform thickness, hand picking, rolling with 3 wheeled road / vibratory roller 8-10 tonne capacity in stages to proper grade and camber, applying and brooming requisite type of screening / binding material to fill up interstices of coarse aggregate, watering and compacting to the required density . | 16.4     |     |       |       |       |       |      |               |                 |
|                                                        | Qty same as 63-45 mm size Stone Aggregate                                                                                                                                                                                                                                                                                                                                                                 |          | 1   | 3.50  |       |       | 3.50  |      |               |                 |
|                                                        | Qty same as 90-45 mm size Stone Aggregate                                                                                                                                                                                                                                                                                                                                                                 |          | 1   | 4.55  |       |       | 4.55  |      |               |                 |
|                                                        |                                                                                                                                                                                                                                                                                                                                                                                                           |          |     |       |       | Total | 8.05  | Cum  | 1,046.95      | 8,427.95        |

| S.N. | DESCRIPTION OF ITEM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | DSR-2023 | NOS |   | L     | B    | H     | QTY    | UNIT | RATE (In Rs.) | AMOUNT (In Rs.)   |
|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-----|---|-------|------|-------|--------|------|---------------|-------------------|
| 9    | Providing and laying at or near ground level factory made kerb stone of M-25 grade cement concrete in position to the required line, level and curvature, jointed with cement mortar 1:3 (1 cement: 3 coarse sand), including making joints with or without grooves (thickness of joints except at sharp curve shall not to more than 5mm), including making drainage opening wherever required complete etc. as per direction of Engineer-in-charge (length of finished kerb edging shall be measured for payment). (Precast C.C. kerb stone shall be approved by Engineer-in charge). | 16.69    | 1   | 2 | 10.00 | 0.15 | 0.45  | 1.35   |      |               |                   |
|      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |          |     |   |       |      | Total | 1.35   | Cum  | 10,117.60     | 13,658.76         |
|      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |          |     |   |       |      |       |        |      |               |                   |
| 10   | Providing and laying C.C. pavement of mix M-25 with ready mixed concrete from batching plant. The ready mixed concrete shall be laid and finished with screed board vibrator , vacuum dewatering process and finally finished by floating, brooming with wire brush etc. complete as per specifications and directions of Engineer-incharge. (The panel shuttering work shall be paid for separately). (Note:- Cement content considered in this item is @ 330 kg/cum. Excess/less cement used as per design mix is payable/ recoverable separately).                                   | 16.75    |     |   |       |      |       |        |      |               |                   |
|      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |          |     | 1 | 10.00 | 3.50 | 0.15  | 5.25   |      |               |                   |
|      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |          |     |   |       |      | Total | 5.25   | Cum  | 9,823.80      | 51,574.95         |
|      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |          |     |   |       |      |       |        |      |               |                   |
| 11   | Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth level.                                                                                                                                                                                                                                                                                                                                                                                                                                          | 5.22     |     |   |       |      |       |        |      |               |                   |
|      | Thermo-Mechanically Treated bars of grade Fe-500D or more.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 5.22.6   | 1   | 1 | 1.00  | 5.25 | 40.00 | 210.00 |      |               |                   |
|      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |          |     |   |       |      | Total | 210.00 | Kg   | 107.85        | 22,648.50         |
|      | <b>Total Cost for 35.00 Sqm</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |          |     |   |       |      |       |        |      |               | <b>124,916.97</b> |
|      | <b>Cost For Per Sqm Area</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |          |     |   |       |      |       |        |      |               | <b>3,569.06</b>   |

[illegible]

| BILL OF QUANTITIES- External Water Supply |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |       |           |            |                       |                              |         |                          |                        |           |
|-------------------------------------------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-----------|------------|-----------------------|------------------------------|---------|--------------------------|------------------------|-----------|
| S. No                                     | Item No.  | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | UNIT  | Total Qty | DSR - 2023 | Rate with CF<br>0.973 | Rate with CF<br>0.974*1.0633 | Rate-NS | DSR-2023 Amount<br>Civil | DSR-2025 Amount<br>E/M | NS Amount |
|                                           |           | <b>SUB HEAD (I) :- EXTERNAL WATER SUPPLY PIPES AND FITTINGS</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |       |           |            |                       |                              |         |                          |                        |           |
| <b>SECTION I</b>                          |           | <b>DISTRIBUTION NETWORK FOR FRESH WATER SUPPLY</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |       |           |            |                       |                              |         |                          |                        |           |
| 1                                         | 18.7      | Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply, including all CPVC plain & brass threaded fittings, including fixing the pipe with clamps at 1.00 m spacing. This includes jointing of pipes & fittings with one step CPVC solvent cement and testing of joints complete as per direction of Engineer in Charge.                                                                                                                                                                                                                                           |       |           |            |                       |                              |         |                          |                        |           |
|                                           |           | External work                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |       |           |            |                       |                              |         |                          |                        |           |
|                                           | 18.7.3    | 25 mm dia nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Metre | 50.00     | 401.55     |                       |                              |         | 20,077.50                |                        |           |
|                                           | 18.7.4    | 32 mm dia nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Metre | 30.00     | 518.75     |                       |                              |         | 15,562.50                |                        |           |
|                                           | 18.7.5    | 40 mm dia nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Metre | 20.00     | 702.95     |                       |                              |         | 14,059.00                |                        |           |
|                                           | 18.7.6    | 50 mm dia nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Metre | 15.00     | 934.15     |                       |                              |         | 14,012.25                |                        |           |
|                                           |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |       |           |            |                       |                              |         | -                        |                        |           |
| 2                                         | 18.59     | Providing and fixing <b>C.I. double acting air valve</b> of approved quality with bolts, nuts, rubber insertions etc. complete (The tail pieces, tapers etc if required will be paid separately) :                                                                                                                                                                                                                                                                                                                                                                                                                                 |       |           |            |                       |                              |         |                          |                        |           |
|                                           | 18.59.1   | 50 mm dia                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Each  | 2.00      | 5748.80    |                       |                              |         | 11,497.60                |                        |           |
| 3                                         | 18.17     | Providing and fixing <b>gun metal gate valve with C.I. wheel</b> of approved quality (screwed end) :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |       |           |            |                       |                              |         |                          |                        |           |
|                                           | 18.17.1A  | 20 mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Each  | 1.00      | 539.95     |                       |                              |         | 539.95                   |                        |           |
|                                           | 18.17.1   | 25 mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Each  | 1.00      | 622.40     |                       |                              |         | 622.40                   |                        |           |
|                                           | 18.17.2   | 32 mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Each  | 1.00      | 689.60     |                       |                              |         | 689.60                   |                        |           |
|                                           | 18.17.3   | 40 mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Each  | 2.00      | 826.10     |                       |                              |         | 1,652.20                 |                        |           |
|                                           | 18.17.4   | 50 mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Each  | 2.00      | 1026.65    |                       |                              |         | 2,053.30                 |                        |           |
|                                           | 18.17.5   | 65 mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Each  | 2.00      | 1742.15    |                       |                              |         | 3,484.30                 |                        |           |
|                                           | 18.17.6   | 80 mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Each  | 5.00      | 2604.55    |                       |                              |         | 13,022.75                |                        |           |
| 4                                         | 4.1.3     | 1:2:4 (1 cement : 2 coarse sand (zone-III) derived from natural sources : 4 graded stone aggregate 20 mm nominal size derived from natural sources)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Cum   | 6.10      | 7878.50    |                       |                              |         | 48,058.85                |                        |           |
| 5                                         | 18.46     | Providing and fixing <b>G.I. Union</b> in GI pipe including cutting and threading the pipe and making long screws etc. complete(New work)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |           |            |                       |                              |         |                          |                        |           |
|                                           | 18.46.7   | 65 mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Each  | 2.00      | 1136.80    |                       |                              |         | 2,273.60                 |                        |           |
|                                           | 18.46.8   | 80 mm nominal bore                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Each  | 2.00      | 1207.95    |                       |                              |         | 2,415.90                 |                        |           |
| 6                                         | 19.19     | Providing and fixing in position pre-cast <b>R.C.C. manhole cover and frame</b> of required shape and approved quality                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |       |           |            |                       |                              |         |                          |                        |           |
|                                           | 19.19.1   | LD- 2.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |       |           |            |                       |                              |         |                          |                        |           |
|                                           | 19.19.1.1 | Rectangular shape 600*450 mm internal dimensions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Each  | 6.00      | 1437.65    |                       |                              |         | 8,625.90                 |                        |           |
| 7                                         | 18.32     | Constructing masonry <b>gate valve Chamber 30x30x50 cm</b> inside, in brick work in cement mortar 1:4 (1 cement :4 coarse sand) for stop cock, with C. I. surface box 100x100 x75 mm (inside) with hinged cover fixed in cement concrete slab 1:2:4 mix (1 cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size), i/c necessary excavation, foundation concrete 1:5:10 ( 1 cement : 5 fine sand : 10 graded stone aggregate 40mm nominal size ) and inside plastering with cement mortar 1:3 (1 cement : 3 coarse sand) 12mm thick, finished with a floating coat of neat cement complete as per standard design : |       |           |            |                       |                              |         |                          |                        |           |
|                                           | 18.32.1   | With common burnt clay F.P.S.(non modular) bricks of class designation 7.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Each  | 6.00      | 1992.60    |                       |                              |         | 11,955.60                |                        |           |

| S. No | Item No. | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | UNIT                 | Total Qty | DSR - 2023 | Rate with CF<br>0.973 | Rate with CF<br>0.974*1.0633 | Rate-NS | DSR-2023 Amount<br>Civil | DSR-2025 Amount<br>E/M | NS Amount |
|-------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|-----------|------------|-----------------------|------------------------------|---------|--------------------------|------------------------|-----------|
| 8     | 18.33    | Constructing masonry <b>Chamber 60x45x50 cm inside</b> , in brick work in cement mortar 1:4 (1 cement : 4 coarse sand) for water meter complete with C.I. double flap surface box 400x200x200 mm (inside) with locking arrangement and RCC top slab 1:2:4 mix (1 cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size), i/c necessary excavation, foundation concrete 1:5:10 (1 cement : 5 fine sand:10 graded stone aggregate 40 mm nominal size) and inside plastering with cement mortar 1:3 (1 cement : 3 coarse sand) 12 mm thick, finished with a floating coat of neat cement complete as per standard design : |                      |           |            |                       |                              |         |                          |                        |           |
|       | 18.33.1  | with common burnt clay F.P.S.(non module) brick of class designation 7.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Each                 | 6.00      | 10862.40   |                       |                              |         | 65,174.40                |                        |           |
|       |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                      |           |            |                       |                              |         |                          |                        |           |
|       |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <b>TOTAL SECTION</b> |           |            |                       |                              |         | <b>235,778</b>           |                        | -         |

| Detail estimate of "Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (U.P)" |                                    |        |      |              |                     |
|---------------------------------------------------------------------------------------------------------------|------------------------------------|--------|------|--------------|---------------------|
| <u>BILL OF QUANTITY FOR INTERNAL DRAIN</u>                                                                    |                                    |        |      |              |                     |
| S.N.                                                                                                          | DESCRIPTION OF ITEM                | QTY    | UNIT | RATE RS.     | AMOUNT RS.          |
| 1                                                                                                             | COST FOR DRAIN 230mm X 300mm depth | 446.80 | Rm   | 2,290.55     | 1,023,419.75        |
|                                                                                                               |                                    |        |      |              |                     |
| 2                                                                                                             | COST FOR DRAIN 300mm X 450mm depth | 133.00 | Rm   | 3,906.08     | 519,508.64          |
|                                                                                                               |                                    |        |      |              |                     |
|                                                                                                               |                                    |        |      | <b>TOTAL</b> | <b>1,542,928.39</b> |
|                                                                                                               |                                    |        |      |              |                     |

**Detail estimate of "Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (U.P)"**

### Analysis of Rate for Drain (230mm x 300mm)

[illegible]



Detail estimate of "Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (U.P)"

|                                                  |
|--------------------------------------------------|
| Analysis of Rate for Drain (300mm x 450mm depth) |
|--------------------------------------------------|

[illegible]

| Detail estimate of "Conversion of Staff Quarters in SP Sheds to regular staff quarters<br>at JNV Azamgarh (U.P)" |                             |                   |
|------------------------------------------------------------------------------------------------------------------|-----------------------------|-------------------|
| Cost of Septic Tank                                                                                              |                             |                   |
| S.N.                                                                                                             | DESCRIPTION OF WORK         |                   |
| 1                                                                                                                | Septic Tank 100 User (1 no) | 676,918.88        |
|                                                                                                                  |                             |                   |
|                                                                                                                  | <b>Total</b>                | <b>676,918.88</b> |

**Detail estimate of "Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (U.P)"**

**ABSTRACT FOR SEPTIC TANK 100 USERS**

| S.No. | DSR-23   | Description                                                                                                                                                                                                                                                                                                                                                   | Qty       | Unit  | Rate     | Amount     |
|-------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------|----------|------------|
| 1     | 2.6      | Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan) including dressing of sides and ramming of bottoms, lift up to 1.5 m, including getting out the excavated soil and disposal of surplus excavated soil as directed, within a lead of 50 m. |           |       |          |            |
|       | 2.6.1    | All kinds of soil. 0.00-1.50m                                                                                                                                                                                                                                                                                                                                 | 50.230    | Cum   | 177.50   | 8,915.83   |
| 2     | 2.26.1   | Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan) including dressing of sides and ramming of bottoms, lift up to 1.5 m, including getting out the excavated soil and disposal of surplus excavated soil as directed, within a lead of 50 m. |           |       |          |            |
|       |          | All kinds of soil. 1.50-3.00m                                                                                                                                                                                                                                                                                                                                 | 38.510    | Cum   | 126.80   | 4,883.07   |
| 3     | 2.25     | Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20cm in depth, consolidating each deposited layer by ramming and watering, lead up to 50 m and lift up to 1.5 m.                                                                                                                    | 22.190    | Cum   | 196.00   | 4,349.24   |
| 4     | 4.1      | Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level :                                                                                                                                                                                                            |           |       |          |            |
|       | 4.1.10   | 1:5:10 (1 cement : 5 coarse sand (zone-III): 10 graded stone aggregate 40 mm nominal size).                                                                                                                                                                                                                                                                   | 1.710     | Cum   | 6,518.60 | 11,146.81  |
| 5     | 5.1      | Providing and laying in position specified grade of reinforced cement concrete excluding the cost of centering, shuttering, finishing and reinforcement - All work up to plinth level:                                                                                                                                                                        |           |       |          |            |
|       | 5.1.2    | 1:1.5:3 (1 cement : 1.5 coarse sand : 3 graded stone aggregate 20 mm nominal size)                                                                                                                                                                                                                                                                            | 19.150    | Cum   | 9,045.75 | 173,226.11 |
| 6     | 5.9      | Centering and shuttering including strutting, propping etc. and removal of form for:                                                                                                                                                                                                                                                                          |           |       |          |            |
| a)    | 5.9.1    | Foundations, footings, bases of columns, etc. for mass concrete.                                                                                                                                                                                                                                                                                              | 7.060     | Sqm   | 392.15   | 2,768.58   |
| b)    | 5.9.2    | Walls (any thickness) including attached pilasters, buttresses, plinth and string courses etc.                                                                                                                                                                                                                                                                | 103.530   | Sqm   | 842.50   | 87,224.03  |
| 7     | 5.9.3    | Suspended floors, roofs, landings, balconies and access platform.                                                                                                                                                                                                                                                                                             | 11.970    | Sqm   | 927.25   | 11,099.18  |
| 8     | 5.9.5    | Lintels, beams, plinth beams, girders, bressumers and cantilevers.                                                                                                                                                                                                                                                                                            | 3.486     | Sqm   | 736.40   | 2,567.09   |
| 9     | 5.9.16   | Edges of slabs and breaks in floors and walls.                                                                                                                                                                                                                                                                                                                |           |       |          |            |
|       | 5.9.16.1 | Under 20 cm wide                                                                                                                                                                                                                                                                                                                                              | 18.320    | Meter | 208.55   | 3,820.64   |
| 10    | 5.22     | Reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete.                                                                                                                                                                                                                                        |           |       |          |            |
|       | 5.22.6   | Thermo-Mechanically Treated bars.                                                                                                                                                                                                                                                                                                                             | 2,776.750 | Kg    | 107.85   | 299,472.49 |

| S.No. | DSR-23    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Qty    | Unit  | Rate      | Amount            |
|-------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-------|-----------|-------------------|
| 11    | 11.3      | Cement concrete flooring 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate) finished with a floating coat of neat cement, including cement slurry, but excluding the cost of nosing of steps etc. complete.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |        |       |           |                   |
|       | 11.3.1    | 40 mm thick with 20 mm nominal size stone aggregate                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 11.970 | Sqm   | 614.20    | 7,351.97          |
|       |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |        |       |           |                   |
| 12    | 13.16     | 6 mm cement plaster of mix :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |        |       |           |                   |
|       | 13.16.1   | 1:3 (1 cement : 3 fine sand)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 63.190 | Sqm   | 300.45    | 18,985.44         |
|       |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |        |       |           |                   |
| 13    | 19.19     | Providing and fixing in position pre-cast R.C.C. manhole cover and frame of required shape and approved quality                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |        |       |           |                   |
|       | 19.19.3   | HD-20                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |        |       |           |                   |
|       | 19.19.3.1 | Circular shape 560 mm internal diameter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 2.00   | Nos   | 1,675.70  | 3,351.40          |
|       |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |        |       |           |                   |
| 14    | 19.16     | Providing orange colour safety foot rest of minimum 6 mm thick plastic encapsulated as per IS : 10910 on 12mm dia steel bar conforming to IS : 1786 having minimum cross section as 23 mmx25mm and over all minimum length 263 mm and width as 165mm with minimum 112 mm space between protruded legs having 2 mm tread on top surface by ribbing or chequering besides necessary and adequate anchoring projections on tail length on 138 mm as per standard drawing and suitable to with stand the bend test and chemical resistance test as per specifications and having manufacture's permanent identification mark to be visible even after fixing, including fixing in manholes with 30x20x15 cm cement concrete block 1:3:6 (1 cement : 3 coarse sand : 6 graded stone aggregate 20 mm nominal size) complete as per design. | 12.000 | Nos   | 553.70    | 6,644.40          |
|       |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |        |       |           |                   |
| 15    | 17.35     | Providing and fixing soil, waste and vent pipes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |        |       |           |                   |
|       | 17.35.1   | 100 mm dia.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |        |       |           |                   |
|       | 17.35.1.2 | Centrifugally cast (spun) iron socketed pipe as per IS: 3989.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 3.600  | Meter | 1,180.75  | 4,250.70          |
|       |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |        |       |           |                   |
| 16    | 19.32     | Making soak pit 2.5 m diameter 3.0 metre deep with 45 x 45 cm dry brick honey comb shaft with bricks and S.W. drain pipe 100 mm diameter, 1.8 m long complete as per standard design.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |        |       |           |                   |
|       | 19.32.1   | With common burnt clay F.P.S. (non modular) bricks of class designation 7.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 1.000  | Nos   | 26,861.90 | 26,861.90         |
|       |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |        |       |           |                   |
|       |           | <b>Cost for 1 Nos Septic Tank</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |        |       |           | <b>676,918.88</b> |

| Detail estimate of "Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (U.P)" |                                                                                                                                          |     |      |            |            |
|---------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|-----|------|------------|------------|
| ESTIMATE FOR H.T/L.T. PANEL & FEEDER PILLARS                                                                  |                                                                                                                                          |     |      |            |            |
| S.No.                                                                                                         | Name of Item                                                                                                                             | Qty | Unit | Rate       | Amount     |
| 1                                                                                                             | <b>MAIN LT PANEL</b>                                                                                                                     |     |      |            |            |
|                                                                                                               | <b>Incoming</b>                                                                                                                          |     |      |            |            |
|                                                                                                               | MCCB 630A 50KA TPN                                                                                                                       | 1   | Nos  |            |            |
|                                                                                                               | 630AMP SPREADER TERMINAL                                                                                                                 | 1   | SETS |            |            |
|                                                                                                               | <b>Metering</b>                                                                                                                          |     |      |            |            |
|                                                                                                               | 6Amp MCB SP                                                                                                                              | 3   | Nos  |            |            |
|                                                                                                               | VAF METER                                                                                                                                | 1   | Nos  |            |            |
|                                                                                                               | INDICATION LIGHT                                                                                                                         | 3   | Nos  |            |            |
|                                                                                                               | 400/5A CT's                                                                                                                              | 3   | Nos  |            |            |
|                                                                                                               | <b>Out going</b>                                                                                                                         |     |      |            |            |
|                                                                                                               | Sub Panel-1 MCCB 200A 25KA TPN                                                                                                           | 1   | Nos  |            |            |
|                                                                                                               | Sub Panel-2 MCCB 200A 25KA TPN                                                                                                           | 1   | Nos  |            |            |
|                                                                                                               | School Building MCCB 160A 25KA TPN                                                                                                       | 1   | Nos  |            |            |
|                                                                                                               | Boys Dormitory MCCB 160A 25KA TPN                                                                                                        | 4   | Nos  |            |            |
|                                                                                                               | Emergency Panel MCCB 160A 25KA TPN                                                                                                       | 1   | Nos  |            |            |
|                                                                                                               | Kitchen MCCB 100A 35KA TPN                                                                                                               | 1   | Nos  |            |            |
|                                                                                                               | Principal Residence MCCB 63A 10KA TPN                                                                                                    | 1   | Nos  |            |            |
|                                                                                                               | Guest House MCCB 63A 10KA TPN                                                                                                            | 1   | Nos  |            |            |
|                                                                                                               | Spare MCCB 160A 25KA TPN                                                                                                                 | 1   | Nos  |            |            |
|                                                                                                               | <b>BUS-BAR FEEDERS</b>                                                                                                                   |     |      |            |            |
|                                                                                                               | 400AMP ALU.BUS-BAR TPN                                                                                                                   | 1   | SETS |            |            |
|                                                                                                               | <b>ENCLOSURE</b>                                                                                                                         |     |      |            |            |
|                                                                                                               | 2175*1100*300 (27SFT)                                                                                                                    |     |      |            |            |
|                                                                                                               | PANEL BODY FABRICATED IN 14/16 SWG CRCA SHEET , POWDER COA- TED IN SIEMENCE GREY COLOUR COMPLETE IN ALL RESPECTS UNIVERSAL GLAND PLATES. | 1   | Set  | 360,000.00 | 360,000.00 |
| 2                                                                                                             | <b>EMERGENCY SUPPLY PANEL</b>                                                                                                            |     |      |            |            |
|                                                                                                               | <b>Incoming</b>                                                                                                                          |     |      |            |            |
|                                                                                                               | 320A MCCB 35 KA TPN                                                                                                                      | 1   | Nos  |            |            |
|                                                                                                               | INDICATION LIGHT                                                                                                                         | 3   | Nos  |            |            |
|                                                                                                               | <b>Out going</b>                                                                                                                         |     |      |            |            |
|                                                                                                               | School Building 63A DP                                                                                                                   | 1   | Nos  |            |            |
|                                                                                                               | Boys Dormitory 63A DP                                                                                                                    | 4   | Nos  |            |            |
|                                                                                                               | Pump House 63A MCCB 35KA TPN                                                                                                             | 1   | Nos  |            |            |
|                                                                                                               | Road Light 100A MCCB 35KA TPN                                                                                                            | 3   | Nos  |            |            |
|                                                                                                               | Kitchen 32A DP                                                                                                                           | 1   | Nos  |            |            |
|                                                                                                               | Principal Residence 32A DP                                                                                                               | 1   | Nos  |            |            |
|                                                                                                               | Guest House 32A DP                                                                                                                       | 1   | Nos  |            |            |
|                                                                                                               | SPARE MCCB 100A                                                                                                                          | 1   | Nos  |            |            |
|                                                                                                               | <b>BUS-BAR FEEDERS</b>                                                                                                                   |     |      |            |            |
|                                                                                                               | 320AMP ALU.BUS-BAR TPN                                                                                                                   | 1   | SETS |            |            |
|                                                                                                               | <b>ENCLOSURE</b>                                                                                                                         | 1   | SETS |            |            |
|                                                                                                               | 1050*1725*300 (20.12SFT)                                                                                                                 |     |      |            |            |
|                                                                                                               | PANEL BODY FABRICATED IN 14/16 SWG CRCA SHEET , POWDER COA- TED IN SIEMENCE GREY COLOUR COMPLETE IN ALL RESPECTS UNIVERSAL GLAND PLATES. | 1   | Set  | 160,000.00 | 160,000.00 |
| 3                                                                                                             | <b>APFC PANEL 100 KVAR</b>                                                                                                               | 1   | Set  | 115,000.00 | 77,000.00  |
| 4                                                                                                             | <b>METER PANEL (T2 G+1)</b>                                                                                                              |     |      |            |            |

| S.No. | Name of Item                                                                                                                             | Qty | Unit | Rate       | Amount            |
|-------|------------------------------------------------------------------------------------------------------------------------------------------|-----|------|------------|-------------------|
|       | <b><u>Incoming</u></b>                                                                                                                   |     |      |            |                   |
|       | MCB 63A 10 KA TPN                                                                                                                        | 1   | Nos  |            |                   |
|       | Indication light R,Y,B                                                                                                                   | 3   | Nos  |            |                   |
|       | <b>BUS-BAR FEEDERS</b>                                                                                                                   |     |      |            |                   |
|       | 100AMP ALU.BUS-BAR TPN                                                                                                                   | 1   | SETS |            |                   |
|       | <b><u>Out going</u></b>                                                                                                                  |     |      |            |                   |
|       | Single Phase Energy Meter                                                                                                                | 4   | Nos  |            |                   |
|       | MCB 25A DP                                                                                                                               | 4   | Nos  |            |                   |
|       | <b><u>Emergency Section</u></b>                                                                                                          |     |      |            |                   |
|       | <b><u>Incoming</u></b>                                                                                                                   |     |      |            |                   |
|       | MCCB 32A DP                                                                                                                              | 1   | Nos  |            |                   |
|       | <b><u>Out going</u></b>                                                                                                                  |     |      |            |                   |
|       | 16A DP                                                                                                                                   | 4   | Nos  |            |                   |
|       | <b>ENCLOSURE</b>                                                                                                                         | 1   | Set  |            |                   |
|       | <b>900*1150*200 (9SFT)</b>                                                                                                               |     |      |            |                   |
|       | PANEL BODY FABRICATED IN 14/16 SWG CRCA SHEET , POWDER COA- TED IN SIEMENCE GREY COLOUR COMPLETE IN ALL RESPECTS UNIVERSAL GLAND PLATES. | 1   | Set  | 42,500.00  | 42,500.00         |
|       |                                                                                                                                          |     |      |            |                   |
|       |                                                                                                                                          |     |      |            |                   |
| 5     | <b>METER PANEL (Guest House)</b>                                                                                                         |     |      |            |                   |
|       | <b><u>Incoming</u></b>                                                                                                                   |     |      |            |                   |
|       | MCB 63A 10 KA TPN                                                                                                                        | 1   | Nos  |            |                   |
|       | Indication light R,Y,B                                                                                                                   | 3   | Nos  |            |                   |
|       | <b>BUS-BAR FEEDERS</b>                                                                                                                   |     |      |            |                   |
|       | 100AMP ALU.BUS-BAR TPN                                                                                                                   | 1   | SETS |            |                   |
|       | <b><u>Out going</u></b>                                                                                                                  |     |      |            |                   |
|       | Single Phase Energy Meter                                                                                                                | 2   | Nos  |            |                   |
|       | MCB 25A DP                                                                                                                               | 2   | Nos  |            |                   |
|       | <b><u>Emergency Section</u></b>                                                                                                          |     |      |            |                   |
|       | <b><u>Incoming</u></b>                                                                                                                   |     |      |            |                   |
|       | MCCB 32A DP                                                                                                                              | 1   | Nos  |            |                   |
|       | <b><u>Out going</u></b>                                                                                                                  |     |      |            |                   |
|       | 16A DP                                                                                                                                   | 2   | Nos  |            |                   |
|       | <b>ENCLOSURE</b>                                                                                                                         | 1   | Set  |            |                   |
|       | <b>900*1150*200 (9SFT)</b>                                                                                                               |     |      |            |                   |
|       | PANEL BODY FABRICATED IN 14/16 SWG CRCA SHEET , POWDER COA- TED IN SIEMENCE GREY COLOUR COMPLETE IN ALL RESPECTS UNIVERSAL GLAND PLATES. | 1   | Set  | 30,500.00  | 30,500.00         |
|       |                                                                                                                                          |     |      |            |                   |
|       | <b>TOTAL</b>                                                                                                                             |     |      |            | <b>670,000.00</b> |
|       |                                                                                                                                          |     |      |            |                   |
|       | <b>MAIN LT PANEL</b>                                                                                                                     | 1   | Set  | 360,000.00 | 360,000.00        |
|       | <b>EMERGENCY SUPPLY PANEL</b>                                                                                                            | 1   | Set  | 160,000.00 | 160,000.00        |
|       | <b>APFC PANEL 100 KVAR</b>                                                                                                               | 1   | Set  | 77,000.00  | 77,000.00         |
|       | <b>METER PANEL (T2 G+1)</b>                                                                                                              | 1   | Set  | 42,500.00  | 42,500.00         |
|       | <b>METER PANEL (Guest House)</b>                                                                                                         | 1   | Set  | 30,500.00  | 30,500.00         |
|       |                                                                                                                                          |     |      |            |                   |
|       |                                                                                                                                          |     |      |            | <b>670,000.00</b> |

**Detail estimate of "Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (U.P)"**


**ESTIMATE FOR EXTERNAL ELECTRIFICATION**

| S.No. | Name of Item                                                                                                                                                                                                                                                                     | Qty    | Unit | Rate      | Amount            |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|------|-----------|-------------------|
| 1     | Supply installation, testing and commissioning of external post top lantern with following and complete as required.                                                                                                                                                             |        |      |           |                   |
| a)    | 6m high (5.0m above ground) SP 4 STEEL pole as approved, adopting socket at top for fixture mentioned below, base plate 300x300x6mm and provision for mounting junction box etc.- 1 set                                                                                          | 4      | Nos  | 11,070.00 | 44,280.00         |
| c)    | Erection of Pole in cement concrete 400x400x1000mm deep 1:3:6 ratio cement concrete foundation including excavation , refilling, secured with holding clamps, bolts, nuts, alignment of poles casting etc. including 100 mm thick lean concrete shall be provided at the bottom. | 4      | Set  | 5,500.00  | 22,000.00         |
| d)    | LED type 50 Watt (Street Light) light fittings of all types with all accessories.                                                                                                                                                                                                | 4      | Nos  | 7,897.50  | 31,590.00         |
| f)    | Suitable size Control box with 1 no. incoming and 2 nos. outgoing terminals and 2 nos. tap-out terminal with 1 no.5A HRC fuses complet 1 set                                                                                                                                     | 4      | Nos  | 1,750.00  | 7,000.00          |
| g)    | Suitable number (S) 40mm dia Class-B GI Pipes(s) from above control box to upto 0.5 meter below ground level for power cable entry.                                                                                                                                              | 4      | Nos  | 1,000.00  | 4,000.00          |
|       | <b><u>LT CABLES</u></b>                                                                                                                                                                                                                                                          |        |      |           |                   |
| 2     | Supply of following size of 1.1 KV grade multicore aluminium conductor PVC sheathed armoured cable as per IS 1554.                                                                                                                                                               |        |      |           |                   |
|       | 3.5 Core 300 Sqmm                                                                                                                                                                                                                                                                | 55.00  | Rmt. | 2479.36   | 136,364.80        |
|       | 4 Core 25 Sqmm                                                                                                                                                                                                                                                                   | 45.00  | Rmt. | 348.16    | 15,667.20         |
|       | 4 Core 16 Sqmm                                                                                                                                                                                                                                                                   | 100.00 | Rmt. | 266.24    | 26,624.00         |
|       | 3.5 Core 240 Sqmm                                                                                                                                                                                                                                                                | 20.00  | Rmt. | 2,060.80  | 41,216.00         |
|       | 3.5 Core 95 Sqmm                                                                                                                                                                                                                                                                 | 25.00  | Rmt. | 880.64    | 22,016.00         |
|       | 2 Core 120 Sqmm                                                                                                                                                                                                                                                                  | 48.00  | Rmt. | 719.36    | 34,529.28         |
|       | 2 Core 50 Sqmm                                                                                                                                                                                                                                                                   | 25.00  | Rmt. | 353.28    | 8,832.00          |
|       | 2 Core 16 Sqmm                                                                                                                                                                                                                                                                   | 26.00  | Rmt. | 197.12    | 5,125.12          |
|       | 2 Core 10 Sqmm                                                                                                                                                                                                                                                                   | 50.00  | Rmt. | 174.08    | 8,704.00          |
|       | <b>Total</b>                                                                                                                                                                                                                                                                     |        |      |           | <b>407,948.40</b> |

| Detail estimate of "Conversion of Staff Quarters in SP Sheds to regular staff quarters at JNV Azamgarh (U.P)" |        |                                                                                                                                                                                                                                                                                                |       |      |           |           |
|---------------------------------------------------------------------------------------------------------------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----------|-----------|
| ESTIMATE FOR EXTERNAL ELECTRIFICATION                                                                         |        |                                                                                                                                                                                                                                                                                                |       |      |           |           |
| S.No.                                                                                                         | DSR-25 | Name of Item                                                                                                                                                                                                                                                                                   | Qty   | Unit | Rate      | Amount    |
|                                                                                                               |        | <b><u>G.I. Earth pipe electrode with salt/charcoal:</u></b>                                                                                                                                                                                                                                    |       |      |           |           |
| 1                                                                                                             | 5.6    | Earthing with copper earth plate 600 mm X 600 mm X 3 mm thick including accessories, and providing masonry enclosure with cover plate having locking arrangement and watering pipe of 2.7 meter long etc. with charcoal/ coke and salt as required.                                            | 1     | Set  | 15,004.00 | 15,004.00 |
|                                                                                                               |        |                                                                                                                                                                                                                                                                                                |       |      |           | -         |
| 2                                                                                                             | 5.2    | Earthing with GI earth pipe 4.50 meter long 40mm dia including accessories, and providing masonry enclosure with cover plate having locking arrangement and watering pipe etc.with charcoal or coke and salt complete as required.                                                             | 1     | Set  | 7,658.00  | 7,658.00  |
|                                                                                                               |        |                                                                                                                                                                                                                                                                                                |       |      |           |           |
| 3                                                                                                             | 5.4    | Earthing with GI earth plate 600 x 600 x 3mm thick including accessories, and providing masonry enclosure with cover plate having locking arrangement and watering pipe etc.ith watering pipe of 2.7 meter long etc. with charcoal or coke and salt complete as required. (for MLTP & DG body) | 1     | Set  | 8,351.00  | 8,351.00  |
|                                                                                                               |        |                                                                                                                                                                                                                                                                                                |       |      |           | -         |
| 4                                                                                                             | 5.10   | Providing and fixing 25 mm x 5 mm copper strips in 40 mm dia G.I.pipe from earth electrode, including connection with brass nut bolts , spring washer, excavation and refilling etc, as required ( copper plate earthing)                                                                      | 5     | Mtr  | 1,638.00  | 8,190.00  |
|                                                                                                               |        |                                                                                                                                                                                                                                                                                                |       |      |           | -         |
| 5                                                                                                             | 5.11   | Providing and fixing 25 mm x 5 mm GI strip in 40 mm dia G.I.pipe from earth electrode, including connection with brass nut bolts , spring washer, excavation and refilling etc, as required ( copper GI plate earthing)                                                                        | 15    | Mtr  | 755.00    | 11,325.00 |
|                                                                                                               |        |                                                                                                                                                                                                                                                                                                |       |      |           | -         |
| 6                                                                                                             | 5.16   | Providing & laying earth connection from earth electrode with 6 SWG dia GI WIRE from earth electrode including connection with GI thimble excavation and refilling etc as required. ( for GI pipe earthing of poles)                                                                           | 15.00 | Mtr  | 84.00     | 1,260.00  |
|                                                                                                               |        |                                                                                                                                                                                                                                                                                                |       |      |           | -         |
| 7                                                                                                             | 5.14   | Supply & Laying of 25 x 5 mm copper earth strip in surface /recess                                                                                                                                                                                                                             | 10    | Mtr  | 1,246.00  | 12,460.00 |
|                                                                                                               |        |                                                                                                                                                                                                                                                                                                |       |      |           | -         |
| 8                                                                                                             | 5.15   | Providing and fixing 25mm x 5 mm G.I. strips on surface or in recess for connections etc. as required                                                                                                                                                                                          | 7.5   | Mtr  | 287.00    | 2,152.50  |
|                                                                                                               |        |                                                                                                                                                                                                                                                                                                |       |      |           | -         |
| 9                                                                                                             | 2.21   | Providing and fixing MV danger notice plate of 200 mm x 150 mm made of mild steel atleast 2 mm thick and vitreous enameled white on both sides & with inscription in signal red colour on front side as required.( on 7mts poles & panels)                                                     | 8     | Nos  | 315.00    | 2,520.00  |
|                                                                                                               |        |                                                                                                                                                                                                                                                                                                |       |      |           |           |



| S.No. | DSR-25                  | Name of Item                                                                                                                                                                                                                                                                                                                                                                                                                              | Qty    | Unit  | Rate     | Amount            |
|-------|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-------|----------|-------------------|
|       |                         | <b>LT CABLES LAYING</b>                                                                                                                                                                                                                                                                                                                                                                                                                   |        |       |          |                   |
| 10    | 15.15<br>(DSR-2025 E&M) | Supplying and laying of following size DWC HDPE pipe ISI marked along with all accessories like socket, bend, couplers etc. conforming to IS 14930, Part II complete with fitting and cutting, jointing etc.direct in ground (75 cm below ground level) including excavation and refilling the trench but excluding sand cushioning and protective covering etc., complete as required.                                                   |        |       |          |                   |
|       | 15.15.1                 | 63 mm dia (OD-63 mm & ID-51 mm nominal)                                                                                                                                                                                                                                                                                                                                                                                                   | 200.00 | Rmt   | 136.00   | 27,200.00         |
|       | 15.15.2                 | 90 mm dia (OD-90 mm & ID-76 mm nominal)                                                                                                                                                                                                                                                                                                                                                                                                   | 140.00 | Rmt   | 183.00   | 25,620.00         |
|       | 15.15.3                 | 120 mm dia (OD-120 mm & ID-103 mm nominal)                                                                                                                                                                                                                                                                                                                                                                                                | 117.50 | Rmt   | 341.00   | 40,067.50         |
|       | 15.15.4                 | 160 mm dia (OD-160 mm & ID-135 mm nominal)                                                                                                                                                                                                                                                                                                                                                                                                | 60.00  | Rmt   | 385.00   | 23,100.00         |
|       |                         |                                                                                                                                                                                                                                                                                                                                                                                                                                           |        |       |          |                   |
| 11    | 11.1                    | Supplying and making end termination with brass compression gland and aluminium lugs for following size of PVC insulated and PVC sheathed/ XLPE aluminium conductor cable of 1.1 KV grade as required                                                                                                                                                                                                                                     |        |       |          |                   |
|       | 11.1.34                 | 4 Core 25 Sqmm                                                                                                                                                                                                                                                                                                                                                                                                                            | 22     | Nos   | 373.00   | 8,206.00          |
|       | 11.1.33                 | 4 Core 16 Sqmm                                                                                                                                                                                                                                                                                                                                                                                                                            | 4      | Nos   | 366.00   | 1,464.00          |
|       | 11.1.29                 | 3.5 Core 240 Sqmm                                                                                                                                                                                                                                                                                                                                                                                                                         | 6      | Nos   | 1,160.00 | 6,960.00          |
|       | 11.1.24                 | 3.5 Core 95 Sqmm                                                                                                                                                                                                                                                                                                                                                                                                                          | 10     | Nos   | 684.00   | 6,840.00          |
|       | 11.1.6                  | 2 Core 50 Sqmm                                                                                                                                                                                                                                                                                                                                                                                                                            | 10     | Nos   | 419.00   | 4,190.00          |
|       | 11.1.3                  | 2 Core 16 Sqmm                                                                                                                                                                                                                                                                                                                                                                                                                            | 22     | Nos   | 311.00   | 6,842.00          |
|       | 11.1.2                  | 2 Core 10 Sqmm                                                                                                                                                                                                                                                                                                                                                                                                                            | 144    | Nos   | 295.00   | 42,480.00         |
|       |                         |                                                                                                                                                                                                                                                                                                                                                                                                                                           |        |       |          |                   |
| 12    | 2.13                    | Excavating trenches of required width for pipes, cables, etc including excavation for sockets, and dressing of sides, ramming of bottoms, depth upto 1.5 m including getting out the excavated soil, and then returning the soil as required, in layers not exceeding 20 cm in depth including consolidating each deposited layer by ramming, watering, etc. and disposing of surplus excavated soil as directed, within a lead of 50 m : |        |       |          |                   |
|       | 2.13.1                  | All kinds of soil                                                                                                                                                                                                                                                                                                                                                                                                                         |        |       |          |                   |
|       | 2.13.1.2                | Pipes, cables etc. exceeding 80 mm dia. but not exceeding 300 mm dia.                                                                                                                                                                                                                                                                                                                                                                     | 60.5   | Meter | 998.65   | 60,418.33         |
|       |                         |                                                                                                                                                                                                                                                                                                                                                                                                                                           |        |       |          |                   |
| 13    | 19.6                    | Providing and laying non-pressure NP2 class (light duty) R.C.C. pipes with collars jointed with stiff mixture of cement mortar in the proportion of 1:2 (1 cement : 2 fine sand) including testing of joints etc. complete :                                                                                                                                                                                                              |        |       |          |                   |
|       | 19.6.2                  | 150 mm dia. R.C.C. pipe                                                                                                                                                                                                                                                                                                                                                                                                                   | 60.5   | Meter | 556.45   | 33,665.23         |
|       |                         |                                                                                                                                                                                                                                                                                                                                                                                                                                           |        |       |          |                   |
|       |                         | <b>Total</b>                                                                                                                                                                                                                                                                                                                                                                                                                              |        |       |          | <b>355,973.55</b> |
|       |                         |                                                                                                                                                                                                                                                                                                                                                                                                                                           |        |       |          |                   |

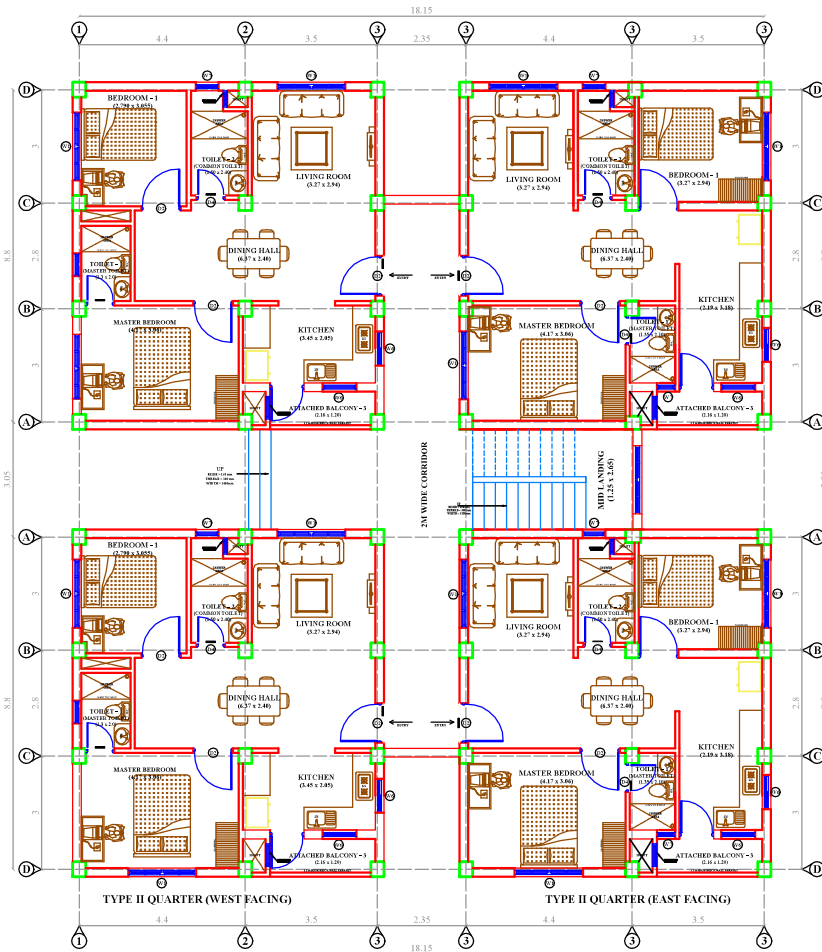

TYPE II AREA STATEMENT

TOTAL PLINTH AREA = 346.74 SQ.M  
ONE UNIT = 75 SQ.M  
CORRIDOR WITH STAIRCASE = 38 SQ.M

- NOTES:-
1. THIS DRAWING IS THE PROPERTY OF M/S TRIPATHI & ASSOCIATES & IT SHALL NOT BE REPRODUCED IN ANY FORM WHATSOEVER WITHOUT THE WRITTEN PERMISSION.
  2. ALL DIMENSIONS ARE GIVEN IN MM. & ONLY WRITTEN DIMENSIONS TO BE FOLLOWED.
  3. ANY DISCREPANCY IN THE DRW. SHALL BE BROUGHT TO THE NOTICE OF THE ARCHITECTS BEFORE EXECUTION OF THE WORK.
  4. RELEASE FOR CONSTRUCTION.
  5. THIS DRW. SHOULD BE EXECUTED IN COORDINATION WITH THE STRUCTURAL DRW. BEFORE ENSURING COMPLETE SAFETY OF THE WORK.

ARCHITECT SIGN

TRIPATHI & ASSOCIATES  
ARCHITECTS, PLANNERS & INTERIOR DESIGNERS  
D-136, SECTOR-50, NOIDA-201301  
MOB: 9350184847, 9910006935

CLIENT

NAVODAYA VIDYALAYA SAMITI

PROJECT  
JAWAHAR NAVODAYA VIDYALAYA,  
AZAMGARH, U.P.

DWG. TYPE-II (G+1)

DWG TITLE:  
TYPICAL FLOOR PLAN

DATE: 12-05-2028


DWG NO:-

DRN BY: BHAGWAN PRASAD

SCALE:

CONSTRUCTION AGENCY:

TELECOMMUNICATIONS CONSULTANTS INDIA LIMITED  
(A Government of India Enterprise)  
TCIL Bhawan, Greater Kailash-I, New Delhi-110048  
Tel: +91-11-26202020  
www.tcil-india.com Fax: +91-11-26242266  
Email: atul.jain@tcil-india.com  
CIN No.: U74999DL1978G0008911

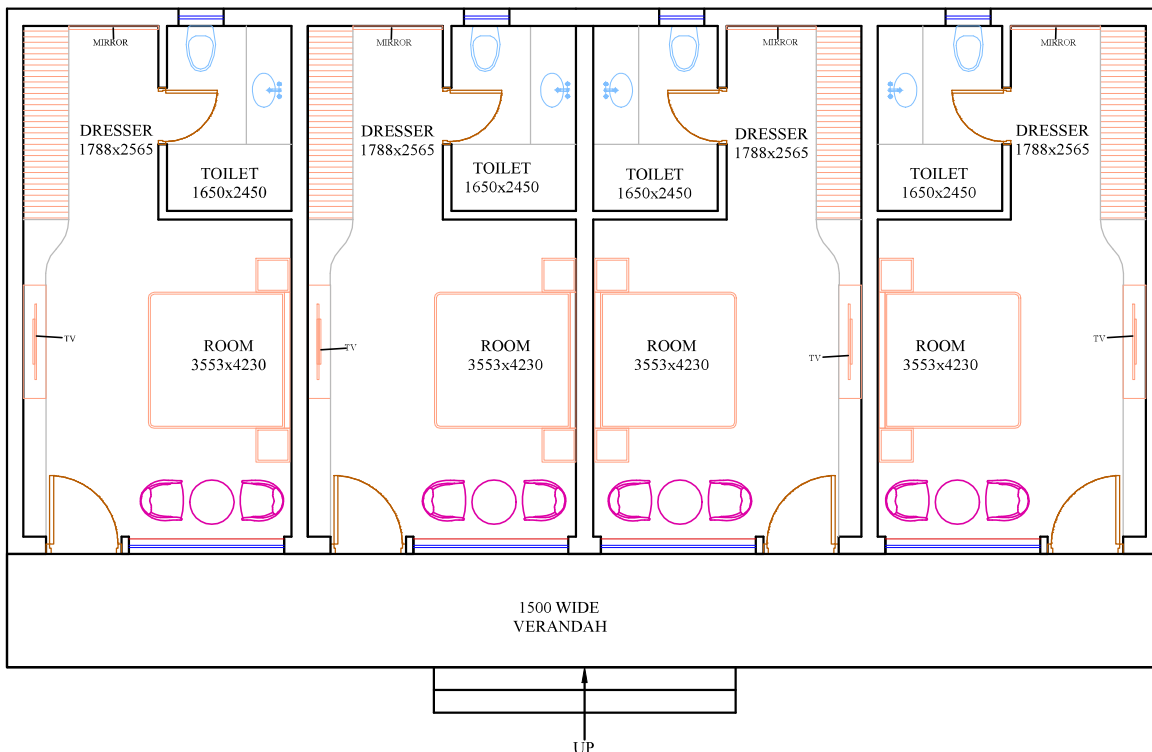

#### GUEST HOUSE

TOTAL PLINTH AREA = 133.49 SQ.M  
ONE UNIT = 27.63 SQ.M  
VERANDAH = 22.95 SQ.M

#### NOTES:-

1. THIS DRAWING IS THE PROPERTY OF M/S TRIPATHI & ASSOCIATES & IT SHALL NOT BE REPRODUCED IN ANY FORM WHATSOEVER WITHOUT THE WRITTEN PERMISSION.
2. ALL DIMENSIONS ARE GIVEN IN MM. & ONLY WRITTEN DIMENSIONS TO BE FOLLOWED.
3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ARCHITECTS BEFORE EXECUTION OF THE WORK.
4. RELEASE FOR CONSTRUCTION.
5. THIS DRAWING SHOULD BE EXECUTED IN COORDINATION WITH THE STRUCTURAL DRAWING BEFORE ENSURING COMPLETE SAFETY OF THE WORK.

#### ARCHITECT SIGN

TRIPATHI & ASSOCIATES  
ARCHITECTS, PLANNERS, INTERIOR DESIGNERS  
D-136, SECTOR-50, NOIDA-201301  
MOB: 9350184847, 9910006935

#### CLIENT

NAVODAYA VIDYALAYA SAMITI

#### PROJECT

JAWAHAR NAVODAYA VIDYALAYA,  
AZAMGARH, U.P.

#### DWG.

GUEST HOUSE (G)

#### DWG TITLE

GROUND FLOOR PLAN

DATE: 12-05-2028


DWG NO.: --

DRN BY: BHAGWAN PRASAD

SCALE:

#### CONSTRUCTION AGENCY:

TELECOMMUNICATIONS CONSULTANTS INDIA LIMITED  
(A Government of India Enterprise)  
TCIL Bhawan, Greater Kailash-I, New Delhi-110048  
Tel: +91-11-26202020  
www.tcil-india.com Fax: +91-11-26242266  
Email: atul.jain@tcil-india.com  
CIN No.: U74999DL1978GOI008911

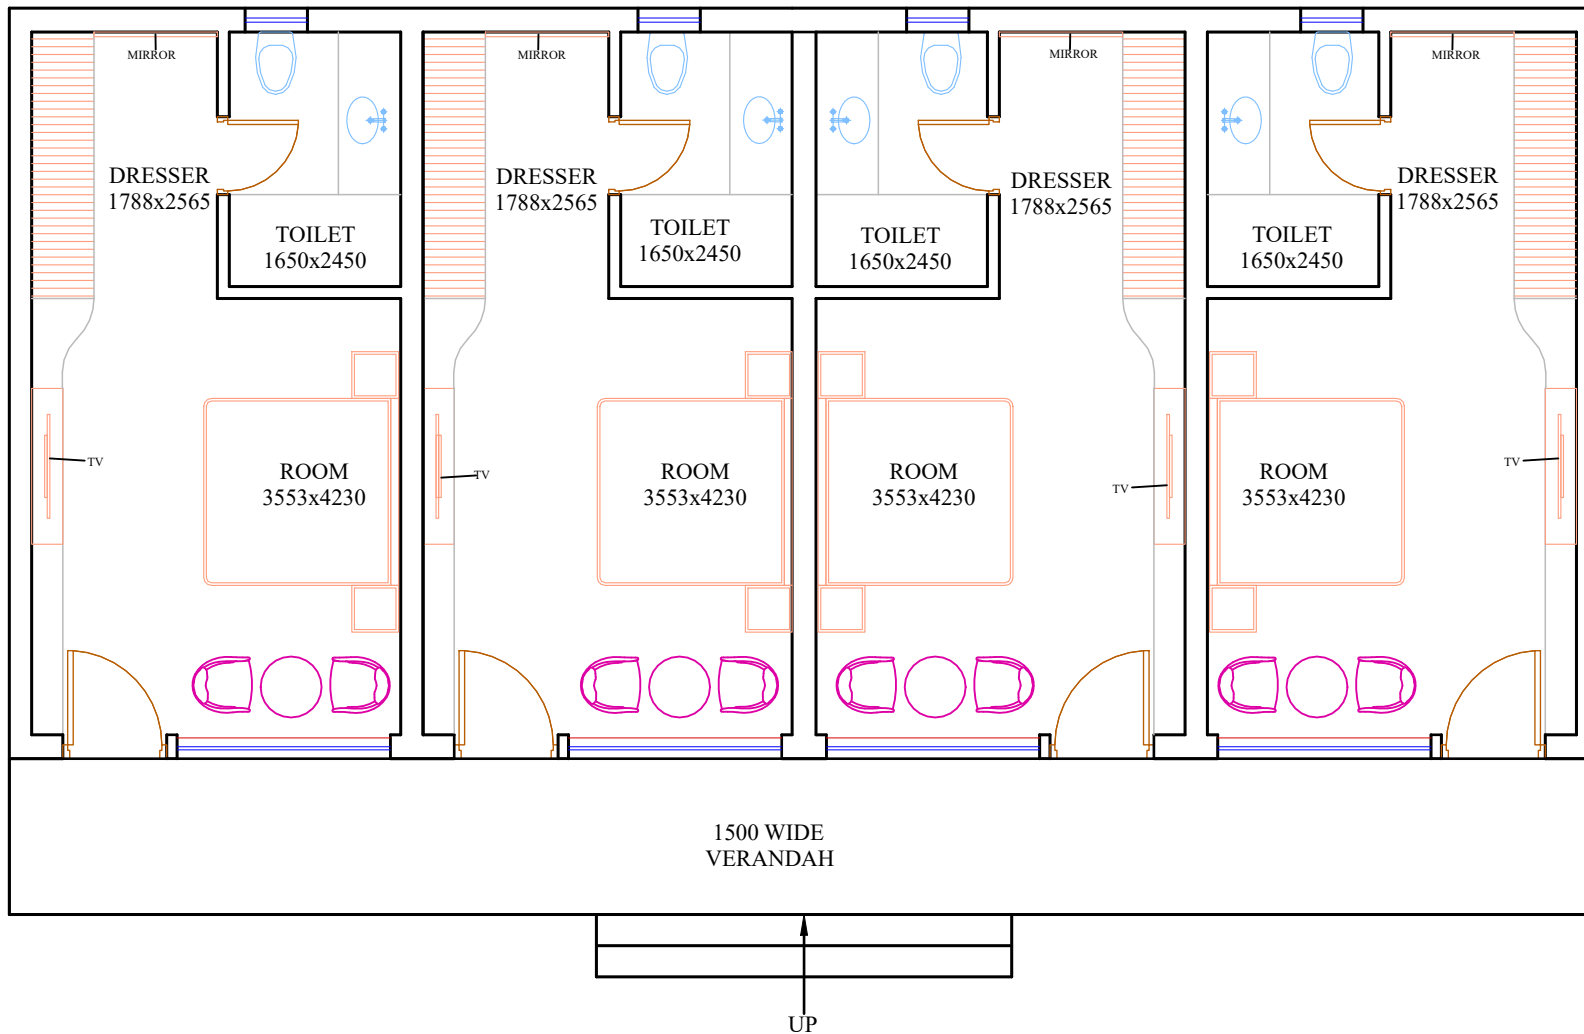

### GUEST HOUSE

TOTAL PLINTH AREA = 133.49 SQ.M  
ONE UNIT = 27.63 SQ.M  
VERANDAH = 22.95 SQ.M

#### NOTES:-

1. THIS DRAWING IS THE PROPERTY OF M/S TRIPATHI & ASSOCIATES & IT SHALL NOT BE REPRODUCED IN ANY FORM WHATSOEVER WITHOUT THE WRITTEN PERMISSION
2. ALL DIMENSION ARE GIVEN IN MM. & ONLY WRITTEN DIMENSIONS TO BE FOLLOWED.
3. ANY DISCREPANCY IN THE DRW. SHALL BE BROUGHT TO THE NOTICE OF THE ARCHITECTS BEFORE EXECUTION OF THE WORK.
4. RELEASE FOR CONSTRUCTION.
5. THIS DRW. SHOULD BE EXECUTED IN COORDINATION WITH THE STRUCTURAL DRW. BEFORE ENSURING COMPLETE SAFETY OF THE WORK.

#### ARCHITECT SIGN

TRIPATHI & ASSOCIATES  
ARCHITECTS, PLANNERS & INTERIOR DESIGNERS  
D-136, SECTOR-50, NOIDA-201301  
MOB: 9350184847, 9910006931  
CLIENT

NAVODAYA VIDYALAYA SAMITI

PROJECT  
JAWAHAR NAVODAYA VIDYALAYA,  
AZAMGARH, U.P.

#### DWG.

GUEST HOUSE (G)

#### DWG TITLE:

GROUND FLOOR PLAN

DATE: 12-05-2026


DWG.NO.: -

DRN BY: BHAGWAN PRASAD

SCALE:

#### CONSTRUCTION AGENCY:

TELECOMMUNICATIONS CONSULTANTS INDIA LIMITED  
(A Government of India Enterprise)  
TCIL Bhawan, Greater Kailash-I, New Delhi-110048  
Tel: +91-11-26202020  
www.tcil-india.com Fax: +91-11-26242266  
Email: otuljoin@tcil-india.com  
CIN No.: U74999DL1978GOI008911

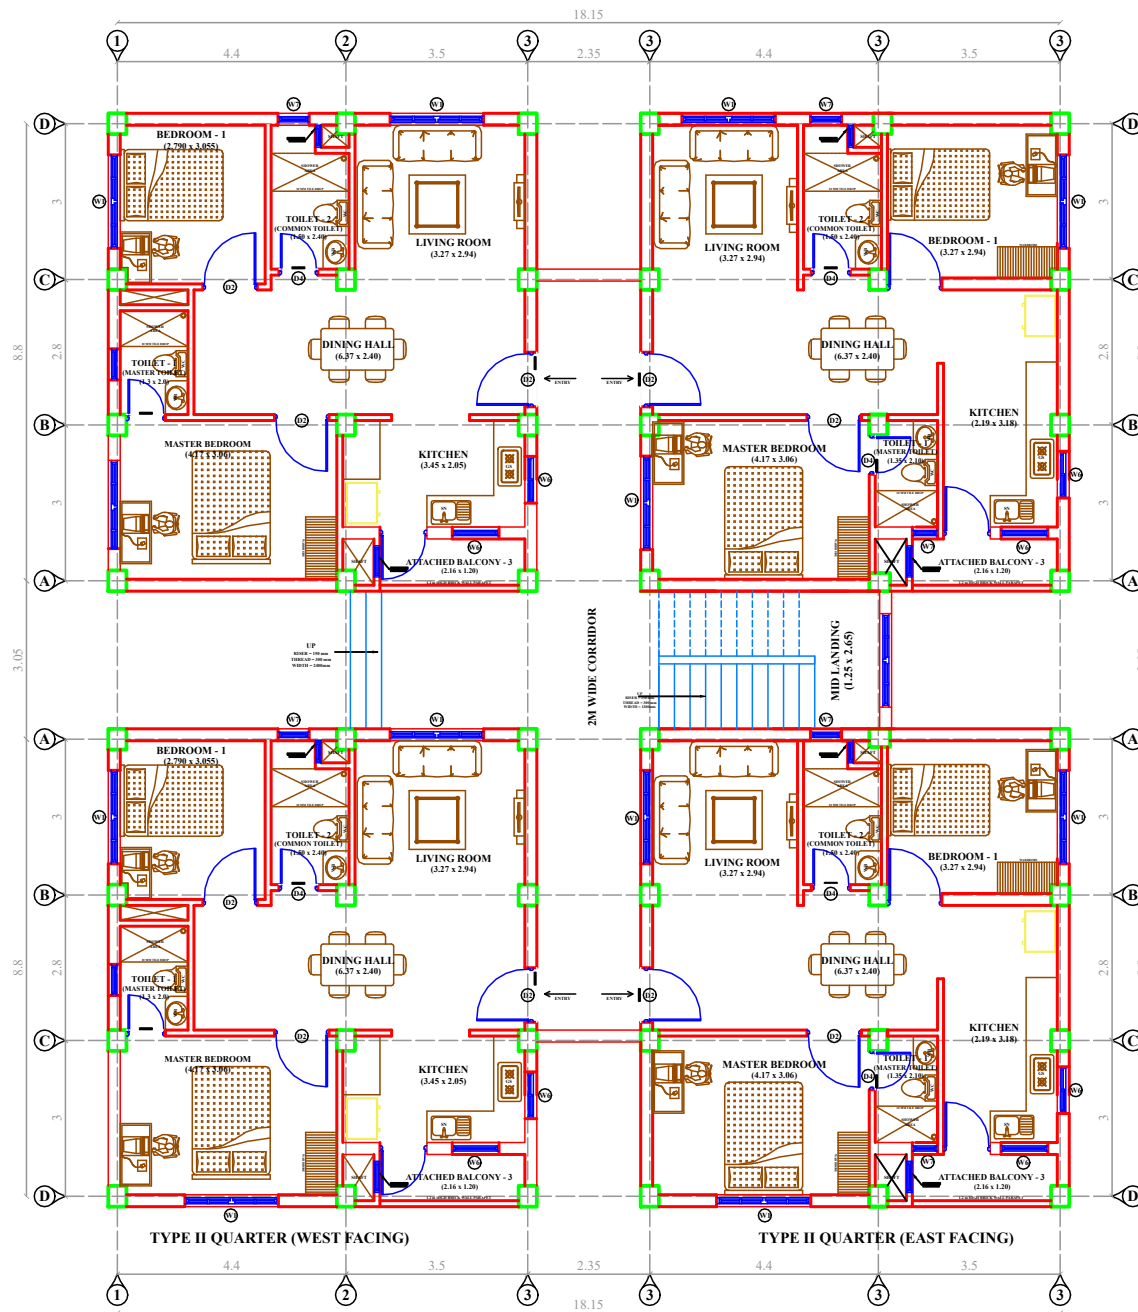

## TYPE II AREA STATEMENT

**TOTAL PLINTH AREA = 346.74 SQ.M**  
**ONE UNIT = 75 SQ.M**  
**CORRIDOR WITH STAIRCASE = 38 SQ.M**

### NOTES:-

1. THIS DRAWING IS THE PROPERTY OF M/S TRIPATHI & ASSOCIATES & IT SHALL NOT BE REPRODUCED IN ANY FORM WHATSOEVER WITHOUT THE WRITTEN PERMISSION.
2. ALL DIMENSION ARE GIVEN IN MM. & ONLY WRITTEN DIMENSIONS TO BE FOLLOWED.
3. ANY DISCREPANCY IN THE DRW. SHALL BE BROUGHT TO THE NOTICE OF THE ARCHITECTS BEFORE EXECUTION OF THE WORK.
4. RELEASE FOR CONSTRUCTION.
5. THIS DRW. SHOULD BE EXECUTED IN COORDINATION WITH THE STRUCTURAL DRW. BEFORE ENSURING COMPLETE SAFETY OF THE WORK.

ARCHITECT SIGN

TRIPATHI & ASSOCIATES  
 ARCHITECTS, PLANNERS & INTERIOR DESIGNERS  
 D-136, SECTOR-50, NOIDA-201301  
 MOB: 9350184847, 9910006931  
 CLIENT

NAVODAYA VIDYALAYA SAMITI

PROJECT  
 JAWAHAR NAVODAYA VIDYALAYA,  
 AZAMGARH, U.P.

DWG.

TYPE-II (G+1)

DWG TITLE:

TYPICAL FLOOR PLAN

DATE: 12-05-2026

DWG.NO.: -

DRN BY: BHAGWAN PRASAD

SCALE:

CONSTRUCTION AGENCY:

TELECOMMUNICATIONS CONSULTANTS INDIA LIMITED  
 (A Government of India Enterprise)  
 TCIL Bhawan, Greater Kailash-I, New Delhi-110048  
 Tel: +91-11-26202020  
 www.tcil-india.com Fax: +91-1126242266  
 Email: otuljoin@tcil-india.com  
 CIN No.: U74999DL1978G01008911